INLUX
ITALIA
NEXOLUCE

INLUX
ITALIA

CONTENTS

BRAND PHILOSOPHY p. 9
INDEX PRODUCTS p. 10
SYMBOLOGY p. 274
CODES STRUCTURE p. 275

CATEGORIES

RECESSED p. 17
SURFACE p. 135
PROJECTOR-HIGH BAY p. 185
SIGNAGE p. 225
STRIP p. 233
TRACK p. 253
ACCESSORIES p. 265

© INLUX ITALIA is a brand of NEXO LUCE Srl, a company incorporated in Italy.
The logo and the name are the property of Nexo Luce Srl.
The present catalogue and its content in whole or in part are the property of Nexo Luce Srl. All rights reserved.
We reserve the right to change details and specifications without prior written notice.

© JUNE 2020 - RELEASE 04

INLUX ITALIA is a brand of Nexo Luce Srl that has been created with an objective to assist clients in meeting budget constraints, whilst still getting a quality guaranteed through our Italian factory.

INLUX ITALIA's products are manufactured outside Italy according to our specifications; rigorous controls occur both in the production factory and in our factory in Italy.

Warranty is given by Nexo Luce Srl, Italy.

Products manufactured under our brand INLUX ITALIA are mainly indoor technical lighting.

INLUX ITALIA è un marchio di Nexo Luce Srl che è stato creato con l'obiettivo di assistere il cliente nel soddisfare eventuali esigenze di budget ma ottenendo, al contempo, la qualità garantita dalla nostra azienda italiana.

Gli apparecchi INLUX ITALIA sono prodotti all'estero seguendo le nostre specifiche; controlli rigorosi vengono effettuati sia nella fabbrica d'origine che presso il nostro stabilimento in Italia.

La garanzia viene rilasciata da Nexo Luce Srl, Italia.

Gli apparecchi prodotti sotto il marchio INLUX ITALIA sono principalmente destinati all'illuminazione tecnica di interni.

RECESSED

Pupilla 5
p.18


Pupilla 5 IP
p.20

Noce 5
p.22

Noce 9
p.24

Noce 15
p.26

Noce Q 5
p.28


Noce Q 9
p.30


Noce Q15
p.32

Cornice 1
p.34

Cornice 2
p.36

Cornice 3
p.38

Occhio 5
p.40

Occhio 10
p.42

Occhio 15
p.44

Occhio 20
p.46

Occhio 24
p.48

Occhio 30
p.50


Occhio 5 ADJ
p.52


Occhio 10 ADJ
p.54

Occhio 15 ADJ
p.56

Occhio 20 ADJ
p.58

Occhio 24 ADJ
p.60

Occhio 30 ADJ
p.62

Retina 5
p.64

Retina 10
p.66

Retina 15
p.68

Retina 20
p.70

Retina 24
p.72

Retina 30
p.74

Oblò 6
p.76

Oblò 12
p.78

Oblò 18
p.80

Oblò 24
p.82

Oblò 30
p.84

Quablò 6
p.86

Quablò 12
p.88

Quablò 18
p.90

Quablò 24
p.92

Quablò 30
p.94

Plafò 30
p.96

Plafò 40
p.98

Plafò 50
p.100

Plafò 70
p.102

Regolo S 18
p.104

Regolo S 24
p.106

Regolo S 30
p.108

Regolo M 36
p.110

Regolo M 40
p.112

Regolo M 50
p.114

Regolo M 72
p.116

Regolo L 60
p.118

Regolo L 72
p.120

Regolo L 84
p.122

Piano
p.124

Bandiera Q
p.126

Segno
p.128

Segno Q
p.130

Segno M
p.132

SURFACE

Specchio
p.136

Specchio S
p.138

Specchio 4
p.140

Doppio fascio
p.142

Fascio verticale
p.144

Blocchetto
p.146

Blocchetto IP65
p.148


Blocchetto S
IP65 p.150

Tronchetto Led
p.152

Tronchetto Q
Led p.154

Cippo 17 Led
p.156

Cippo 29 Led
p.158


Cofanetto Q
Led p.160

Cofanetto T
Led p.162

Sole
p.164

Sole 2
p.166

Tartaruga T
p.168

Tartaruga
p.170

Tartaruga 2
p.172

Tartaruga 3
p.174

Stagna 18 Led
p.176

Stagna 28 Led
p.178

Stagna 36 Led
p.180

Stagna 50 Led
p.182

PROJECTOR-HIGH BAY

Drillo 50 N
p.186


Drillo 100 N
p.188

Drillo 150 N
p.190

Campo 240
p.192

Campo 320
p.194

Campo 480
p.196

Campo 720
p.198

Campo 960
p.200

Campo 1200
p.202

Campo 1440
p.204

Mira 100
p.206

Mira 150
p.208

Mira 200
p.210

Rimessa 60
p.212

Rimessa 90
p.214

Rimessa 120
p.216

Rimessa 150
p.218

Rimessa 180
p.220

Guardia
p.222

SIGNAGE

Fuga Led
p.226

Uscita 4
p.228

Emergenza
IP65 p.230

STRIP

Strip Inlux Led
LB p.234

Strip Inlux Led
HB p.236

Riga LB
p.238

Riga HB
p.240

Riga Incasso LB
p.242

Riga Incasso HB
p.244

Gomma H
p.246

Gomma V
p.248


Riga Scala
p.250

TRACK

Freccia S
p.254

Freccia M
p.256

Freccia L
p.258


Binario 2
p.260


Binario 2 R
p.262

ACCESSORIES

Gomma H
p.266

Gomma V
p.268



Binario 2
p.270



Binario 2 R
p.272

LUCE®

RECESSED

PUPILLA 5

CEILING RECESSED

IP54

LED

5W

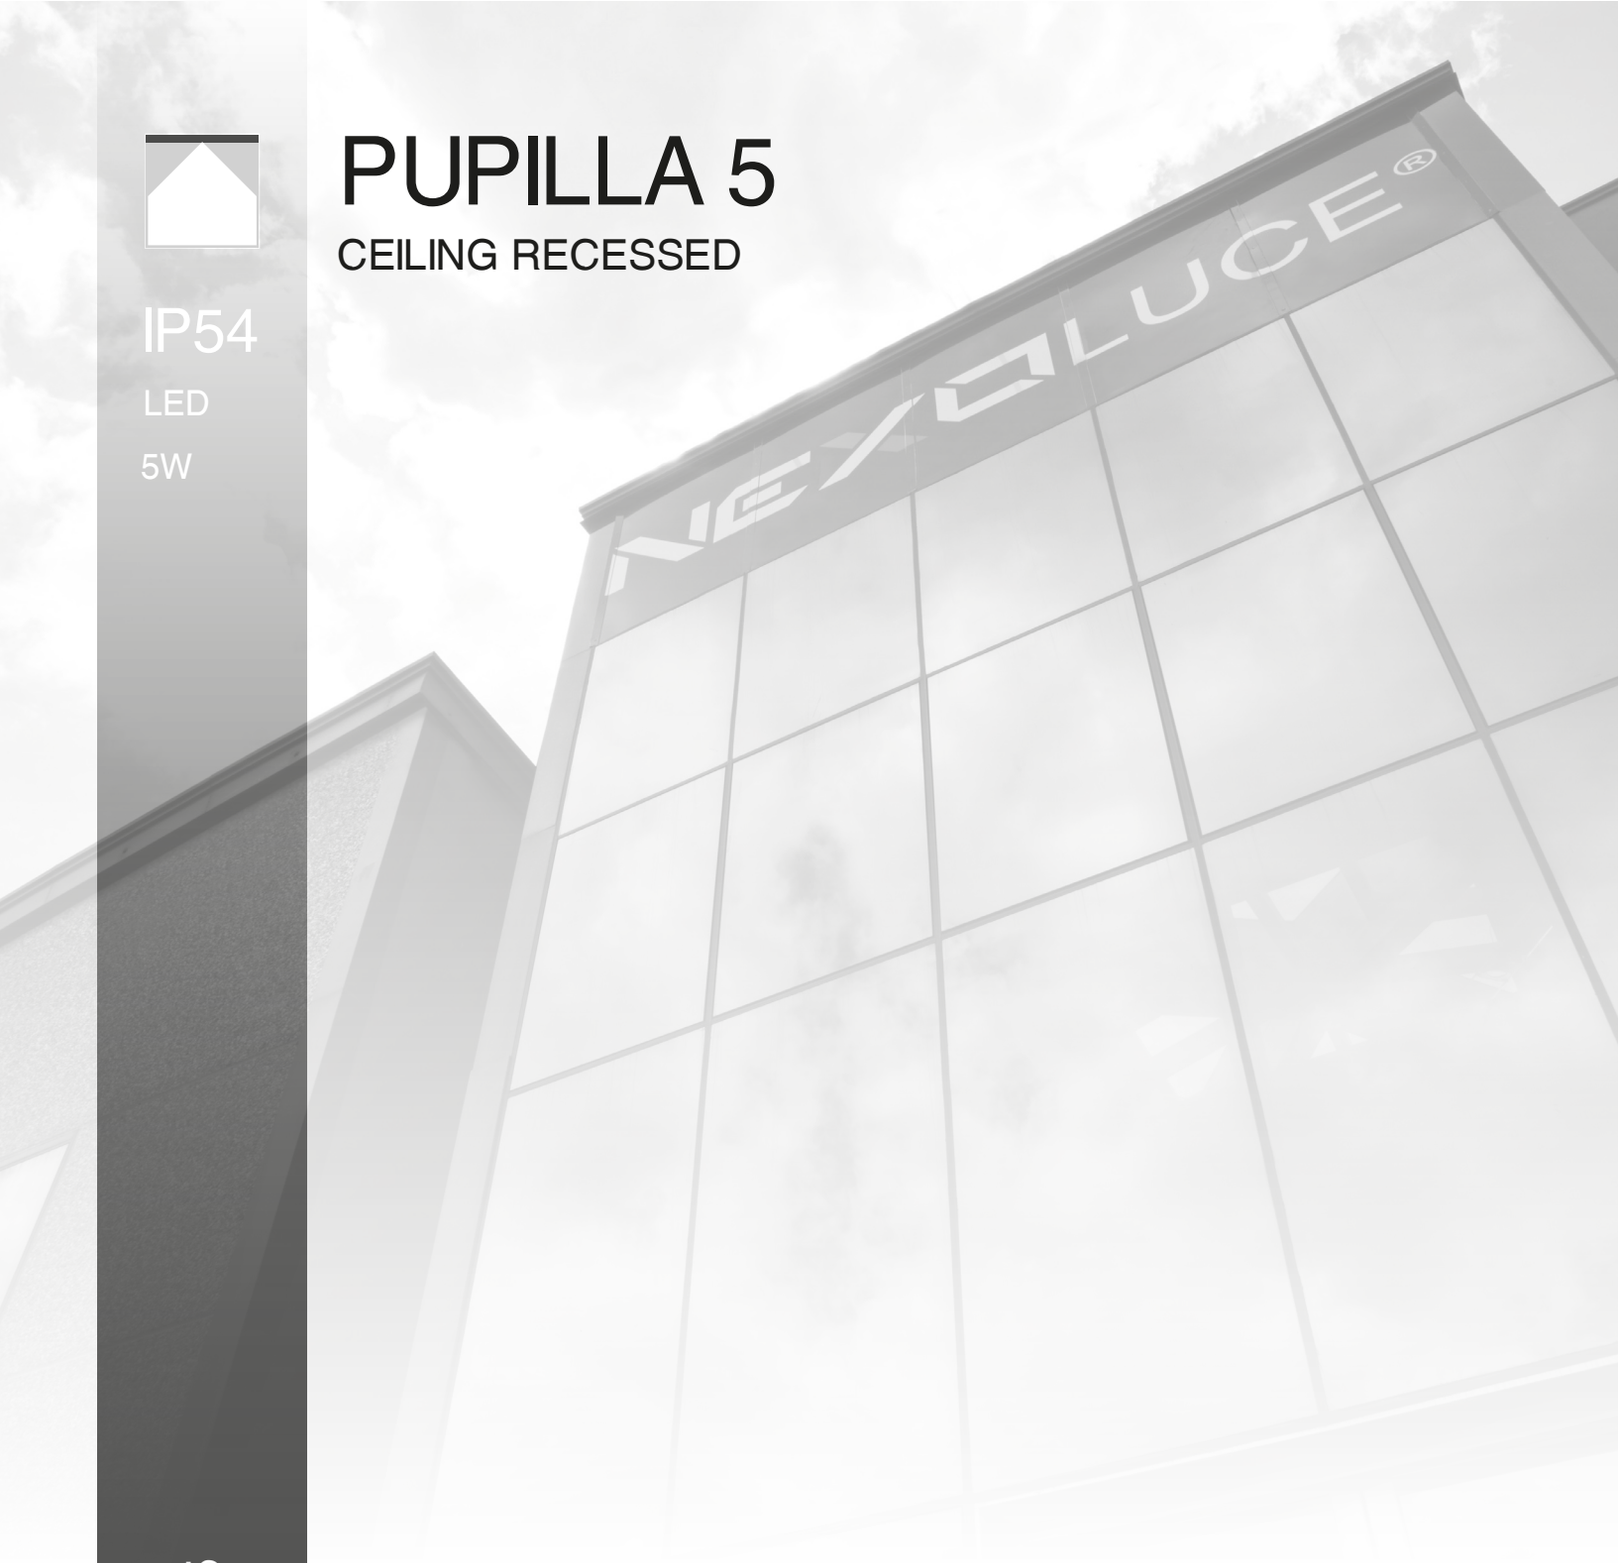

cod. 5234 /// PUPILLA 5

- *Circular recessed downlight with two different IP protection degree: IP54 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Clear glass cover*
- *Springs for installation*
- *GU10 lamp holder*

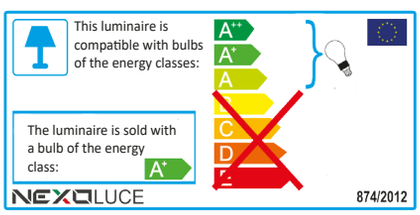





Ø 60



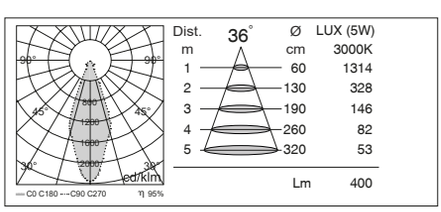

IP54 Front IP20 Back

Lamp	Input	Power
GU10 LED	220/240Vac 50/60Hz	5 W

LAMP INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5234	**.** WITHOUT EM. KIT	**0** IP54/IP20	**1** GU10	**.05** 5 W	**AX** CLEAR DIFFUSER	**1** ON / OFF	**.A** WHITE
				A05 5 W (450 lm)			**.B** GREY
							.D BLACK
							.F POLISH GOLD
							.J POLISH CHROME

CODE EXAMPLE:
Recessed downlight with GU10 lamp, IP54/20, 5W, clear diffuser, ON/OFF control, frame white color without emergency kit **5234.01.05AX1.A**

PUPILLA 5 IP

CEILING RECESSED

IP54

LED

5W

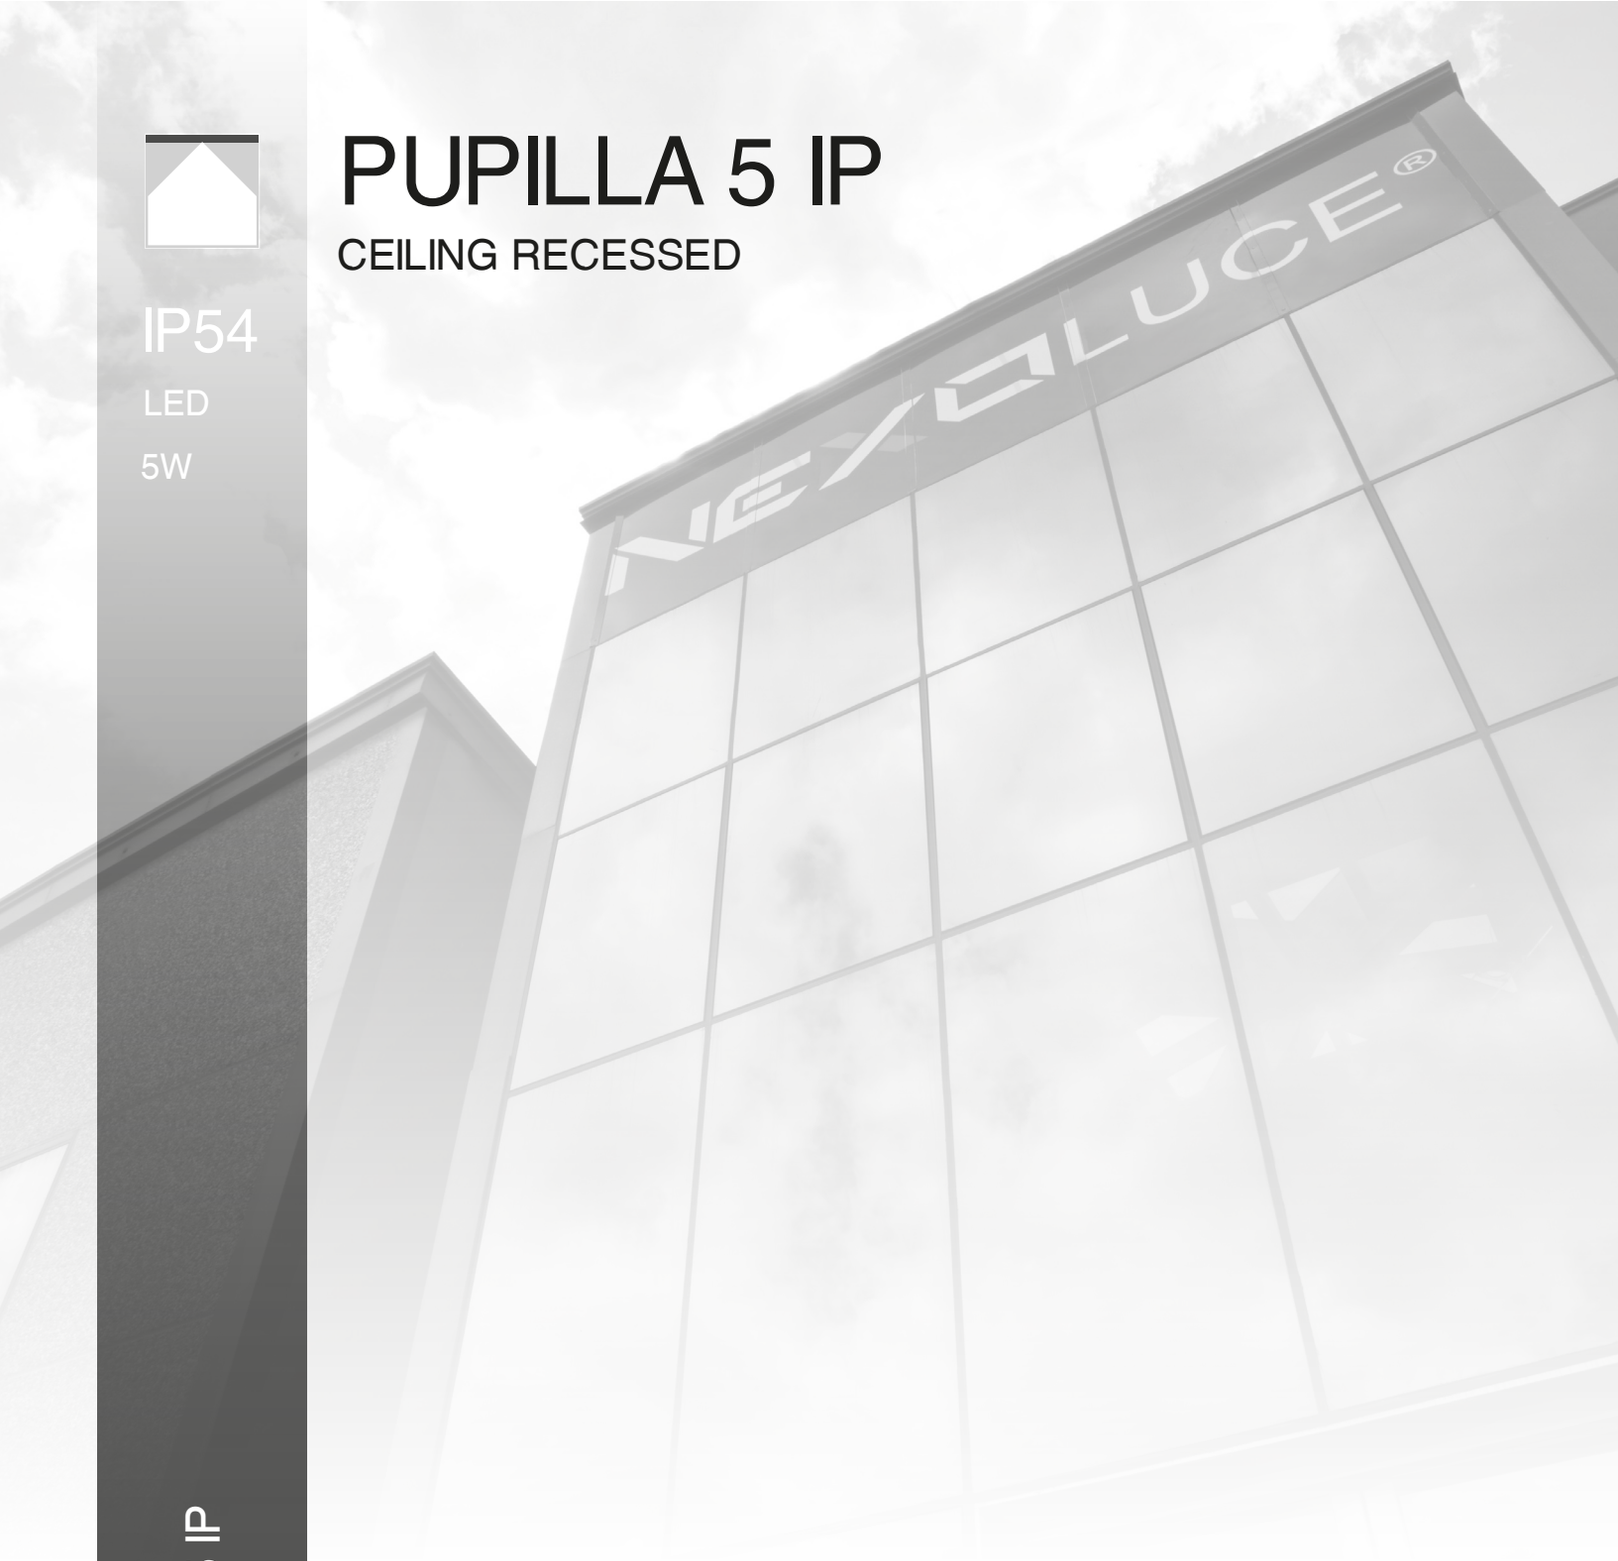

cod. 5235 /// PUPILLA 5 IP

- *Circular recessed downlight with two different IP protection degree: IP54 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Frosted glass cover*
- *Springs for installation*
- *GU10 lamp holder*

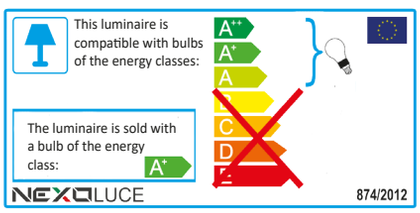





Ø 72



IP54 Front IP20 Back

Lamp	Input	Power
GU10 LED	220/240Vac 50/60Hz	5 W

LAMP INCLUDED

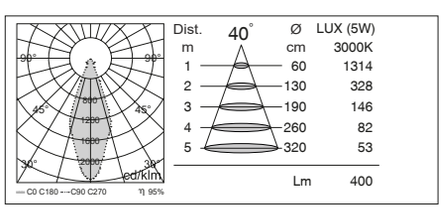

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5235	**.** WITHOUT EM. KIT	**0** IP54/IP20	**1** GU10	**.05** 5 W	**.H** 40°	**1** ON / OFF	**.A** WHITE
							.B GREY
							.D BLACK
							.F POLISH GOLD
							.J POLISH CHROME

CODE EXAMPLE:
Recessed downlight with with GU10 lamp, IP54/20, 5W, 40° optic, ON/OFF control, frame white color without emergency kit **5235.01.05.H1.A**

NOCE 5

CEILING RECESSED

IP40

LED

5W

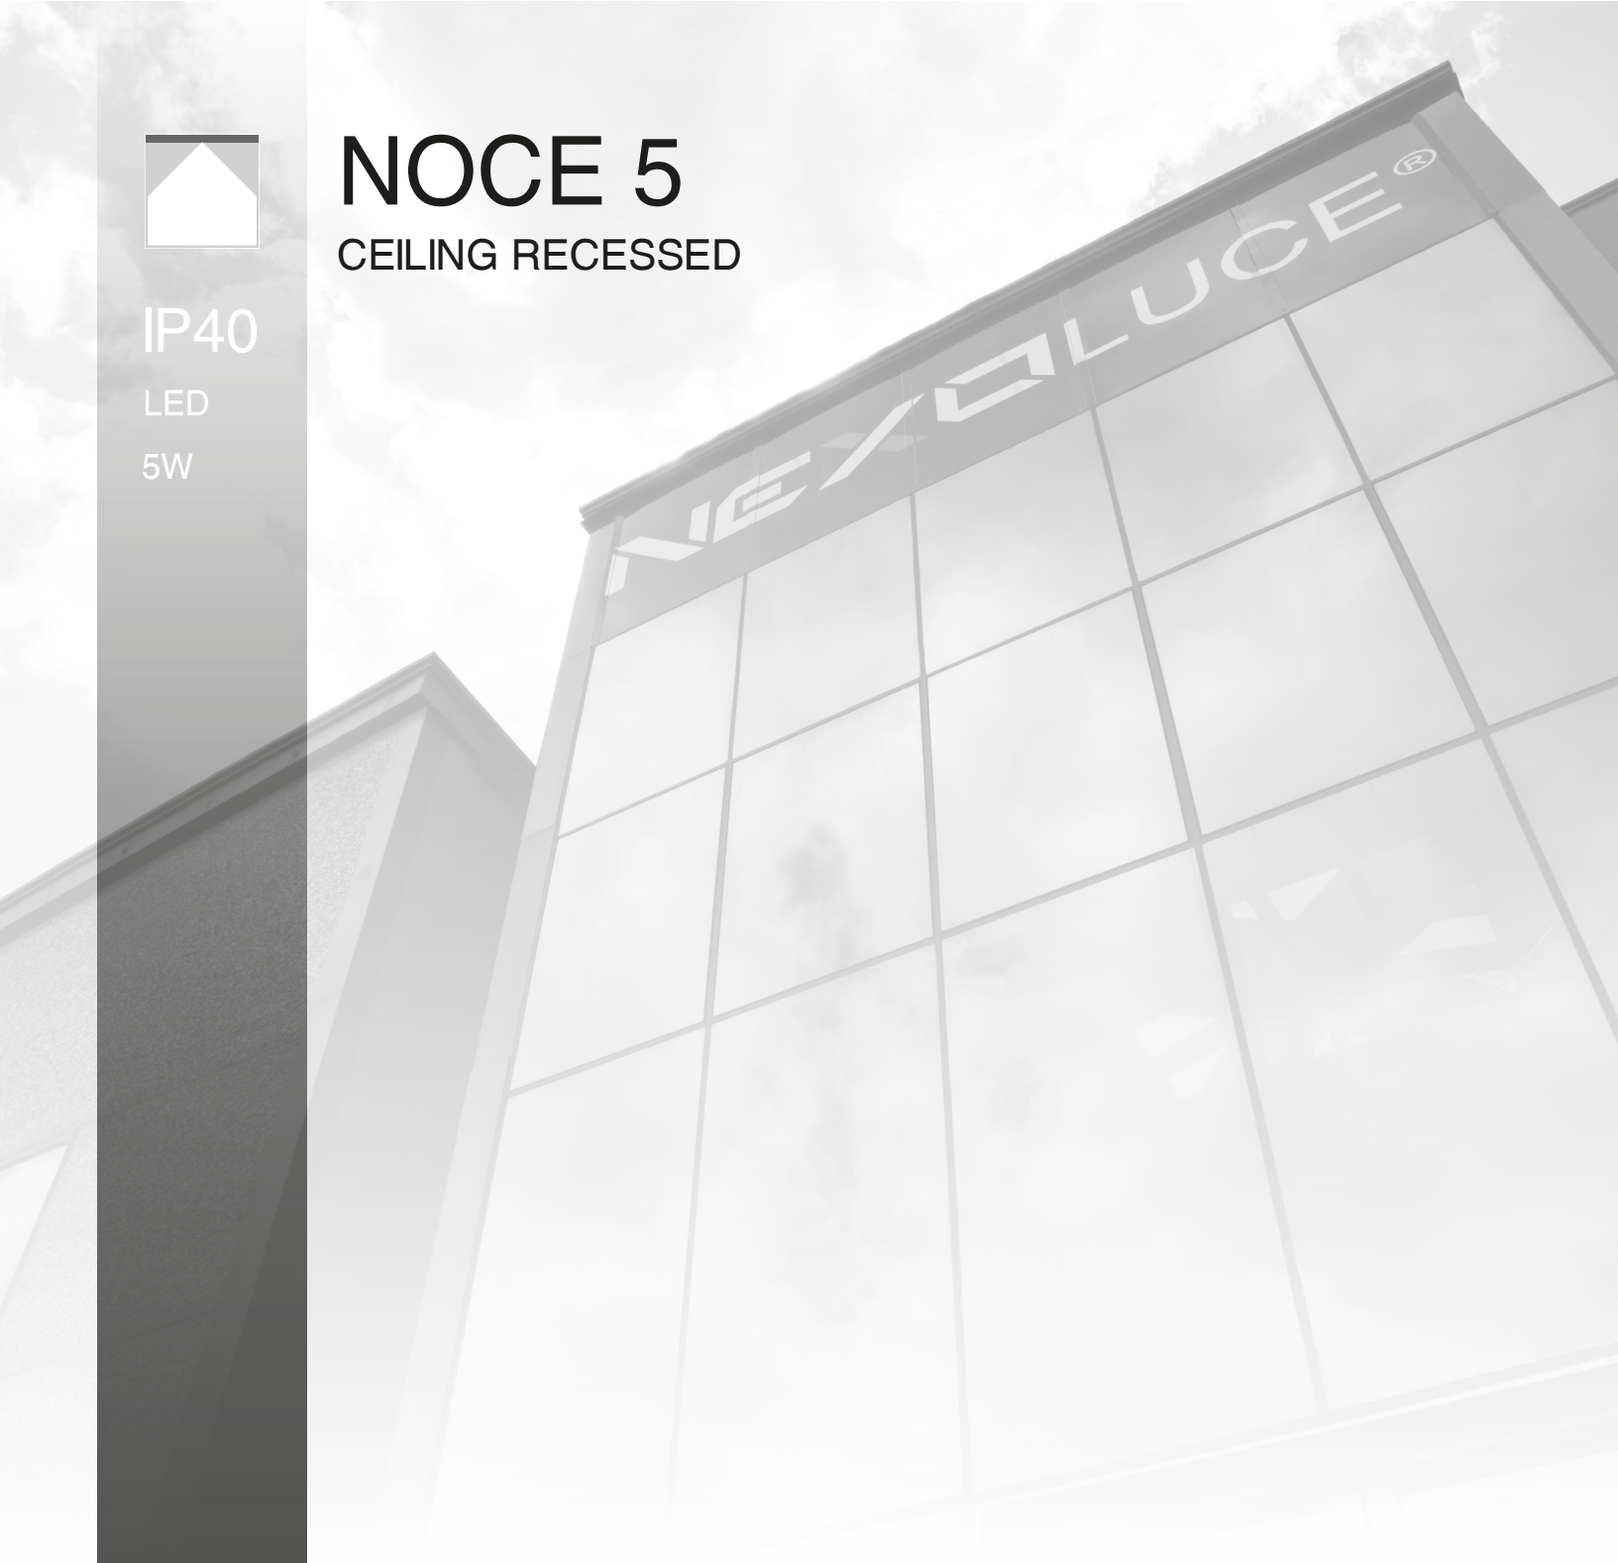

cod. 5326 /// NOCE 5

- *Recessed trimless circular downlight*
- *Metal body*
- *Transparent glass diffuser*
- *Power supply included*

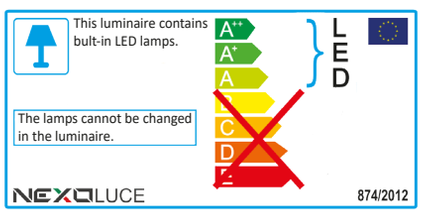





Ø 62



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5326	**.** WITHOUT EM. KIT	**2** IP40	**A** 2700 K	**.05** 5W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			B 3000 K		**BE** 24°	**8** DIMM. 1-10V	**.B** GREY
			C 4000 K		**BD** 38°		**.D** BLACK
					BA 60°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP40, 5W, 60° optic, ON/OFF control, frame white color without emergency kit **5326.2B.05BA1.A**

NOCE 9

CEILING RECESSED

IP40

LED

9W

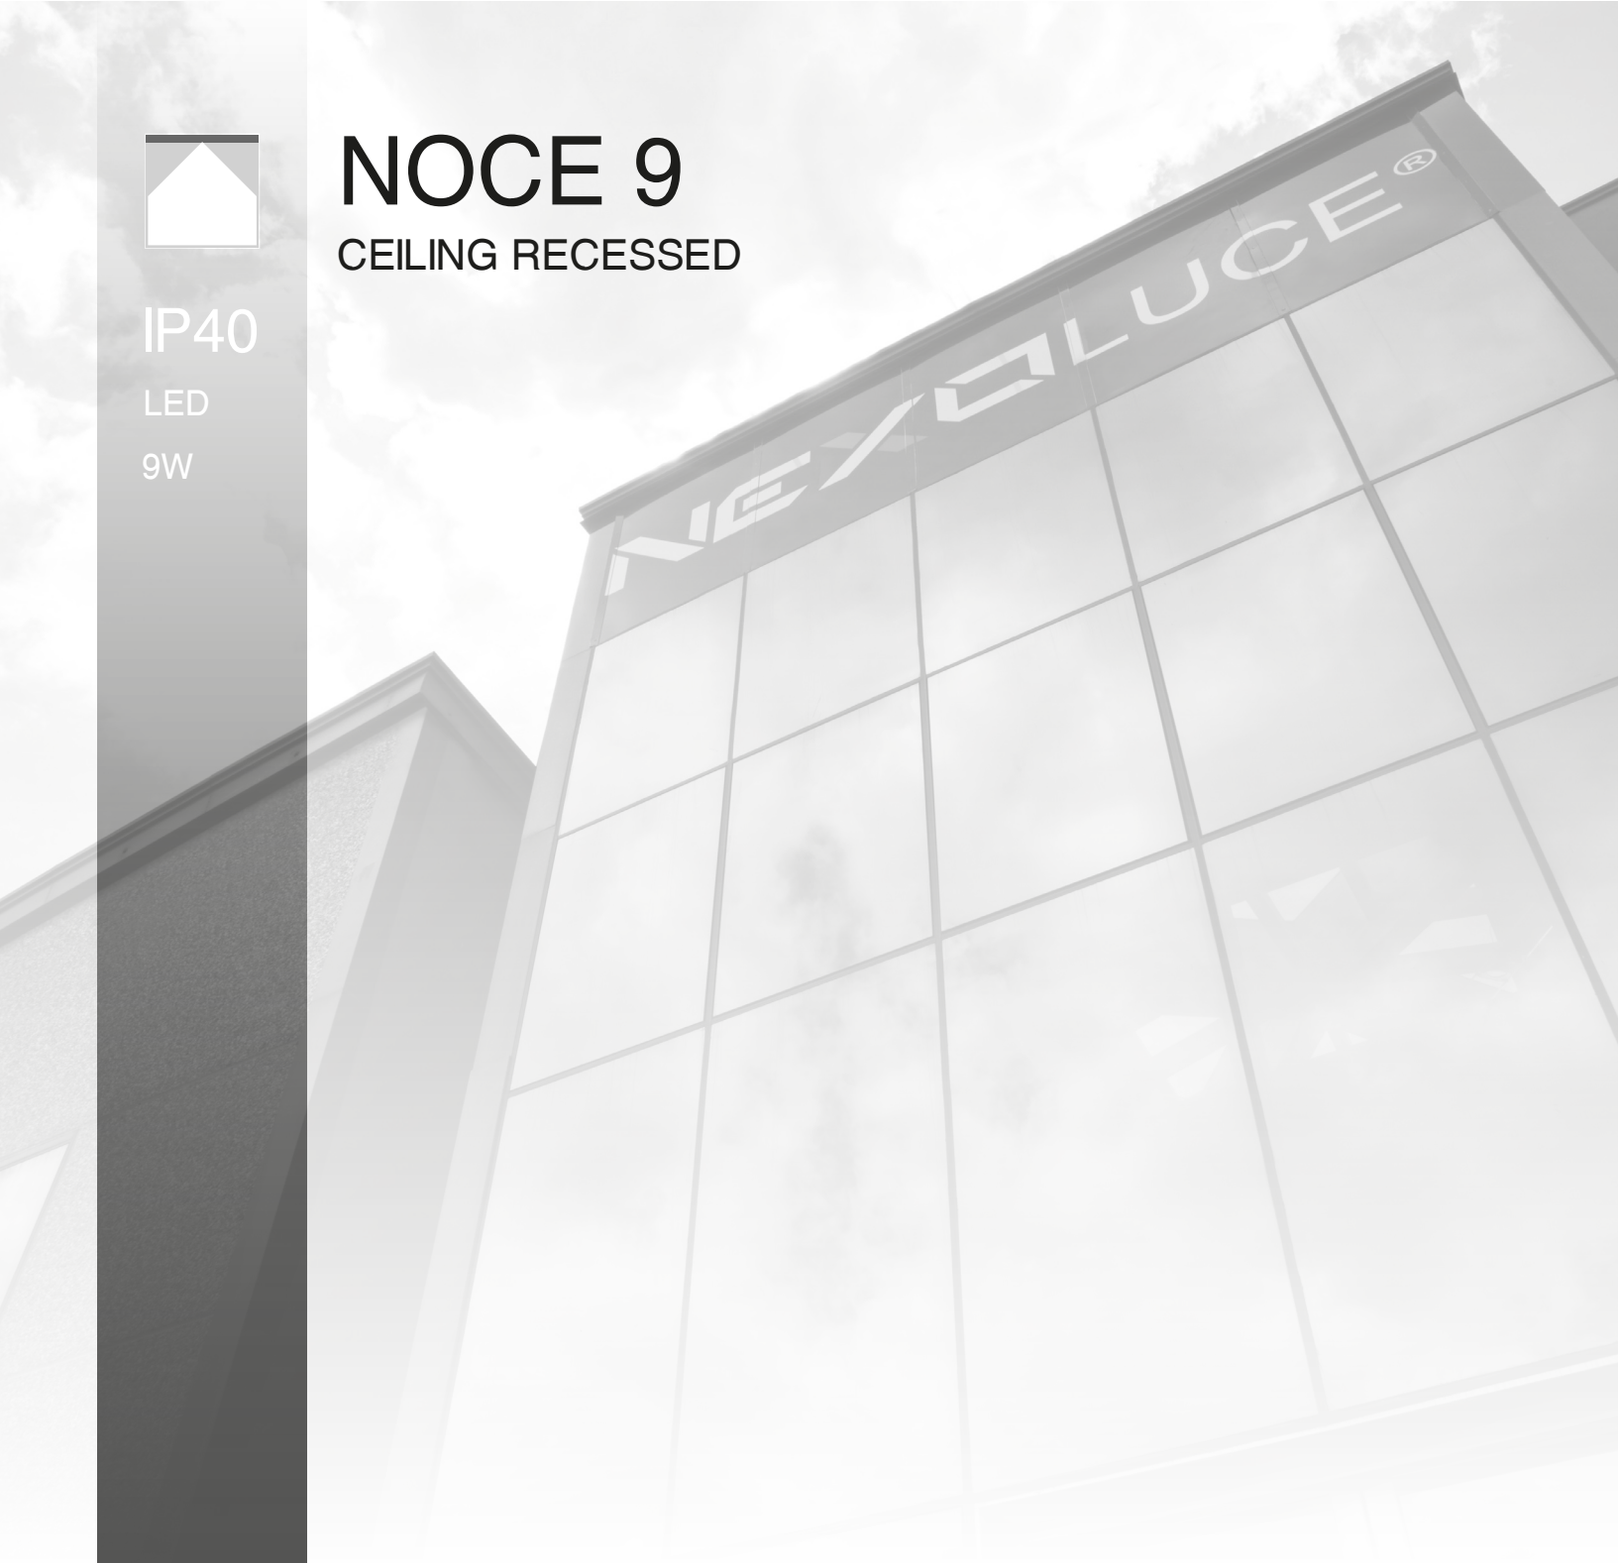

cod. 5308 /// NOCE 9

- *Recessed trimless circular downlight*
- *Metal body*
- *Transparent glass diffuser*
- *Power supply included*

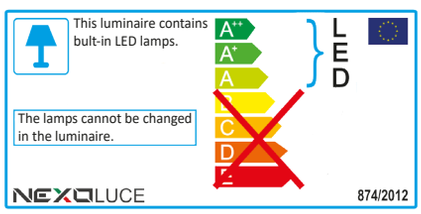





Ø 85



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	9W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5308	**.** WITHOUT EM. KIT	**2** IP40	**A** 2700 K	**.09** 9W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			B 3000 K		**BE** 24°	**8** DIMM. 1-10V	**.B** GREY
			C 4000 K		**BD** 38°		**.D** BLACK
					BA 60°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP40, 9W, 60°optic, ON/OFF control, frame white color without emergency kit **5308.2B.09BA1.A**

NOCE 15

CEILING RECESSED

IP40

LED

15W

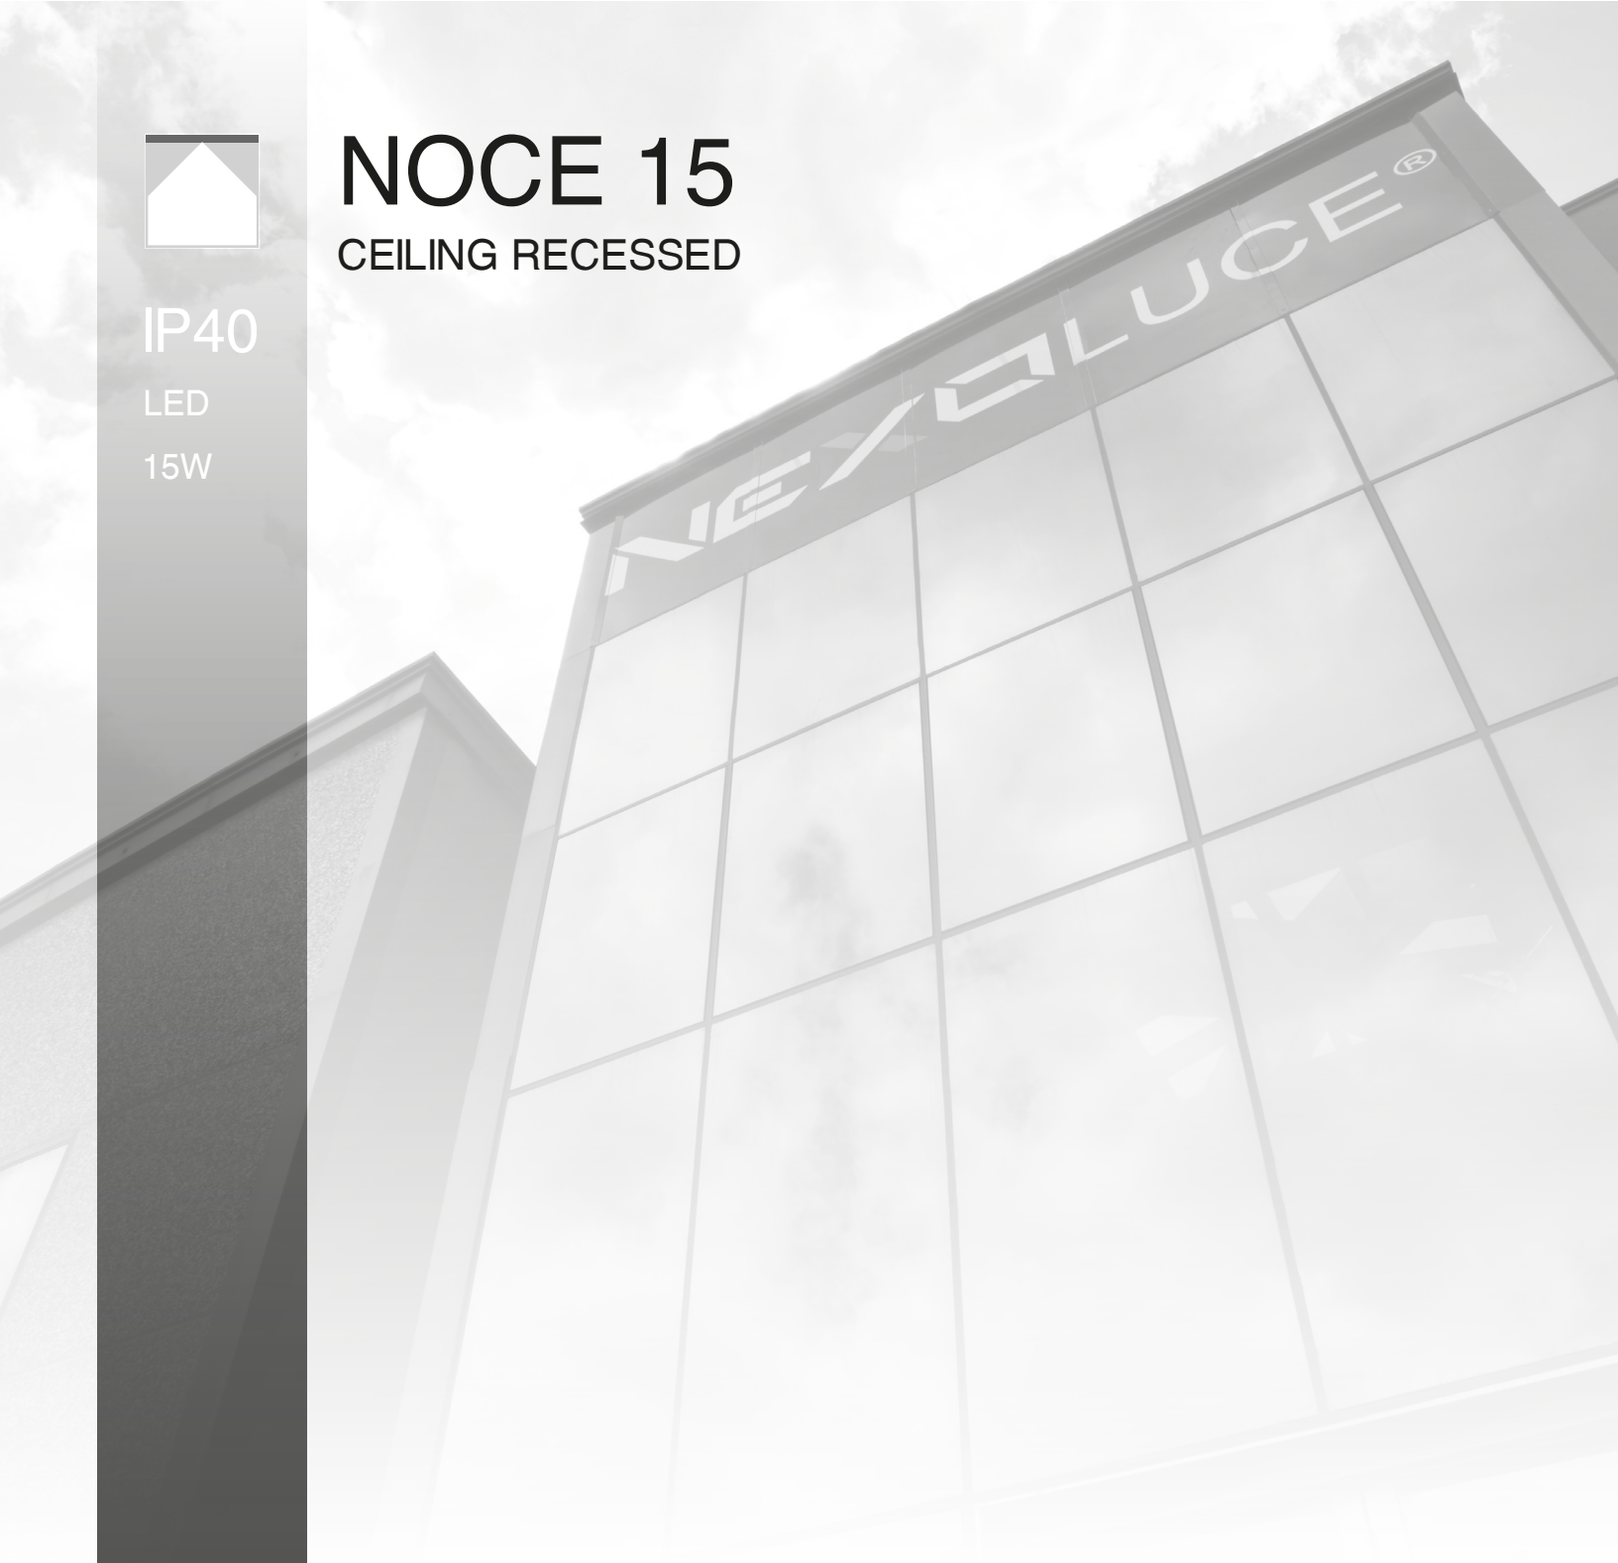

cod. 5327 /// NOCE 15

- *Recessed trimless circular downlight*
- *Metal body*
- *Transparent glass diffuser*
- *Power supply included*

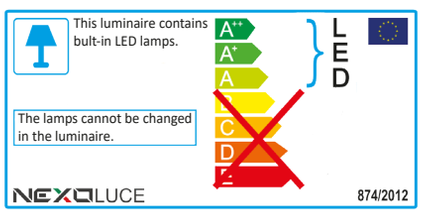





Ø 85



IP40 Kg 0.50

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5327	**.** WITHOUT EM. KIT	**2** IP40	**A** 2700 K	**.15** 15W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			B 3000 K		**BE** 24°	**8** DIMM. 1-10V	**.B** GREY
			C 4000 K		**BD** 38°		**.D** BLACK
					BA 60°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP40, 15W, 60° optic, ON/OFF control, frame white color without emergency kit **5327.2B.15BA1.A**

NOCE Q 5

CEILING RECESSED

IP40

LED

5W

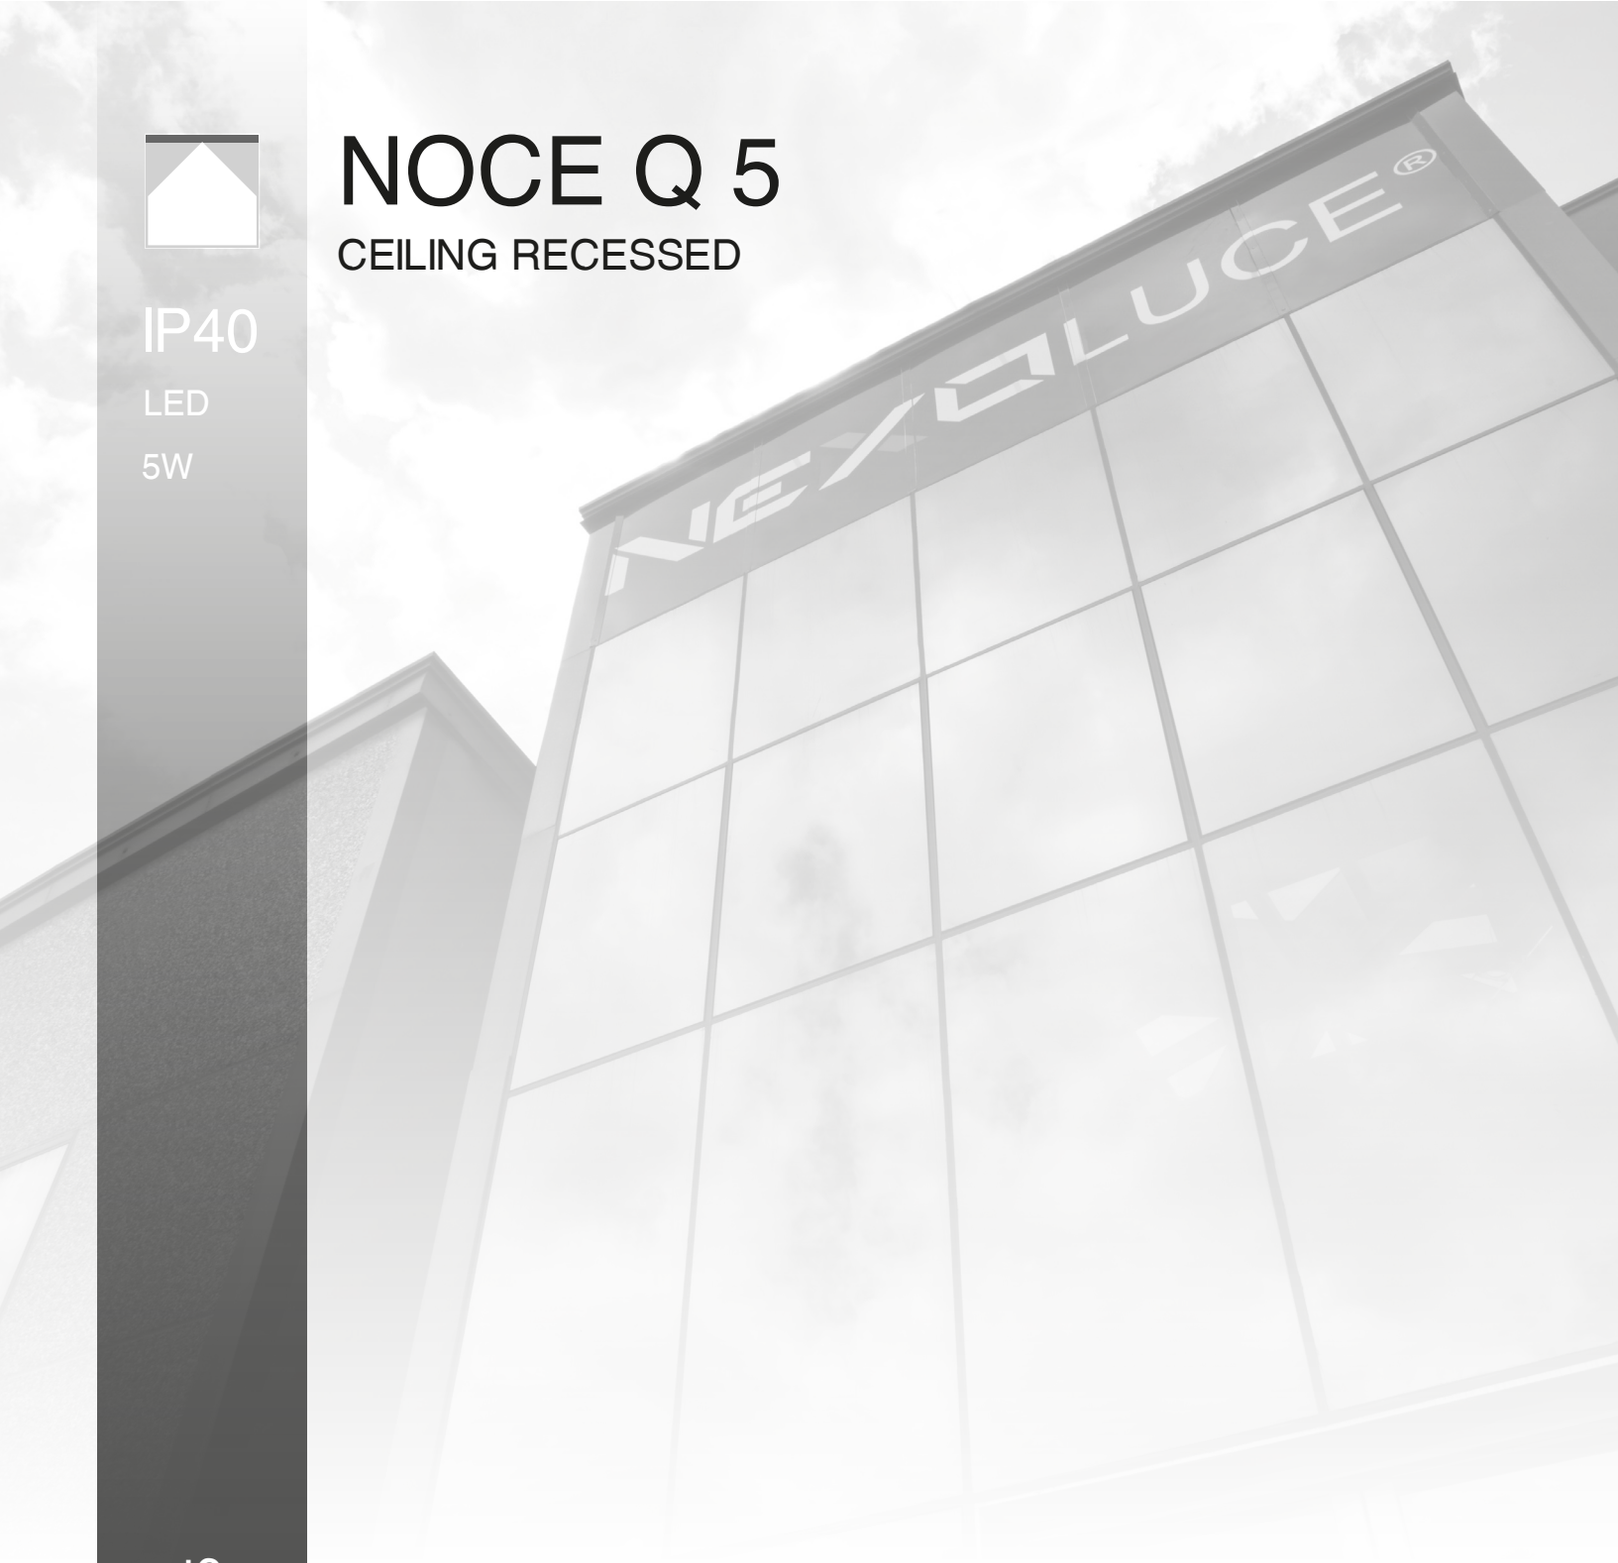

cod. 5329 /// NOCE Q 5

cod. 5329 /// NOCE Q 5

- *Recessed trimless square downlight*
- *Metal body*
- *Transparent glass diffuser*
- *Power supply included*

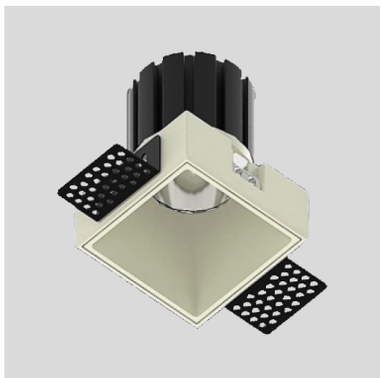

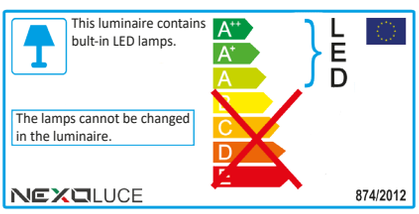

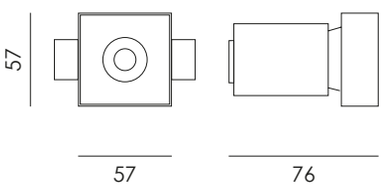



60 x 60



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5329	**.** WITHOUT EM. KIT	**2** IP40	**A** 2700 K	**.05** 5W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			B 3000 K		**BE** 24°	**8** DIMM. 1-10V	**.B** GREY
			C 4000 K		**BD** 38°		**.D** BLACK
					BA 60°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP40, 5W, 15° optic, ON/OFF control, frame white color without emergency kit **5329.2B.05BC1.A**

NOCE Q 9

CEILING RECESSED

IP40

LED

9W

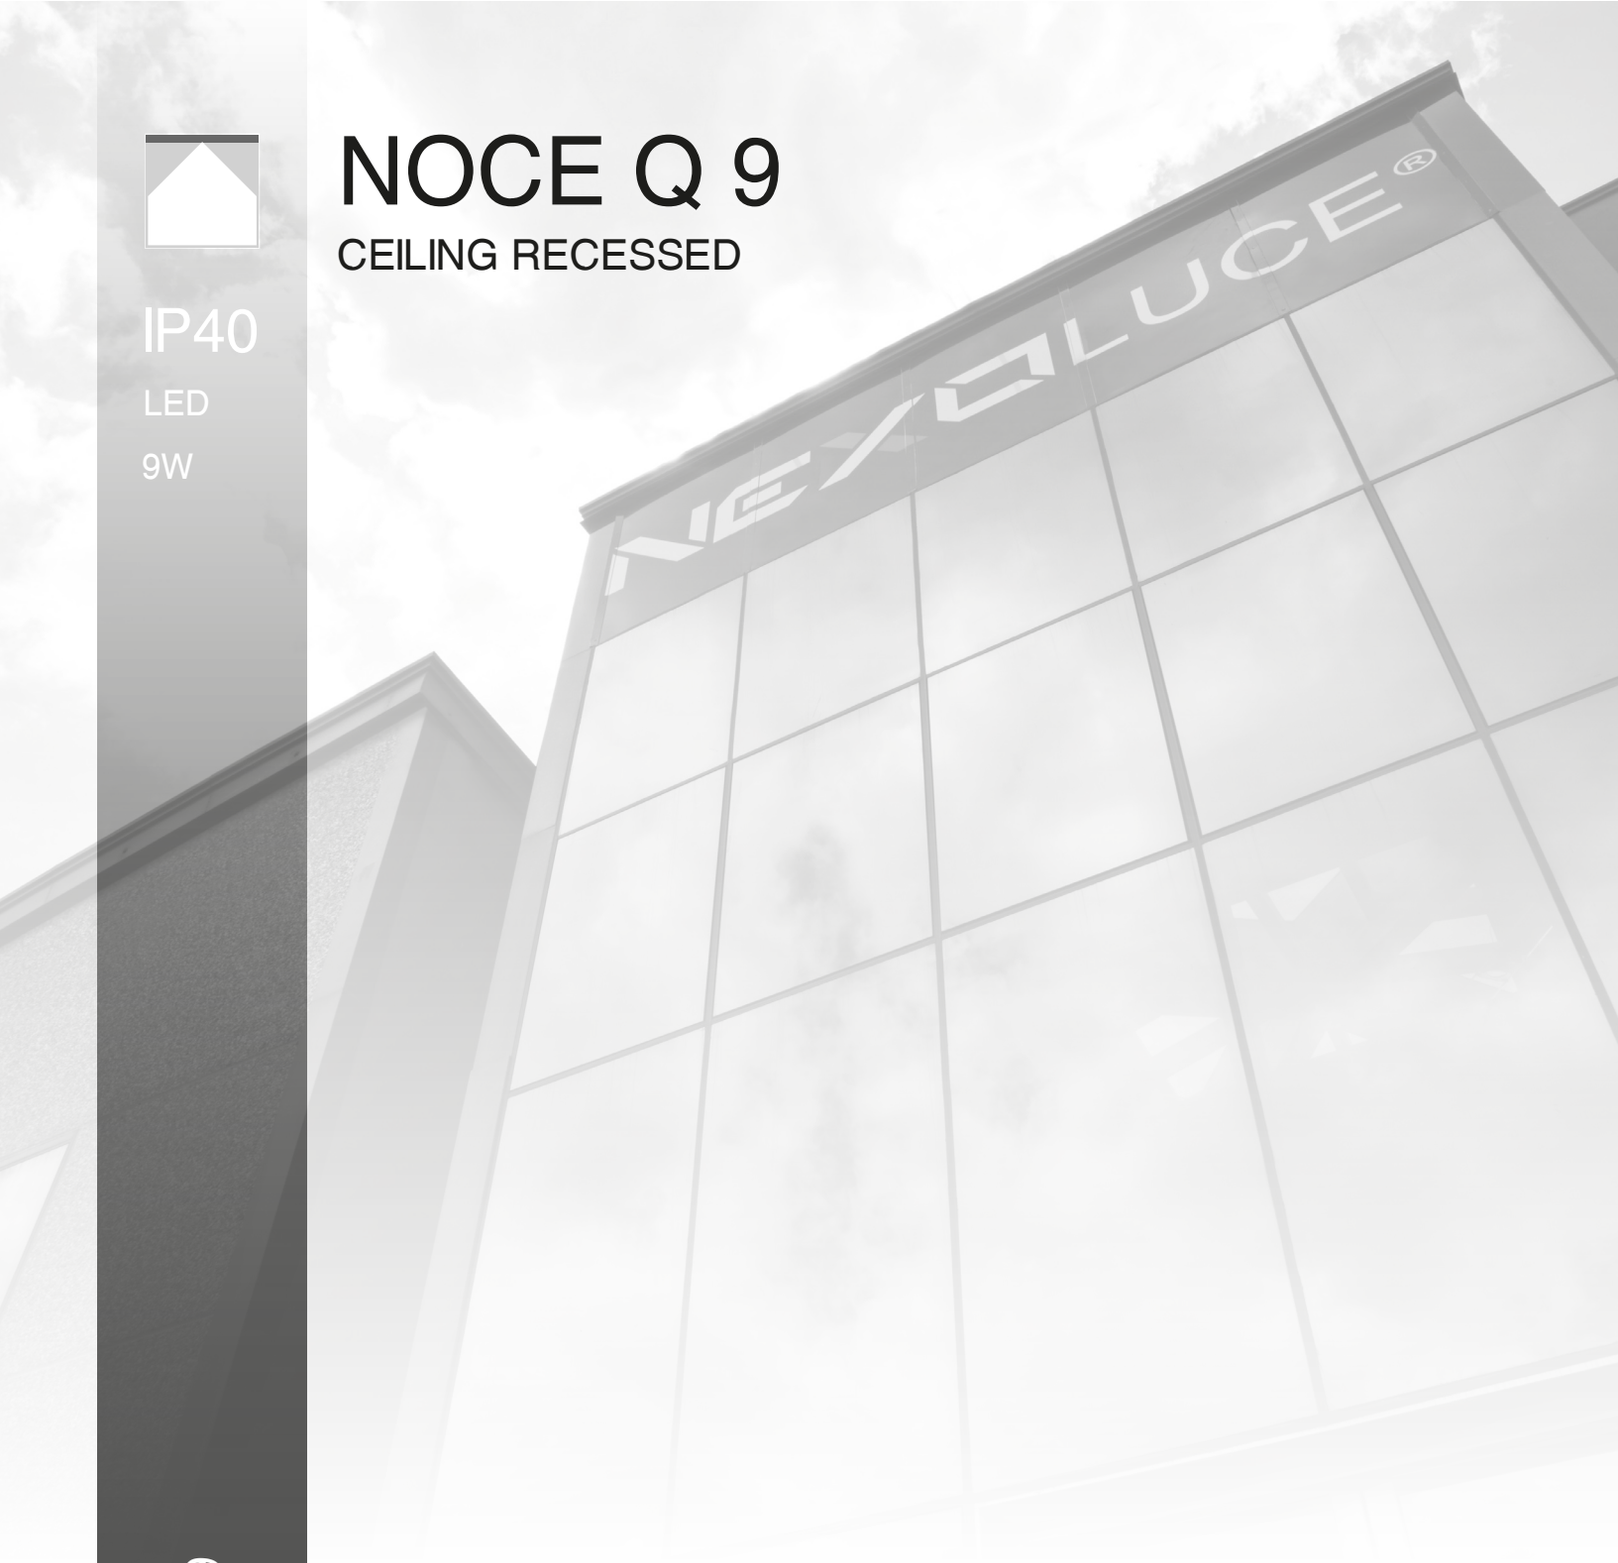

cod. 5330 /// NOCE Q 9

cod. 5330 /// NOCE Q 9

- *Recessed trimless square downlight*
- *Metal body*
- *Transparent glass diffuser*
- *Power supply included*

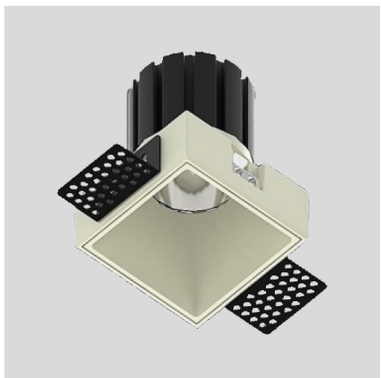

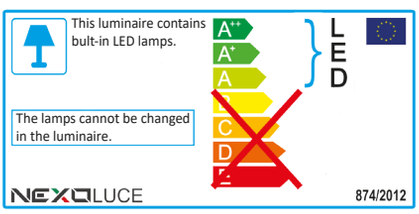



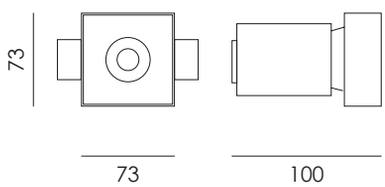

75 x 75



IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	9 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5330	**.** WITHOUT EM. KIT	**2** IP40	**A** 2700 K	**.09** 9W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			B 3000 K		**BE** 24°	**8** DIMM. 1-10V	**.B** GREY
			C 4000 K		**BD** 38°		**.D** BLACK
					BA 60°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP40, 9W, 15° optic, ON/OFF control, frame white color without emergency kit **5330.2B.09BC1.A**

NOCE Q 15

CEILING RECESSED

IP40

LED

15W

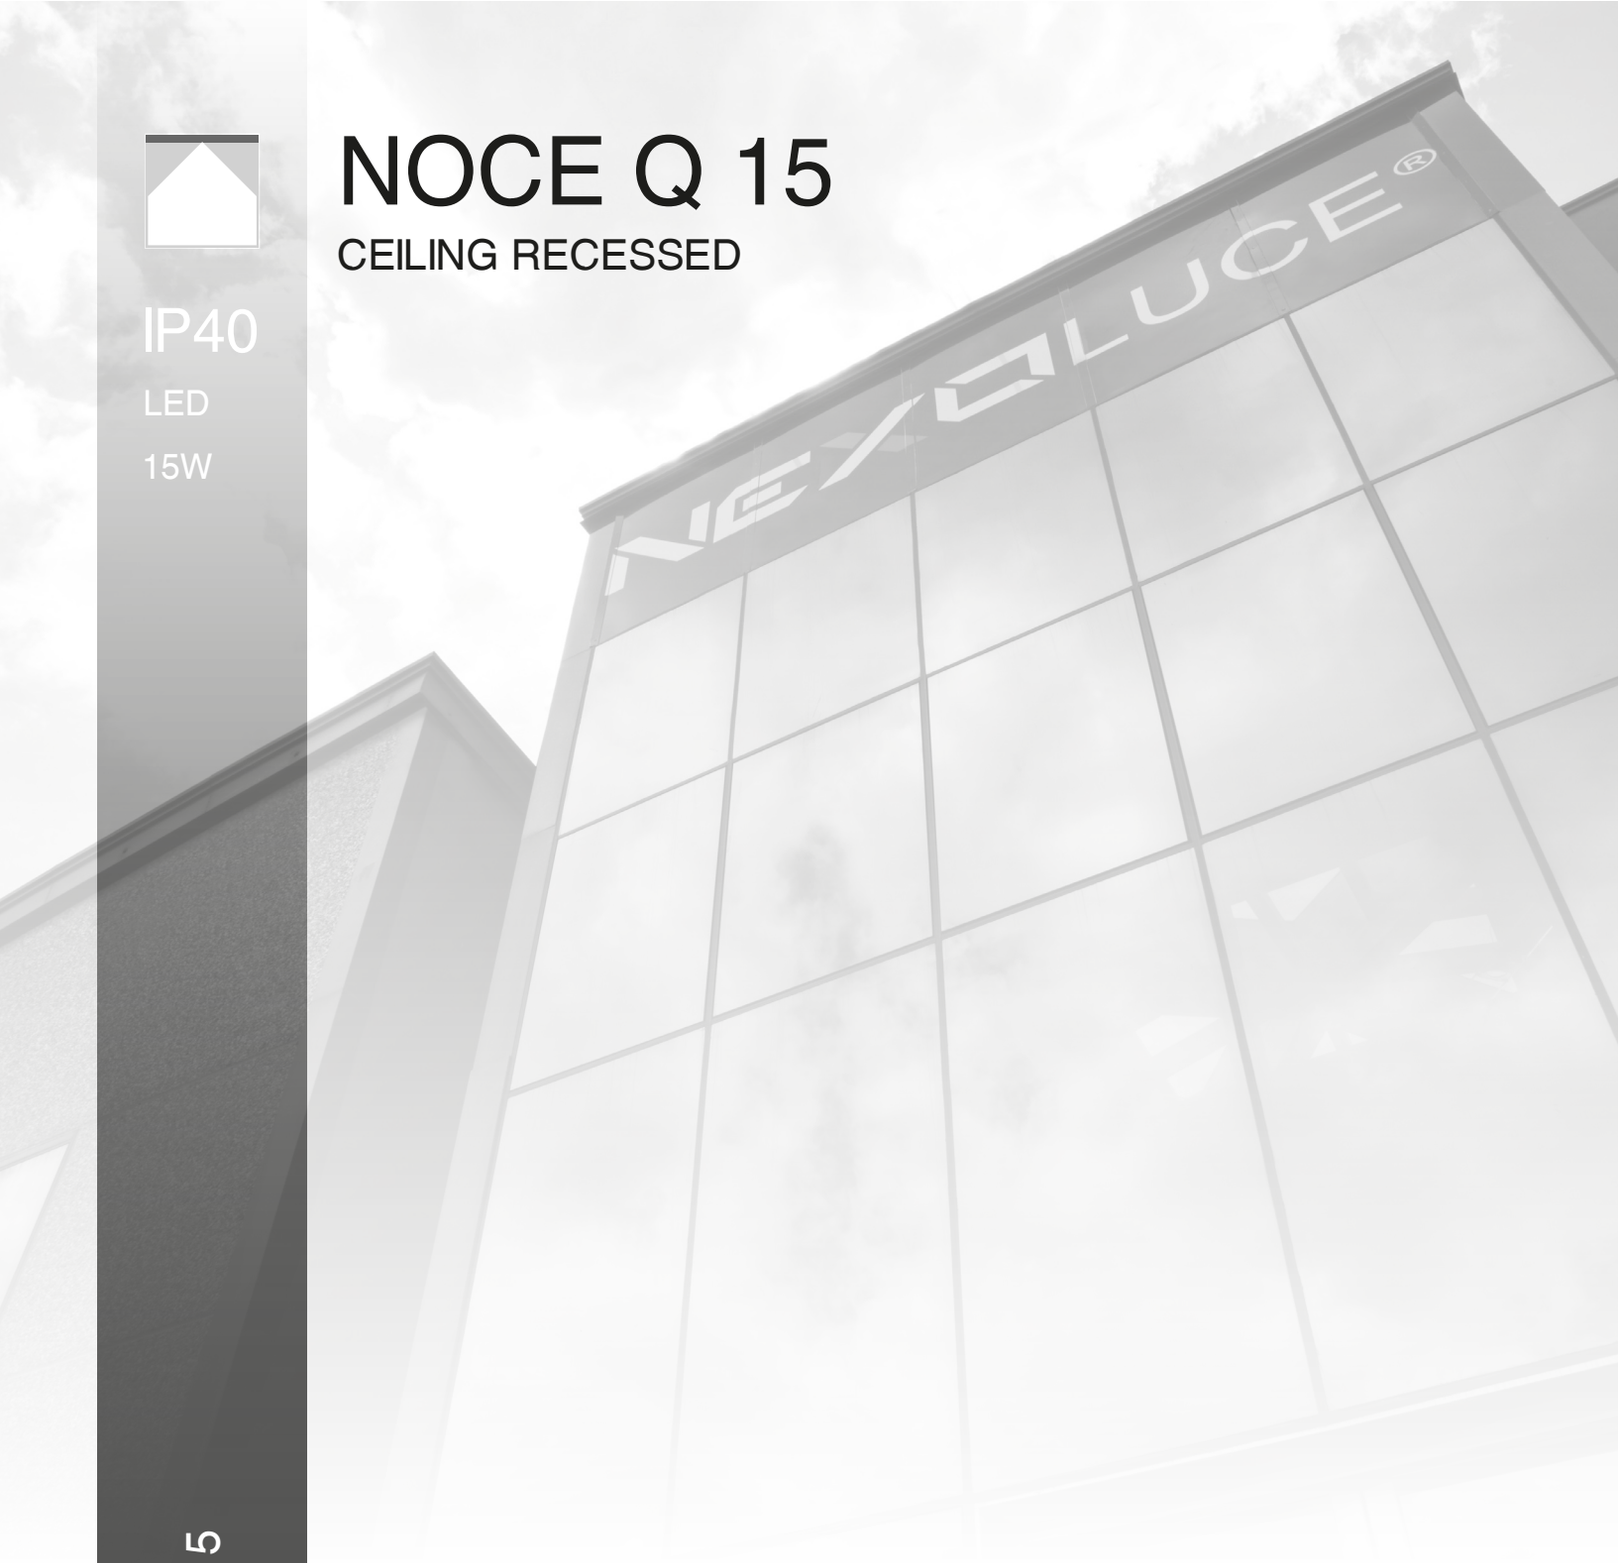

cod. 5331 /// NOCE Q 15

- *Recessed trimless square downlight*
- *Metal body*
- *Transparent glass diffuser*
- *Power supply included*

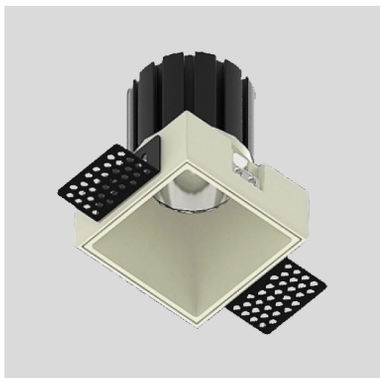

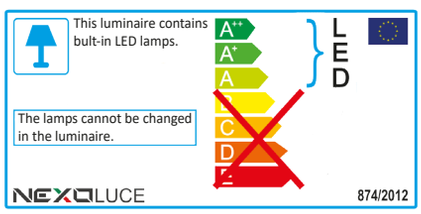

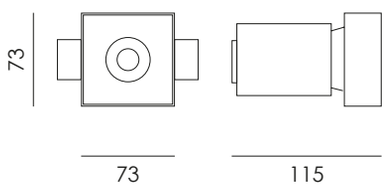

75 x 75





IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5331	**.** WITHOUT EM. KIT	**2** IP40	**A** 2700 K	**.15** 15 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			B 3000 K		**BE** 24°	**8** DIMM. 1-10V	**.B** GREY
			C 4000 K		**BD** 38°		**.D** BLACK
					BA 60°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP40, 15W, 15° optic, ON/OFF control, frame white color without emergency kit **5331.2B.15BC1.A**

CORNICE 1

CEILING RECESSED

IP20

LED

5W

10W

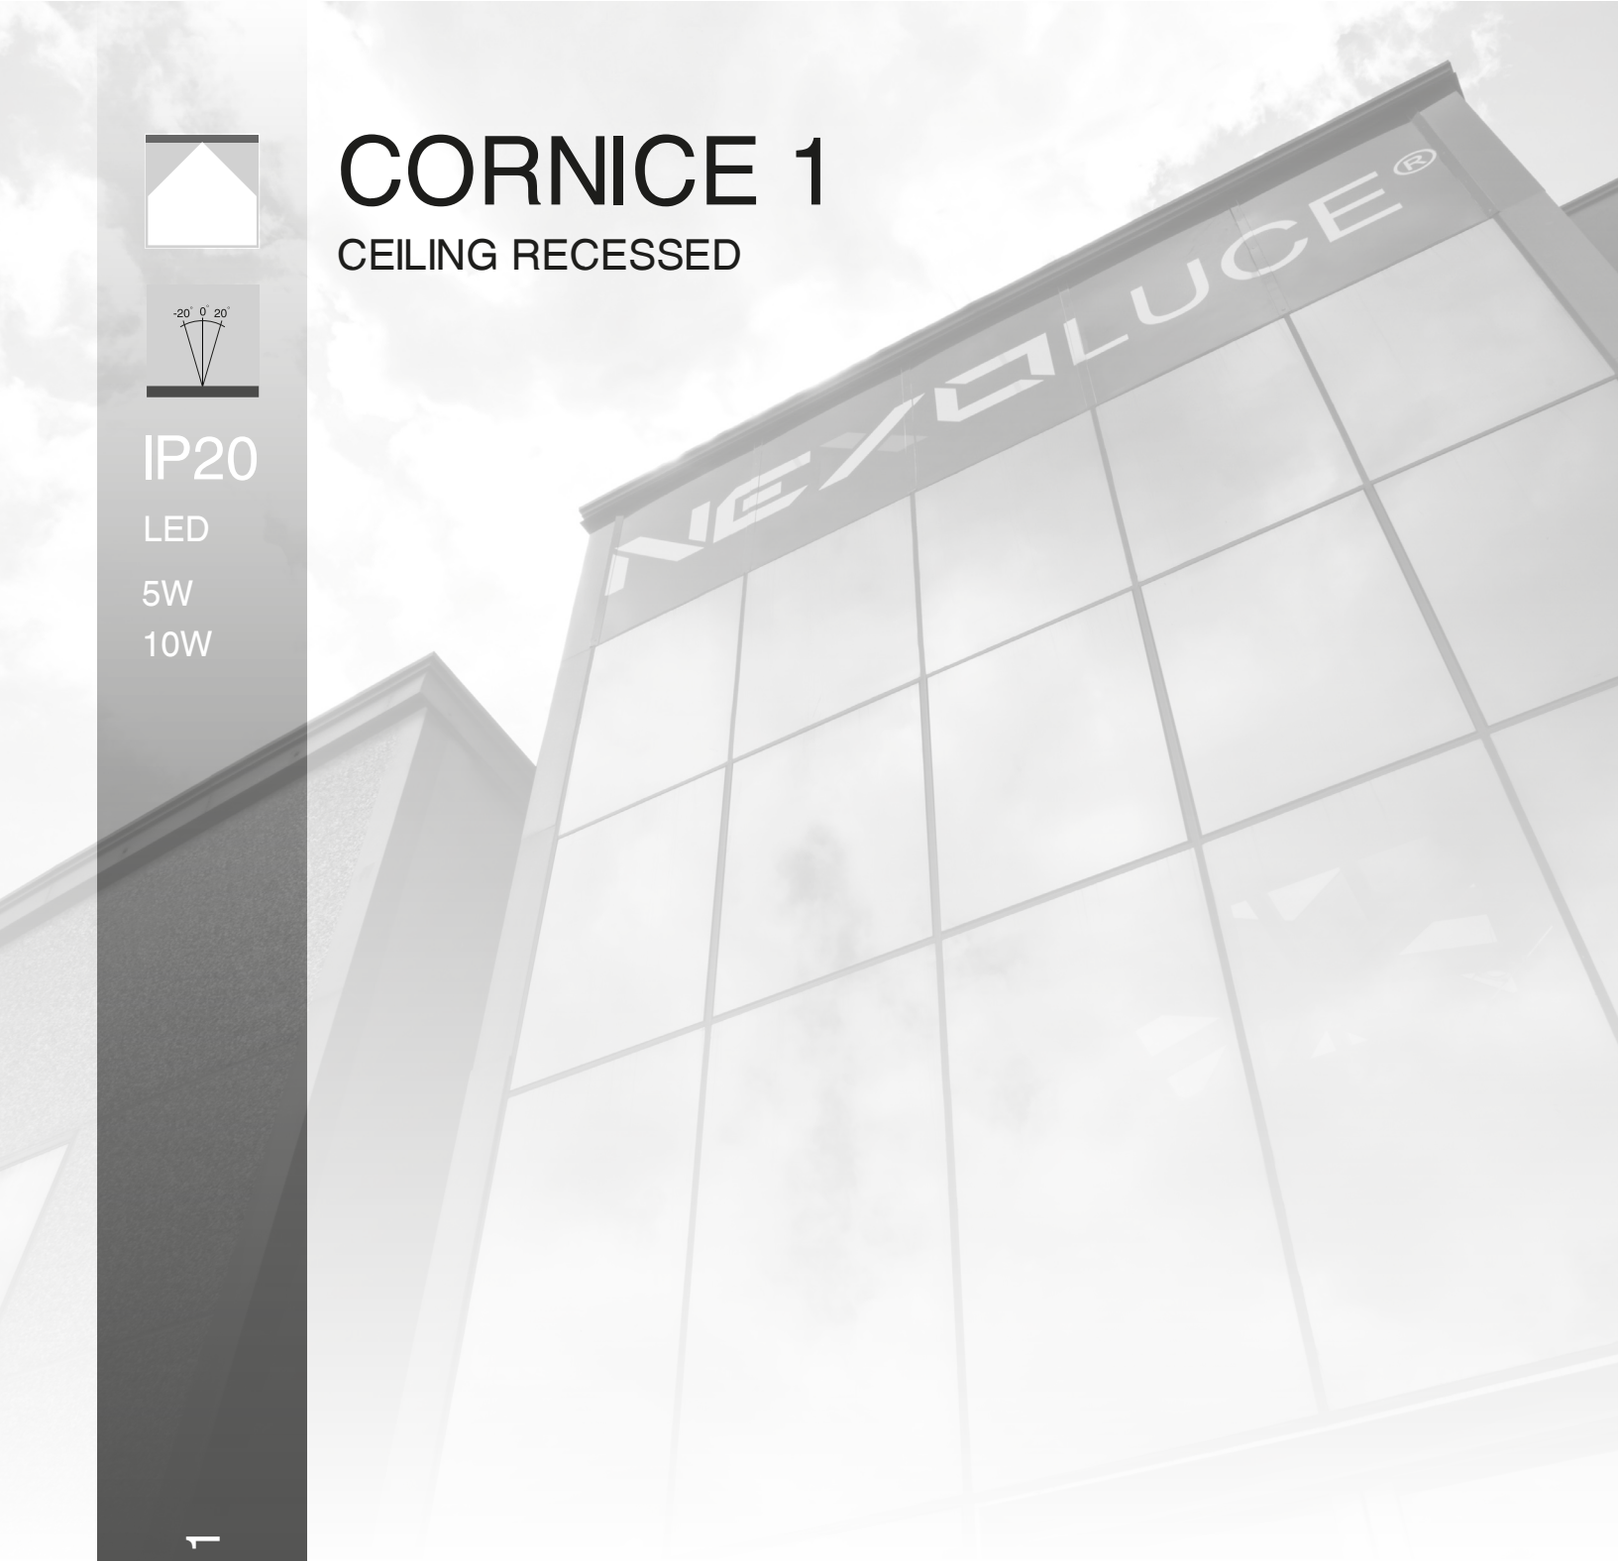

cod. 5233 /// CORNICE 1

- *Recessed downlight*
- *Adjustable beam*
- *Springs for installation*
- *Power supply included*

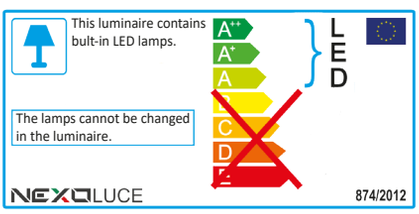



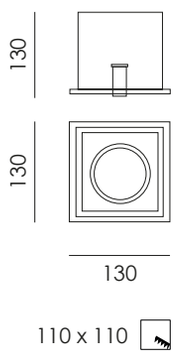

IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 / 10 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5233	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.05** 5 W	**BD** 38°	**1** ON / OFF	**.A** WHITE
			C 4000 K	**.10** 10 W			

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP20, 5W, 38° optic, ON/OFF control, frame white color without emergency kit **5233.1B.05BD1.A**

CORNICE 2

CEILING RECESSED

IP20

LED

10W

20W

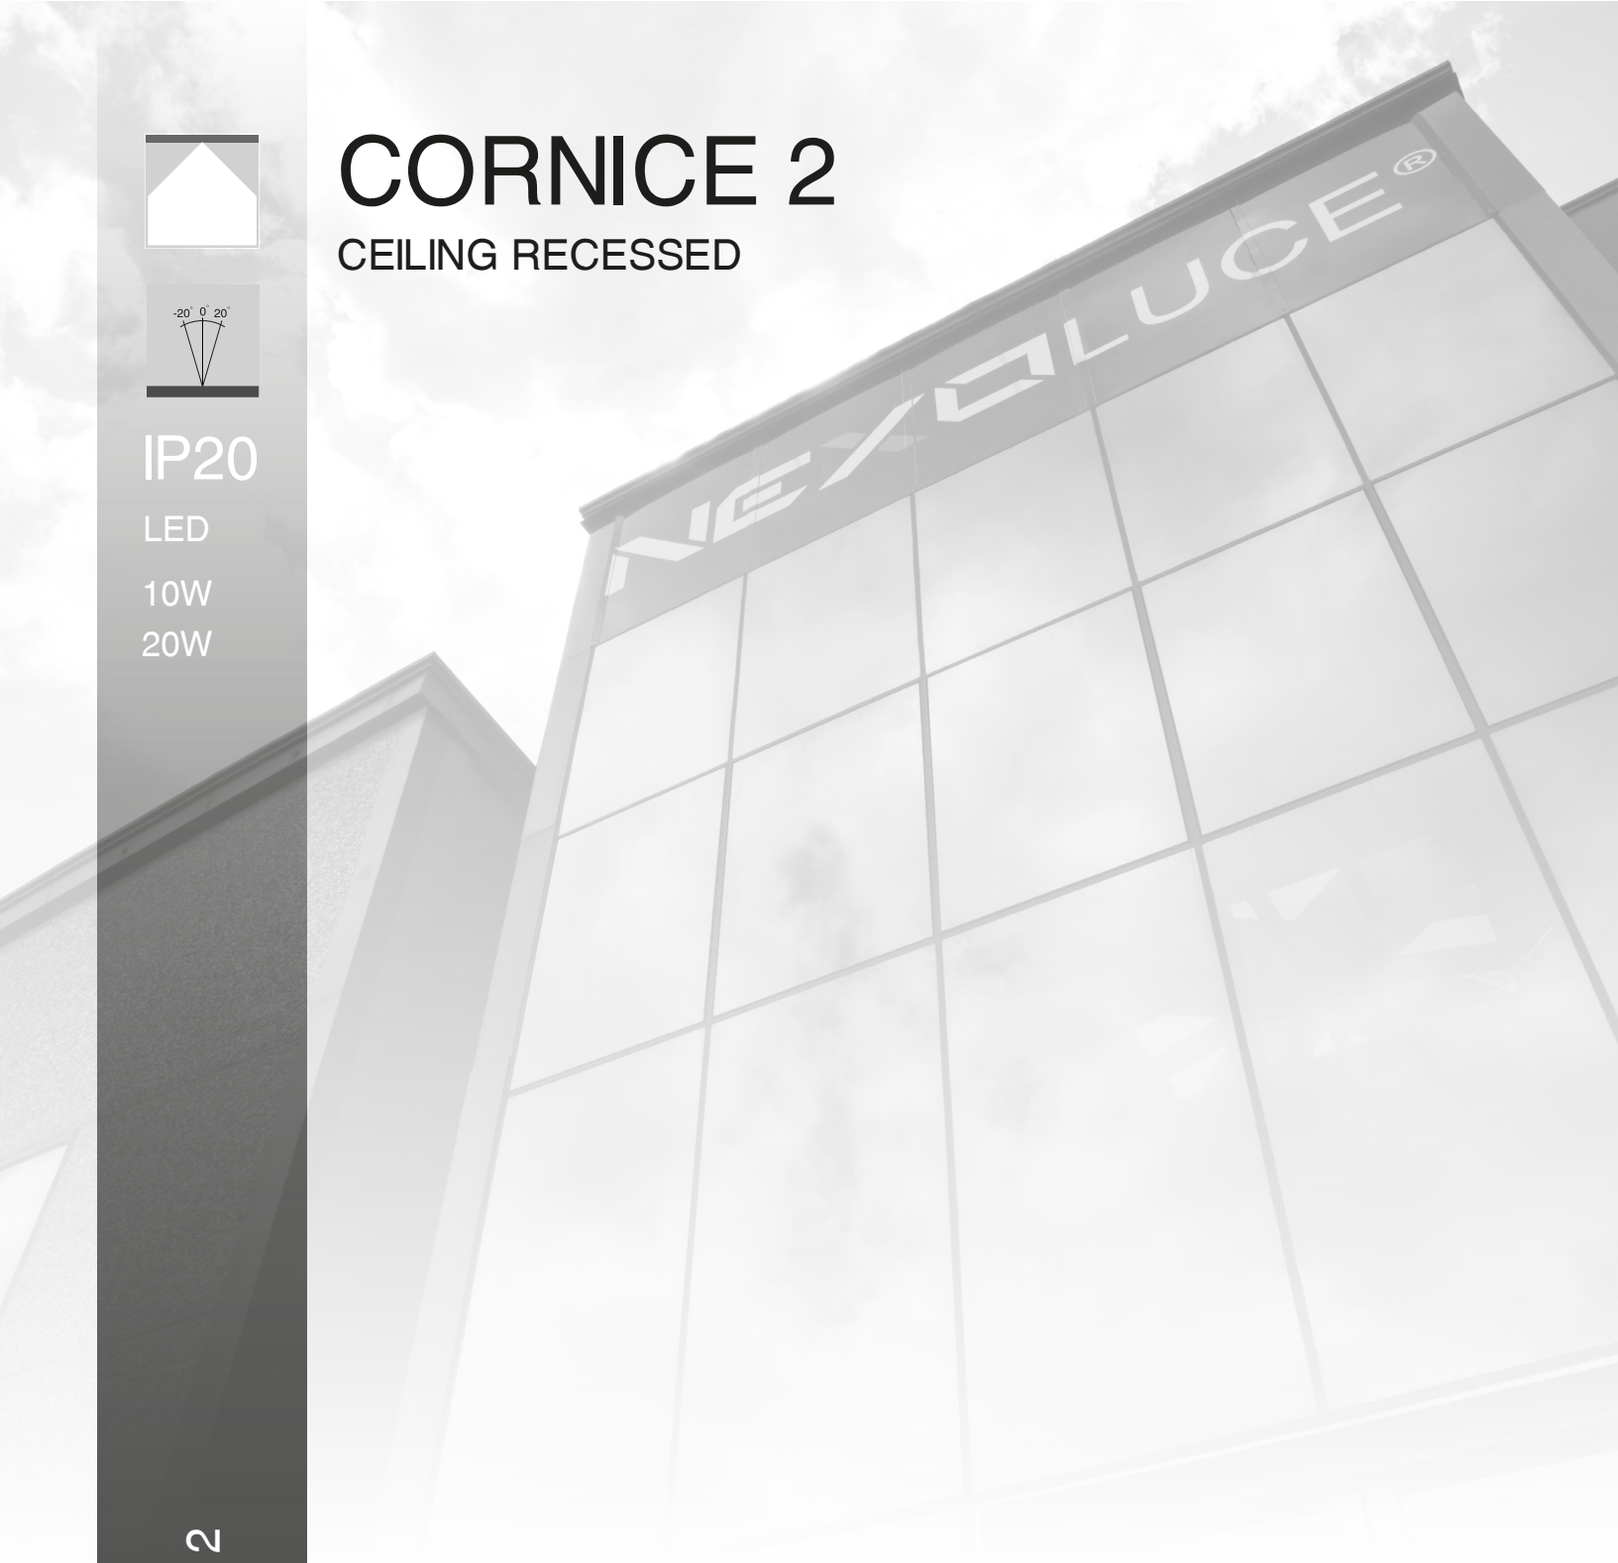

cod. 5218 /// CORNICE 2

- *Recessed downlight*
- *Adjustable beam*
- *Springs for installation*
- *Power supply included*

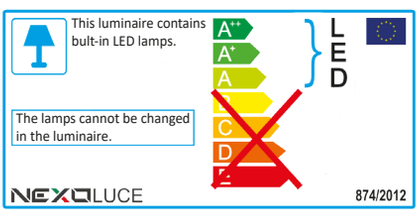

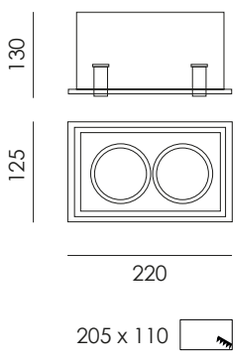



IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	10 / 20 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5218	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.10** 2 x 5 W	**BD** 38°	**1** ON / OFF	**.A** WHITE
			C 4000 K	**.20** 2 x 10 W			

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP20, 2x5W, 38° optic, ON/OFF control, frame white color without emergency kit **5218.1B.10BD1.A**

CORNICE 3

CEILING RECESSED

IP20

LED

15W

30W

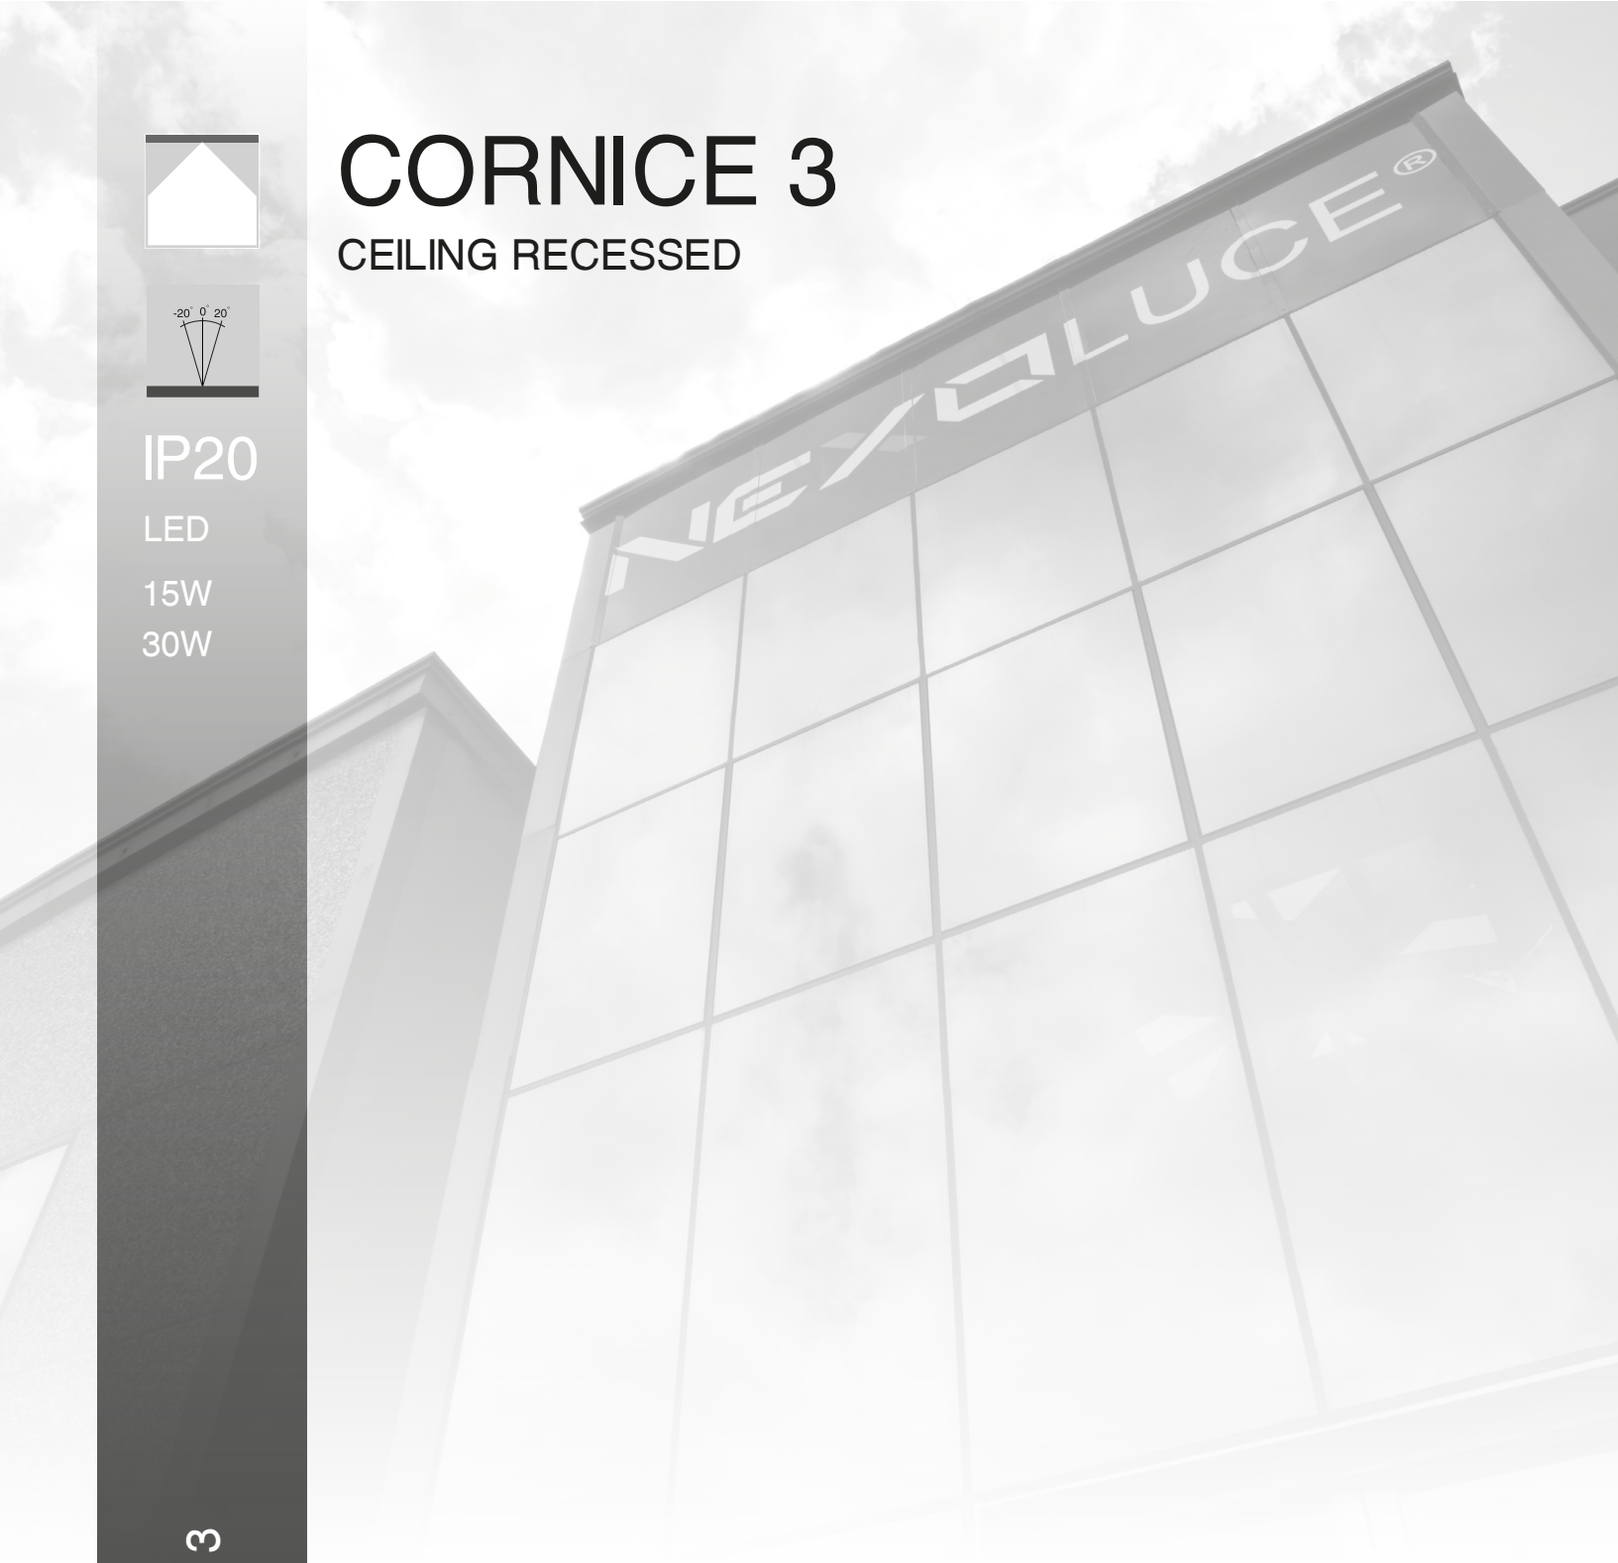

cod. 5219 /// CORNICE 3

- *Recessed downlight*
- *Adjustable beam*
- *Springs for installation*
- *Power supply included*

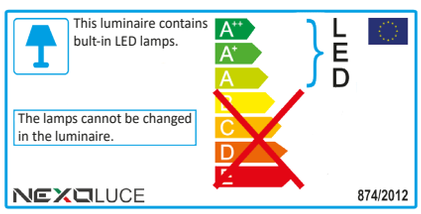





IP20 Kg 1.50

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 / 30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5219	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.15** 3 x 5 W	**BD** 38°	**1** ON / OFF	**.A** WHITE
			C 4000 K	**.30** 3 x 10 W			

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP20, 3x5W, 38° optic, ON/OFF control, frame white color without emergency kit **5219.1B.15BD1.A**

OCCHIO 5

CEILING RECESSED

IP44

LED

5W

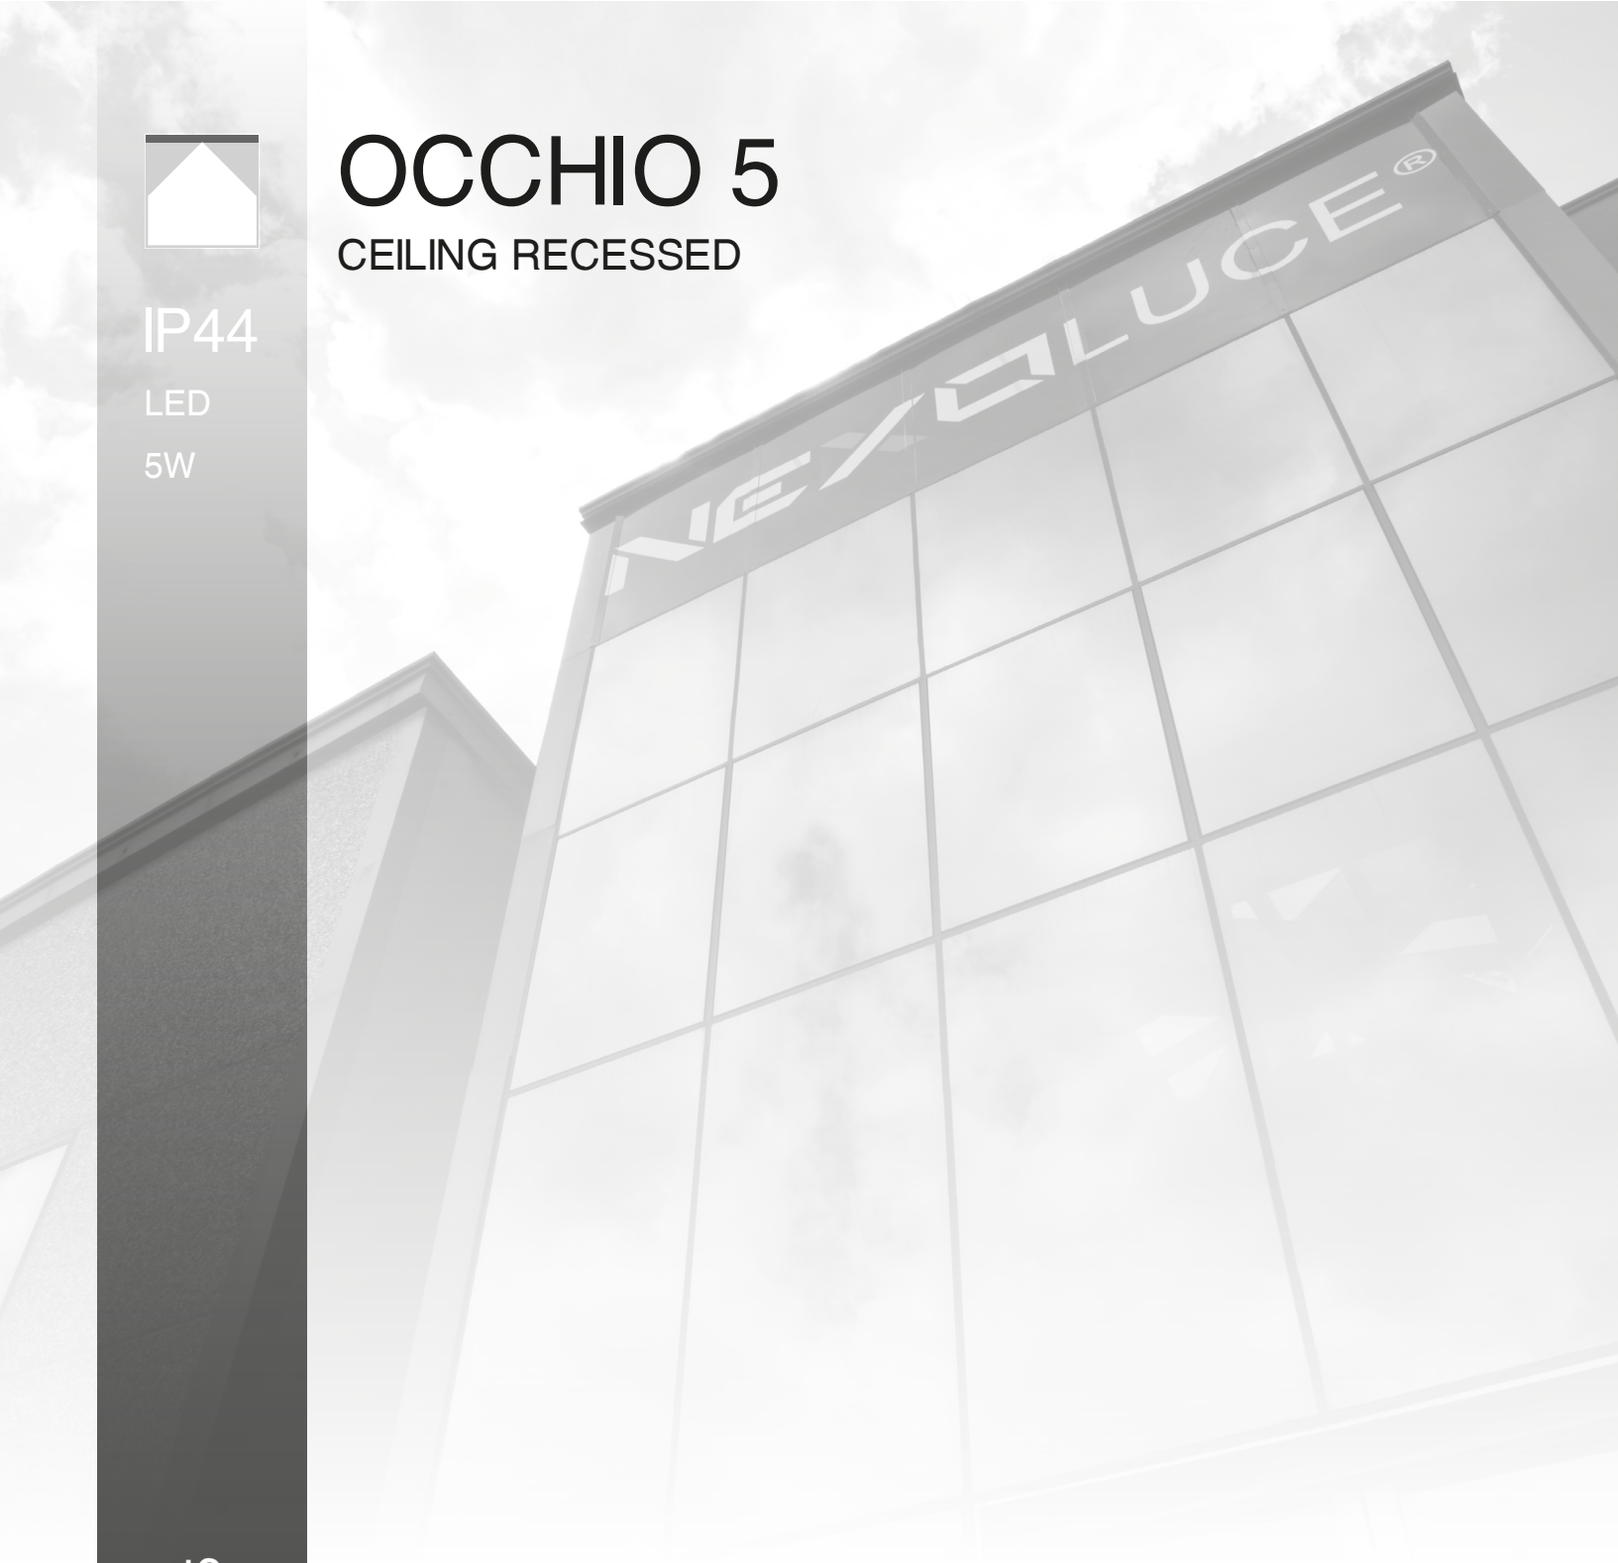

cod. 5310 /// OCCHIO 5

- *Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Polyester powder coated*
- *Clear polycarbonate diffuser*
- *Aluminium mirror reflector*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

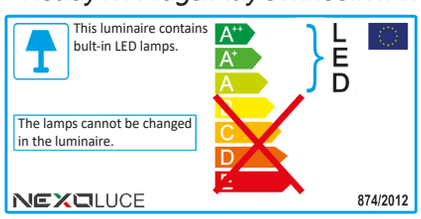





Ø 75

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

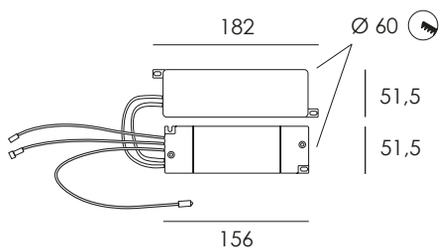

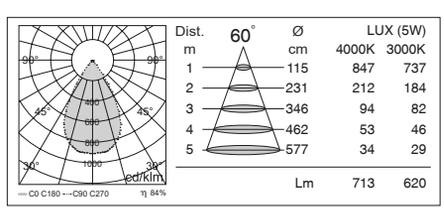

IP44 Front IP20 Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5310	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.05** 5 W	**BA** 60°	**1** ON / OFF	**.A** WHITE
			C 4000 K			**7** DIM. DALI	

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP44/IP20, 5W, 60°optic, ON/OFF control, frame white color without emergency kit **5310.9B.05BA1.A**

OCCHIO 10

CEILING RECESSED

IP44

LED

10W

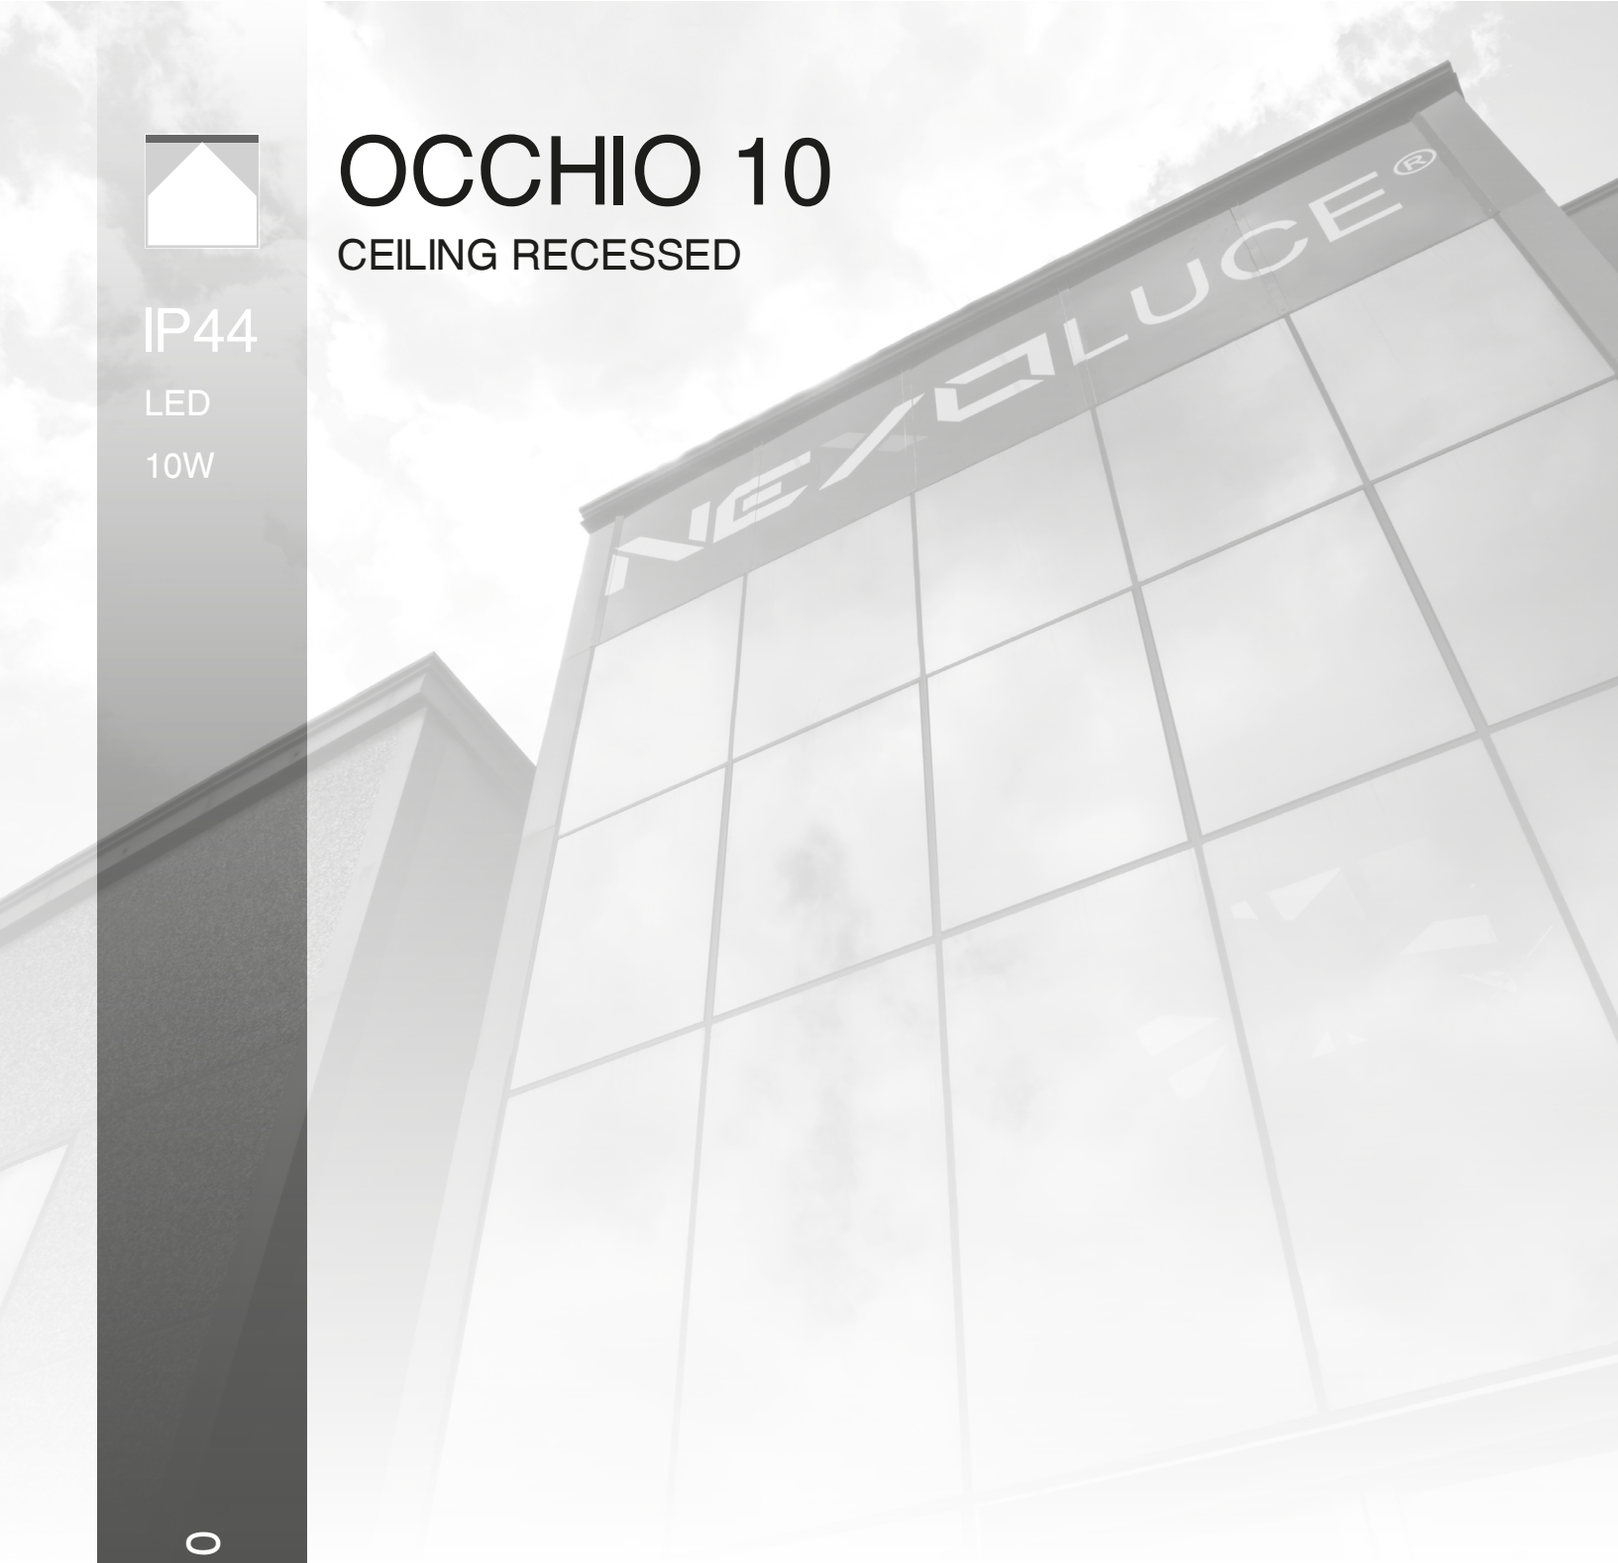

cod. 5312 /// OCCHIO 10

- *Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Polyester powder coated*
- *Clear polycarbonate diffuser*
- *Aluminium mirror reflector*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

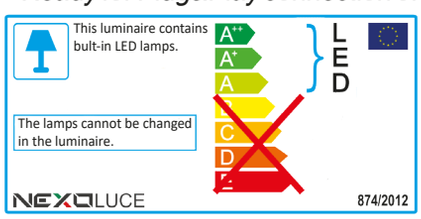





Ø 100

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

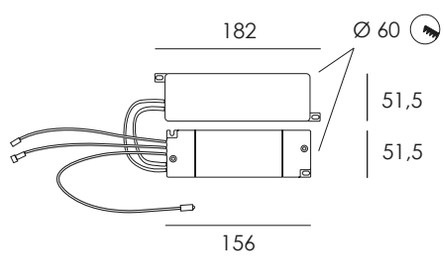

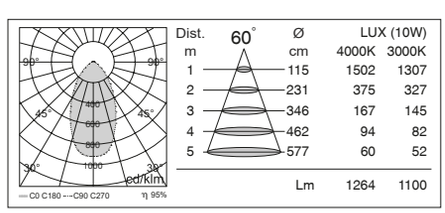

IP44 Front IP20 Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	10 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5312	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.10** 10 W	**.H** 40°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BA** 60°	**7** DIM. DALI	

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP44/IP20, 10W, 60° optic, ON/OFF control, frame white color without emergency kit **5312.9B.10BA1.A**

OCCHIO 15

CEILING RECESSED

IP44

LED

15W

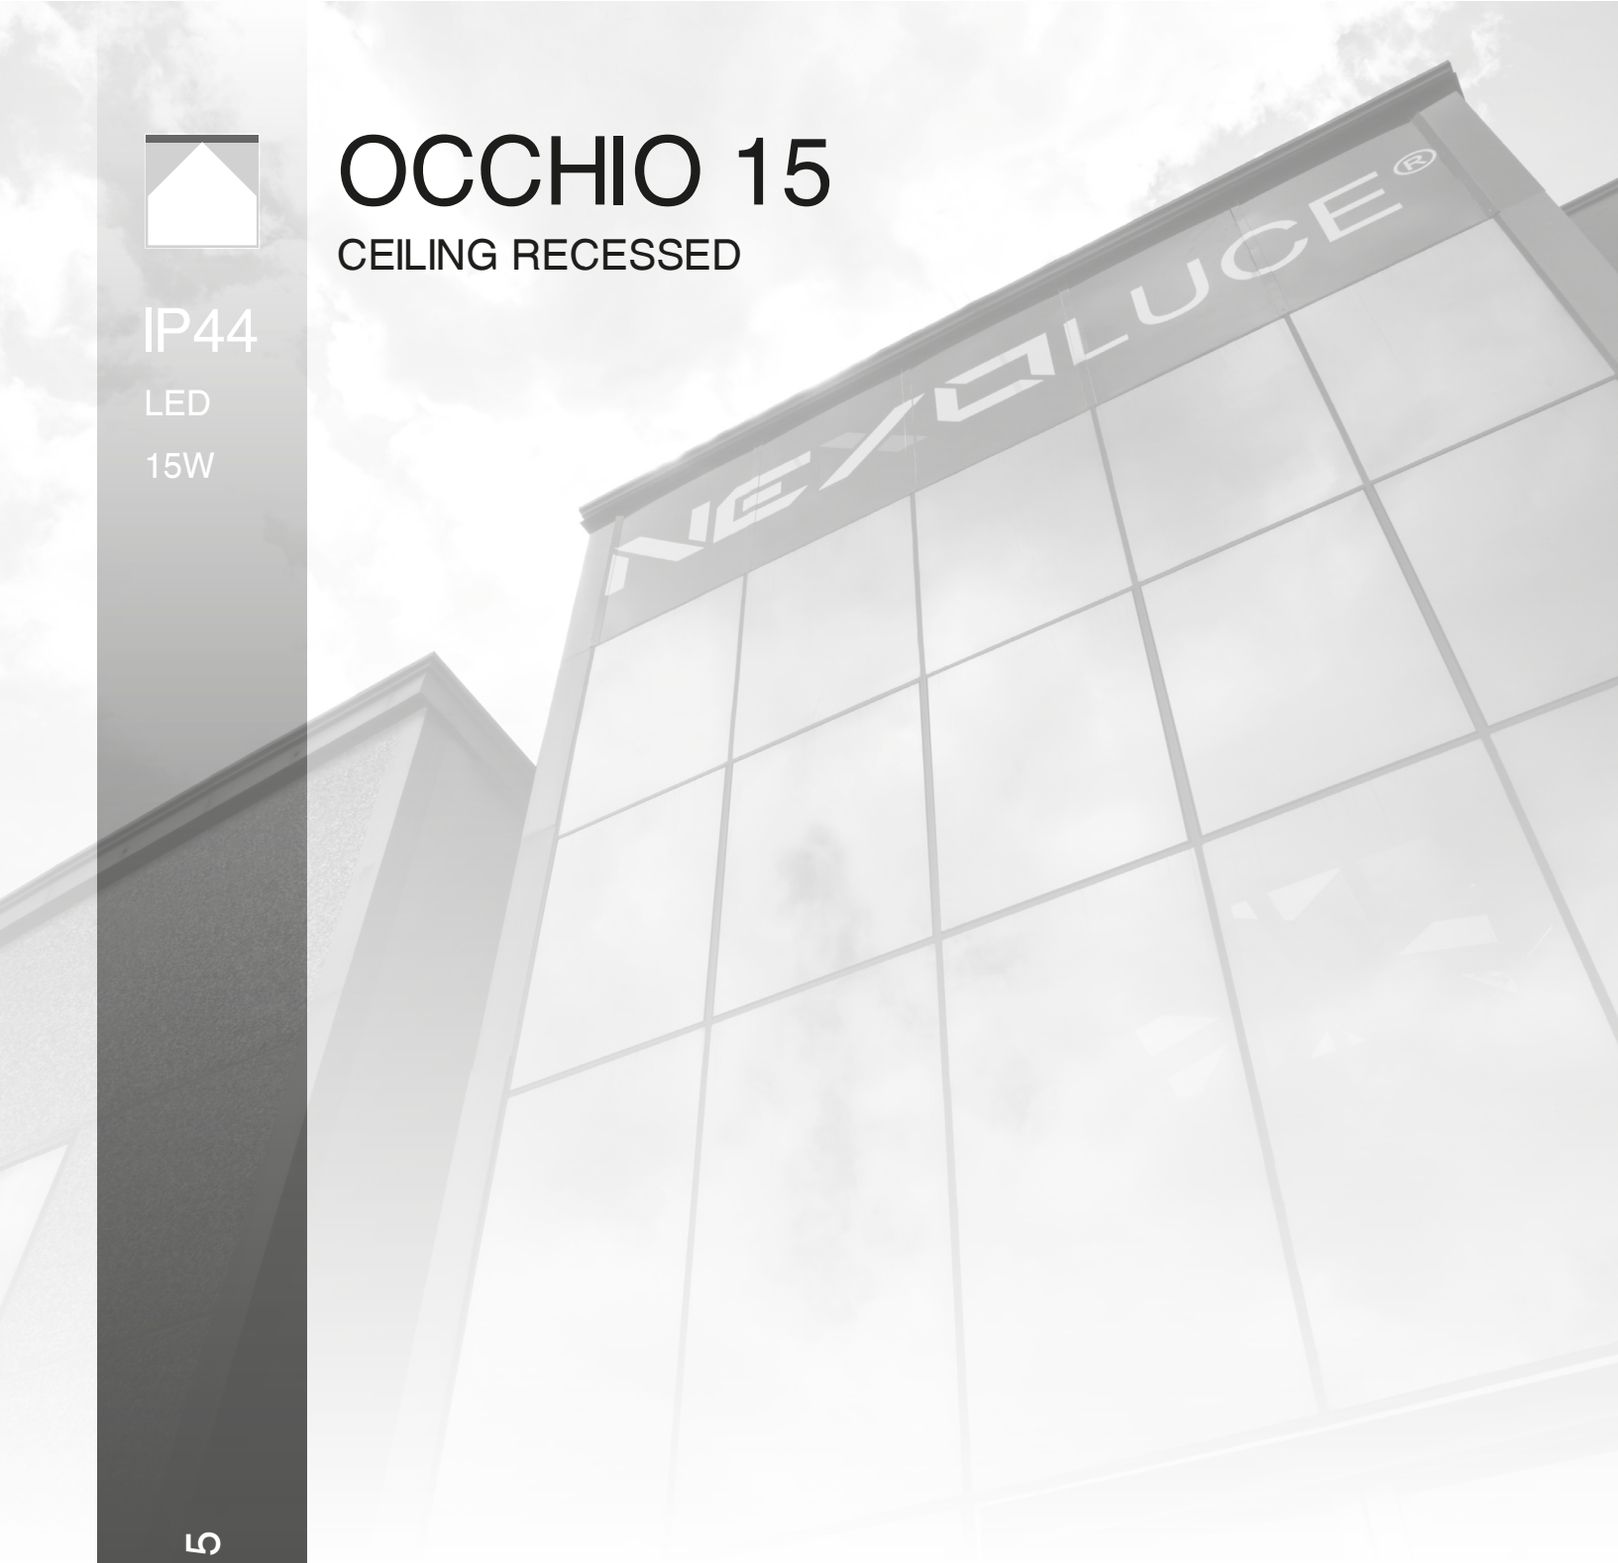

cod. 5314 /// OCCHIO 15

- *Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Polyester powder coated*
- *Clear polycarbonate diffuser*
- *Aluminium mirror reflector*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

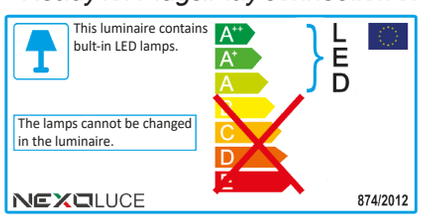





Ø 120

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

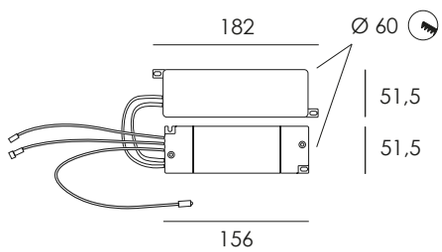

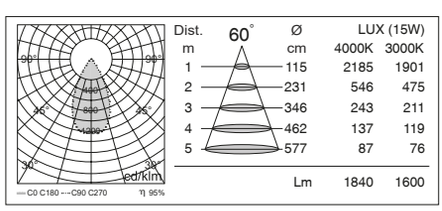

IP44 Front IP20 Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5314	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.15** 15 W	**BA** 60°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**AR** 90°	**7** DIM. DALI	

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP44/IP20, 15W, 60°optic, ON/OFF control, frame white color without emergency kit **5314.9B.15BA1.A**

OCCHIO 20

CEILING RECESSED

IP44

LED

20W

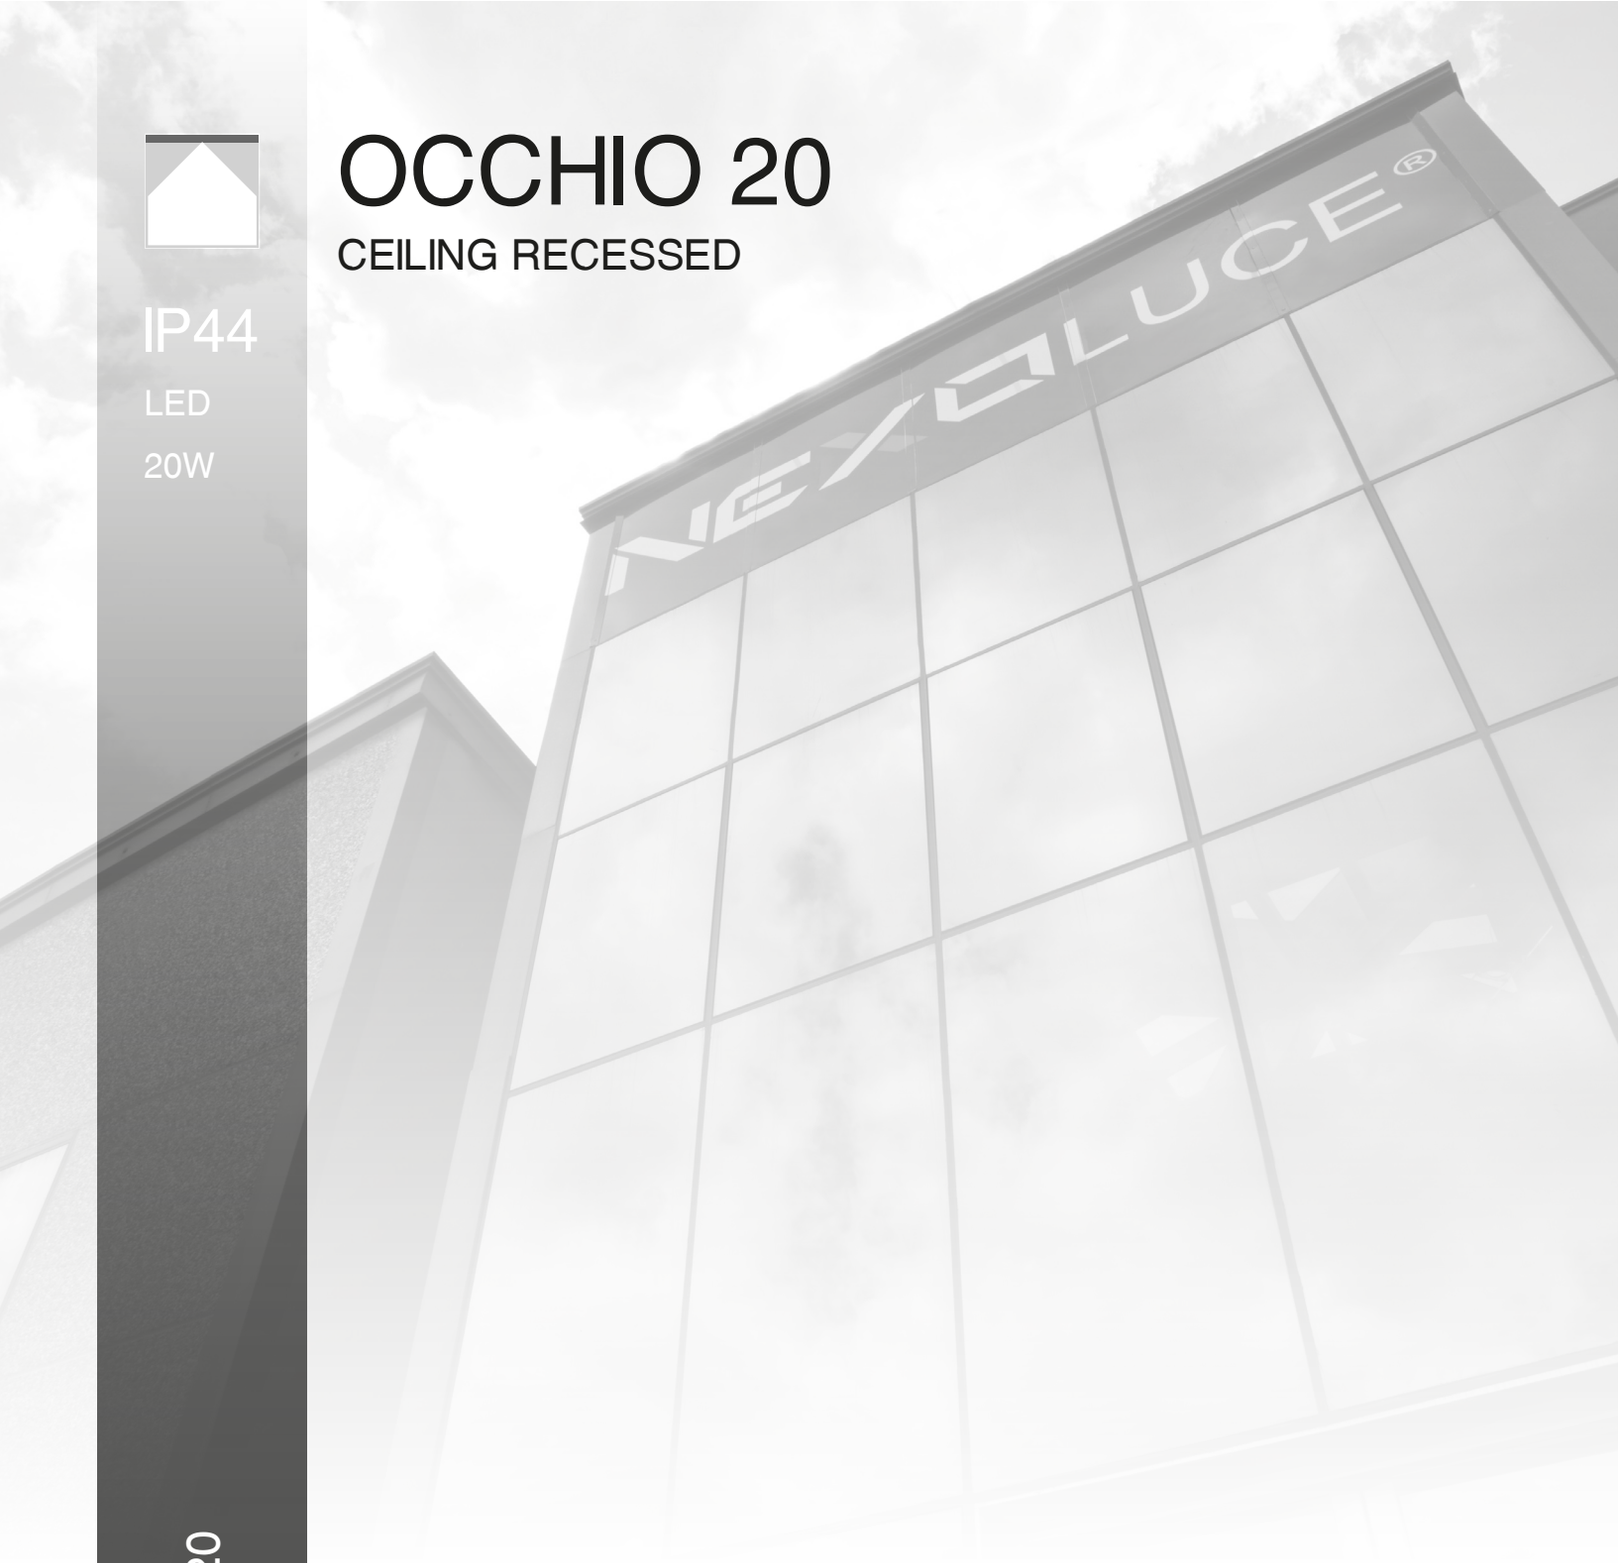

cod. 5315 /// OCCHIO 20

- *Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Polyester powder coated*
- *Clear polycarbonate diffuser*
- *Aluminium mirror reflector*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

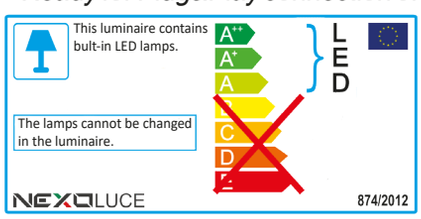





ACCESSORIES

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

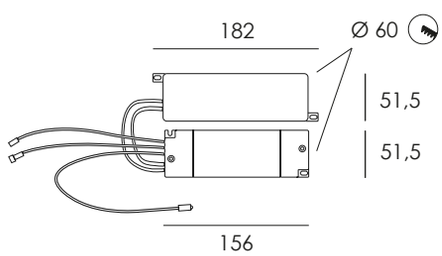

IP44 Front IP20 Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	20 W

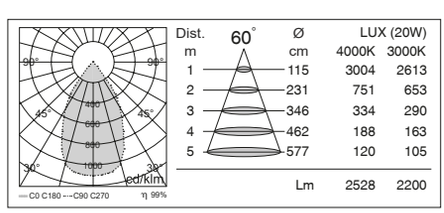

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5315	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.20** 20 W	**BA** 60°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**AR** 90°	**7** DIM. DALI	

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP44/IP20, 20W, 60°optic, ON/OFF control, frame white color without emergency kit **5315.9B.20BA1.A**

OCCHIO 24

CEILING RECESSED

IP44

LED

24W

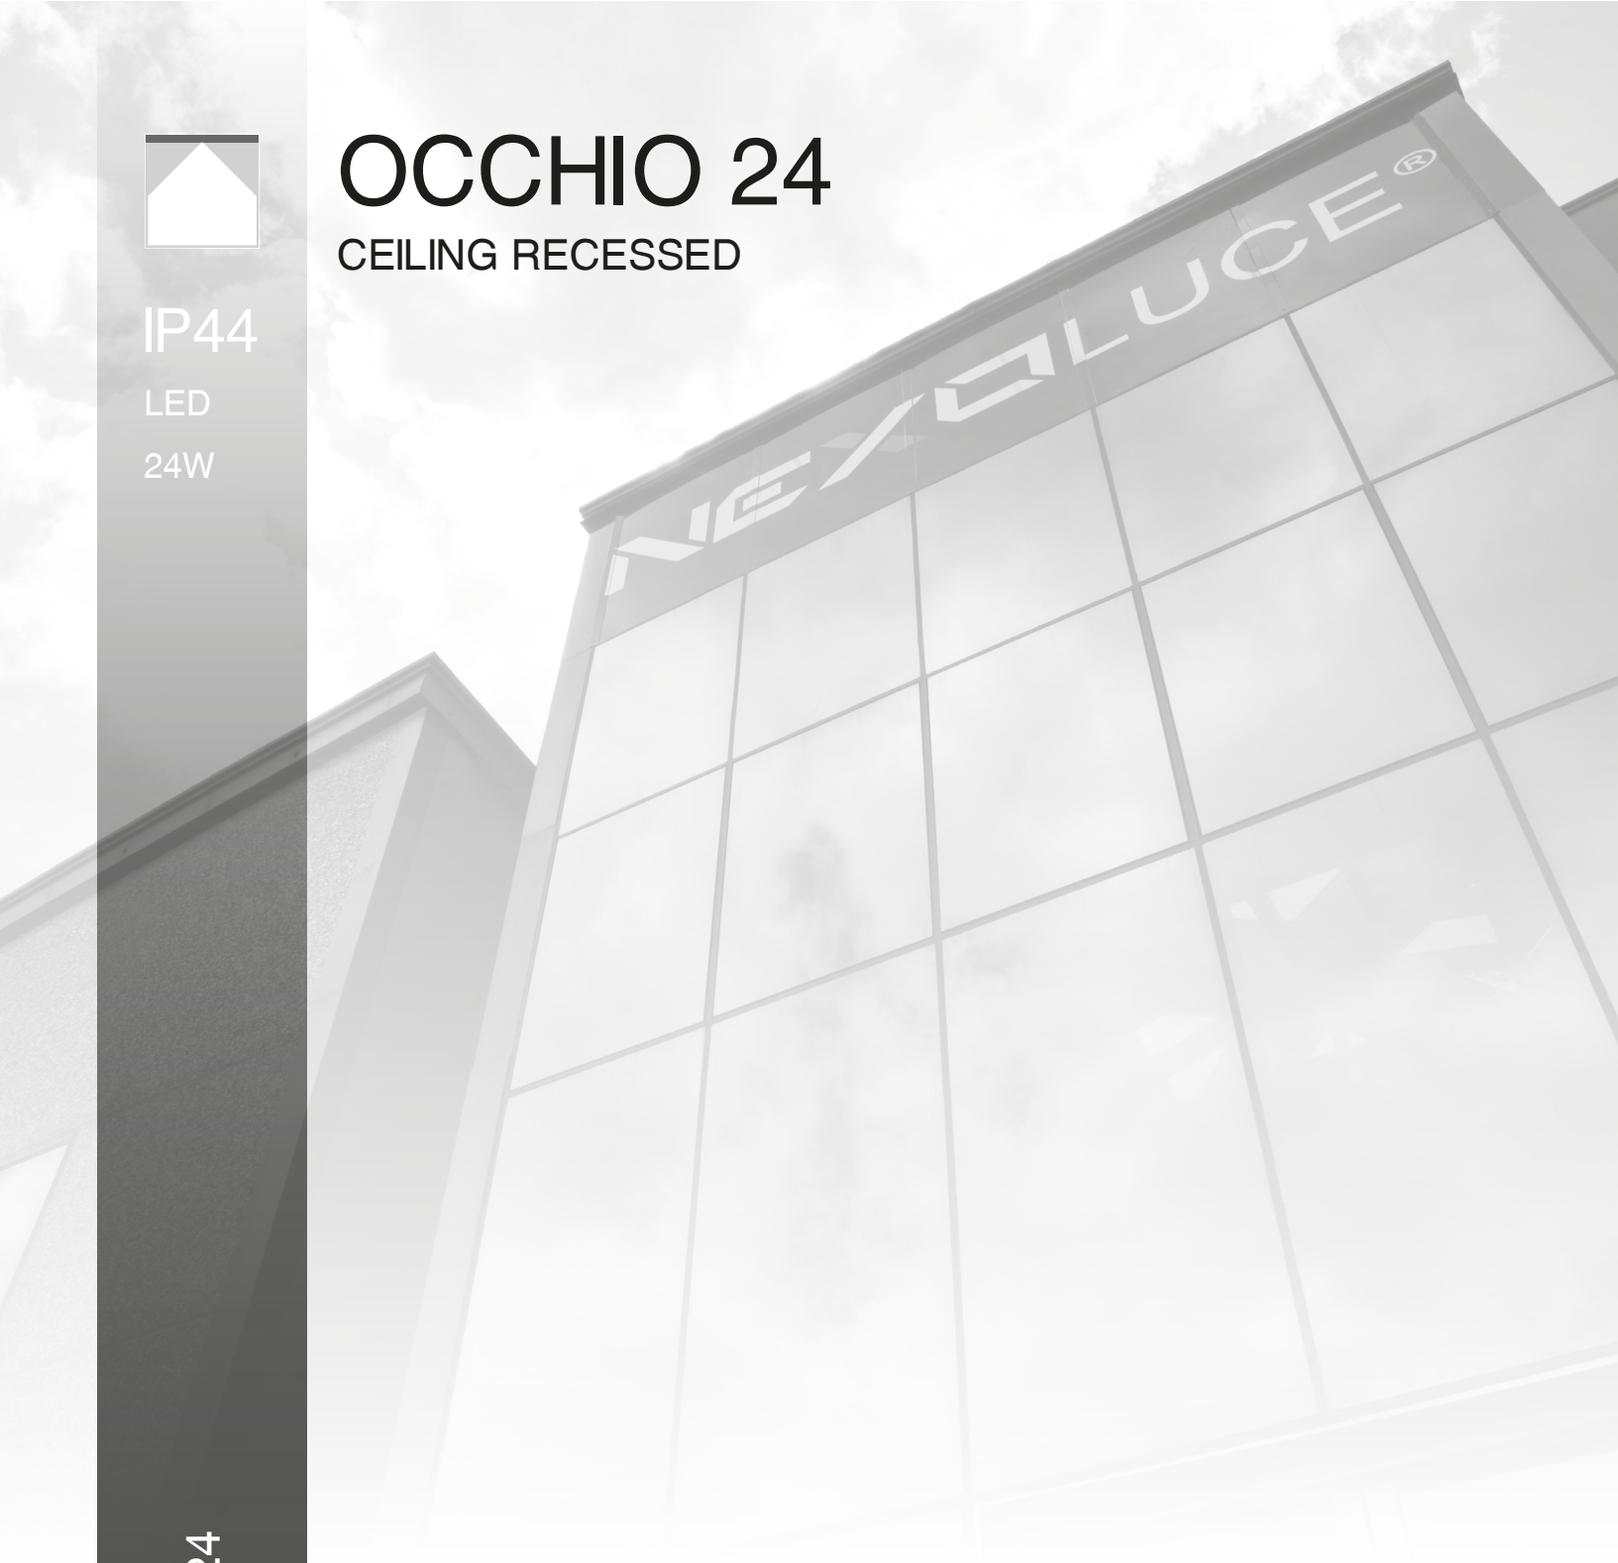

cod. 5195 /// OCCHIO 24

- *Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Polyester powder coated*
- *Clear polycarbonate diffuser*
- *Aluminium mirror reflector*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

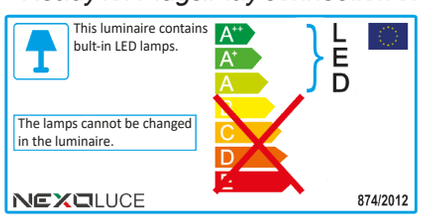





Ø 170

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

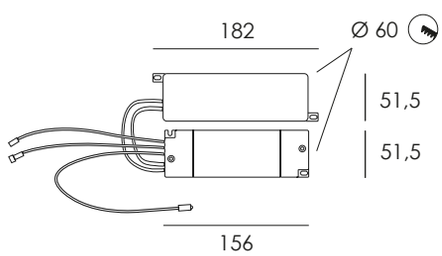

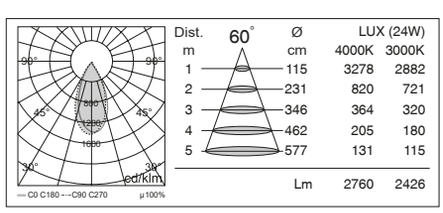

IP44 Front **IP20**Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	24 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5195	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.24** 24 W	**BA** 60°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**AR** 90°	**7** DIM. DALI	

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP44/IP20, 24W, 60°optic, ON/OFF control, frame white color without emergency kit **5195.9B.24BA1.A**

OCCHIO 30

CEILING RECESSED

IP44

LED

30W

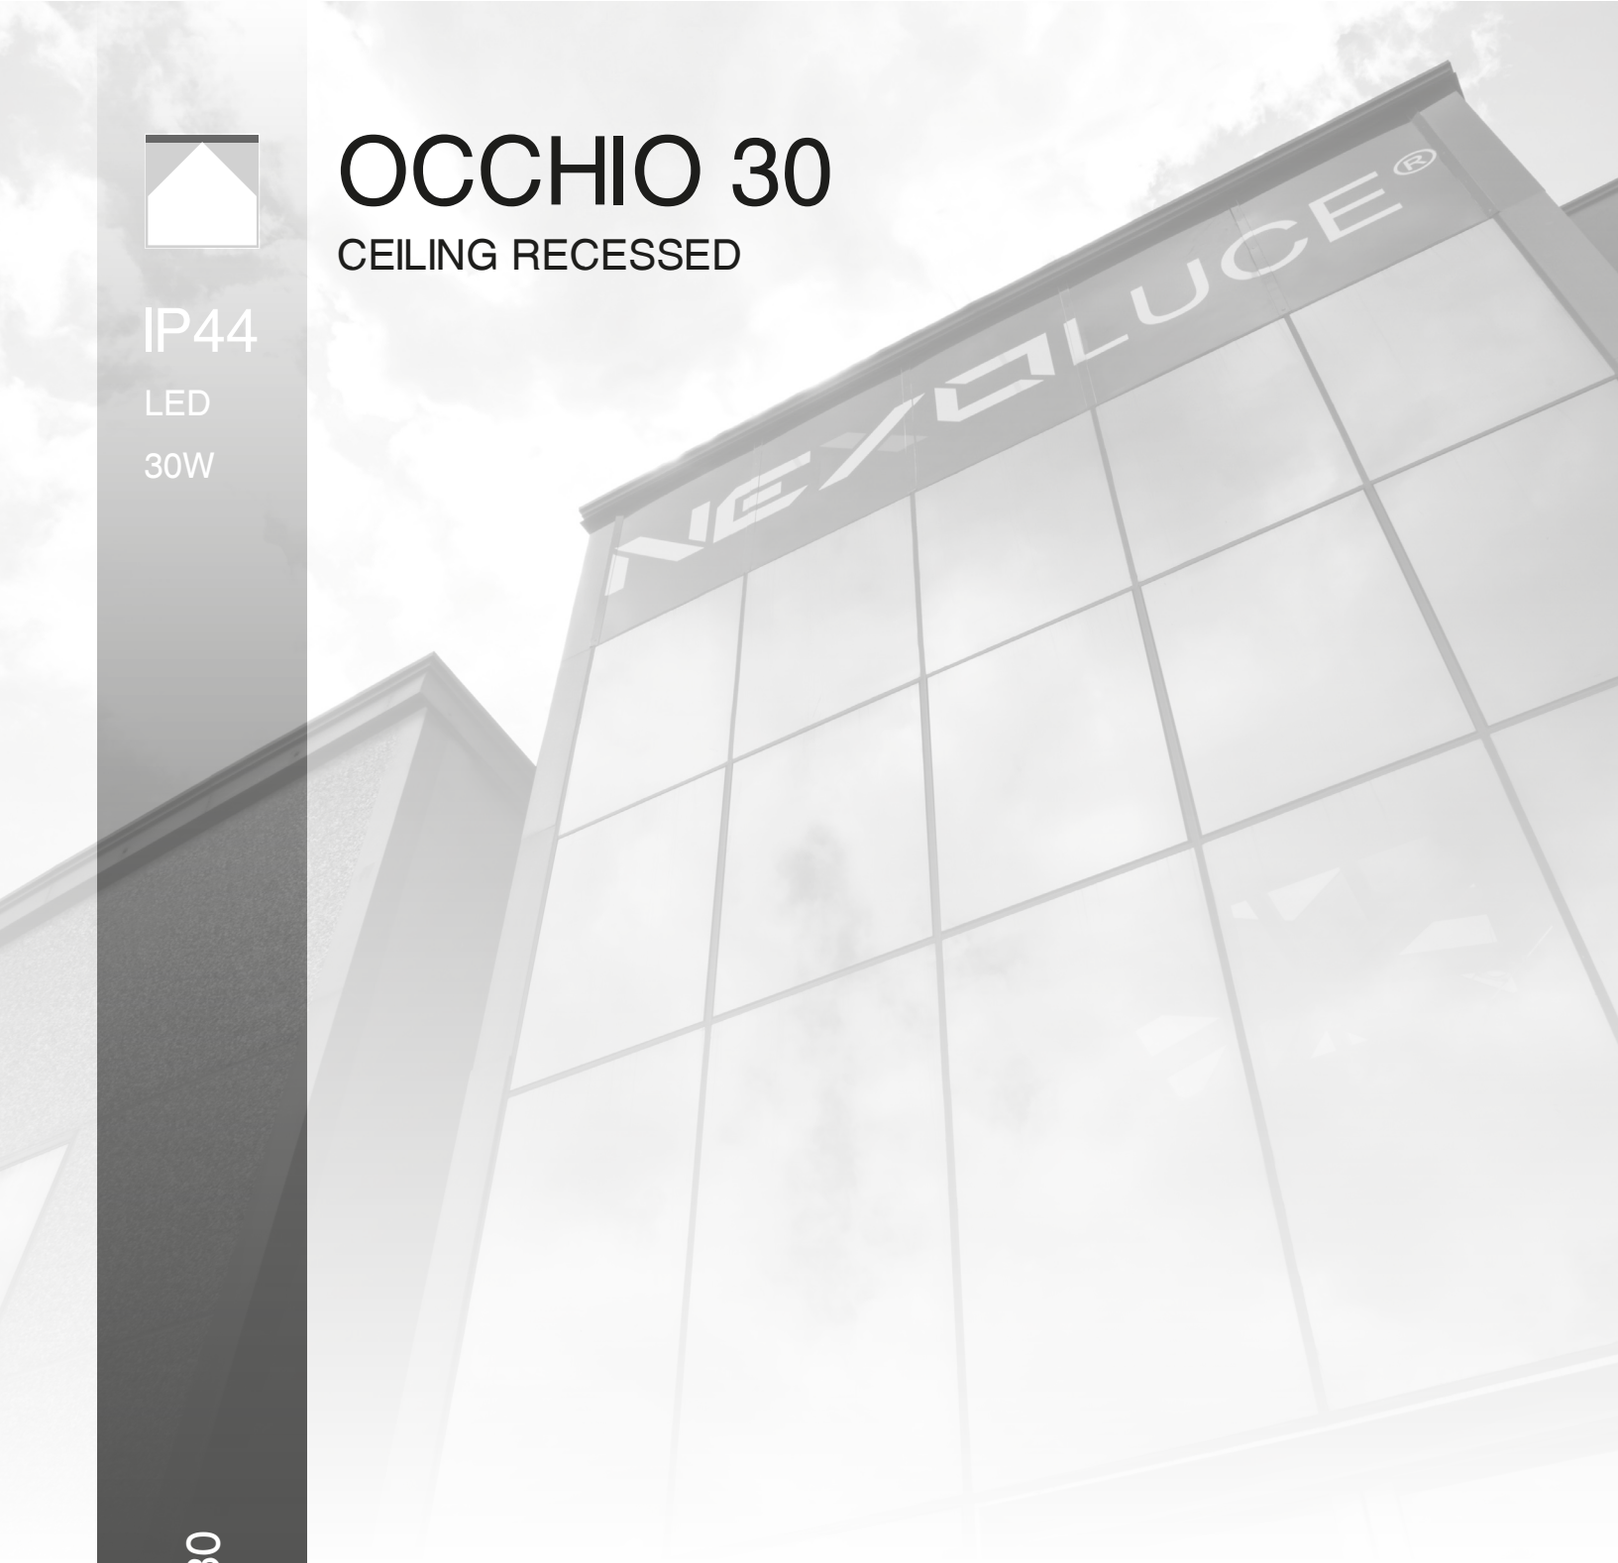

cod. 5196 /// OCCHIO 30

- *Circular recessed downlight with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Metal body*
- *Polyester powder coated*
- *Clear polycarbonate diffuser*
- *Aluminium mirror reflector*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

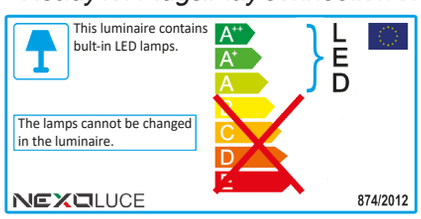





Ø 170

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

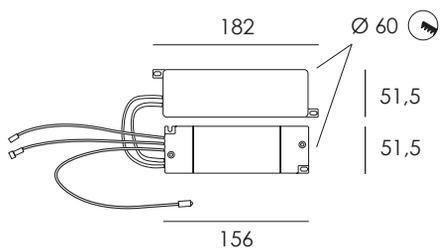

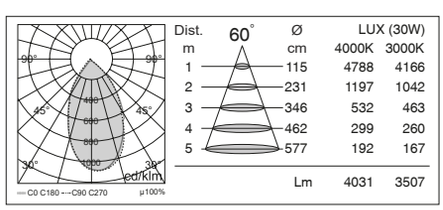

IP44 Front IP20 Back

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5196	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.30** 30 W	**BA** 60°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**AR** 90°	**7** DIM. DALI	

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP44/IP20, 30W, 60° optic, ON/OFF control, frame white color without emergency kit **5196.9B.30BA1.A**

OCCHIO 5 ADJ

CEILING RECESSED

IP40

LED

5W

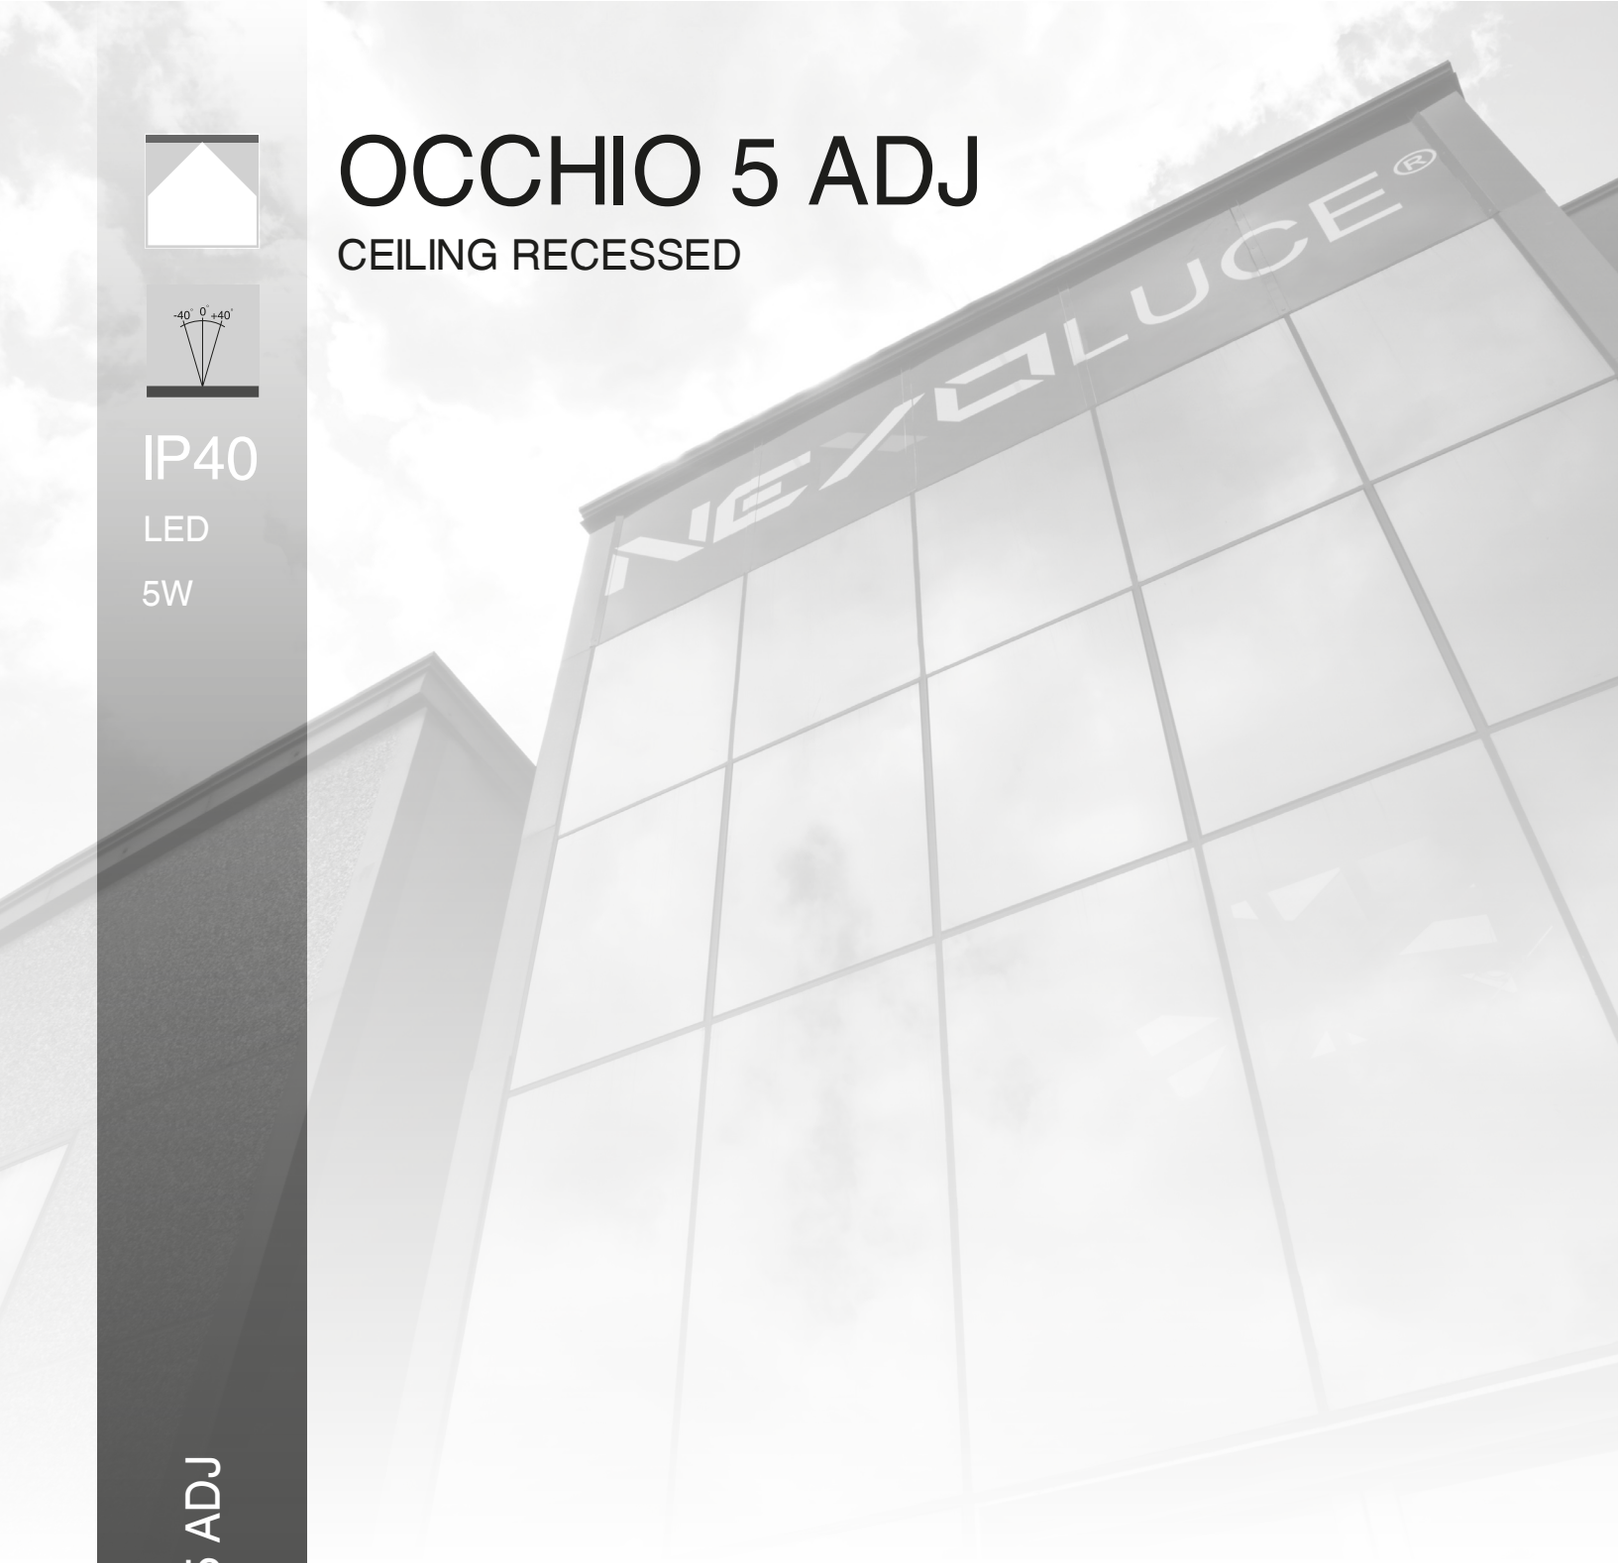

cod. 5400 /// OCCHIO 5 ADJ

cod. 5400 /// OCCHIO 5 ADJ

- *Circular recessed downlight with adjustable beam*
- *Metal body*
- *Polyester powder coated*
- *Aluminium mirror reflector*
- *System efficacy up to 100lm/W*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

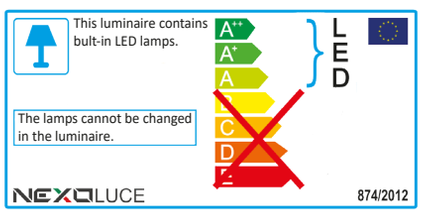





Ø 75

Finishing

WHITE

ACCESSORIES

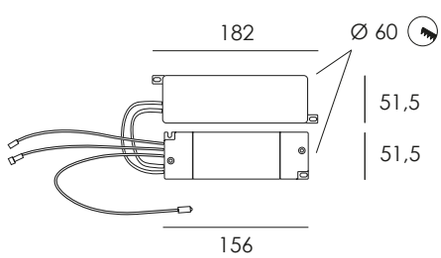

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	5 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5400	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.05** 05 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BE** 24°	**7** DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:
Recessed adjustable downlight with warm white light color at 3000K, IP40, 5W, 24°optic, ON/OFF control, frame white color without emergency kit **5400.2B.05BE1.A**

OCCHIO 10 ADJ

CEILING RECESSED



IP40

LED

10W

cod. 5402 /// OCCHIO 10 ADJ

- *Circular recessed downlight with adjustable beam*
- *Metal body*
- *Polyester powder coated*
- *Aluminium mirror reflector*
- *System efficacy up to 100lm/W*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

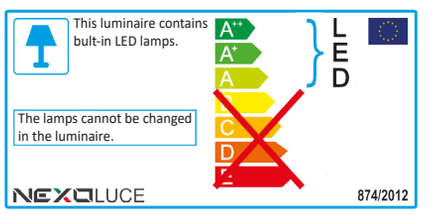





Ø 95

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

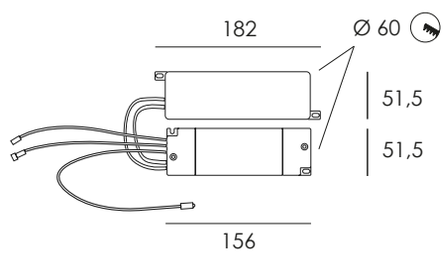

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	10 W

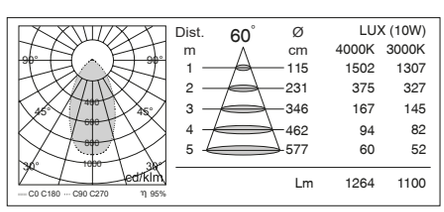

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5402	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.10** 10 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BE** 24°	**7** DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:
Recessed adjustable downlight with warm white light color at 3000K, IP40, 10W, 24°optic, ON/OFF control, frame white color without emergency kit **5402.2B.10BE1.A**

OCCHIO 15 ADJ

CEILING RECESSED

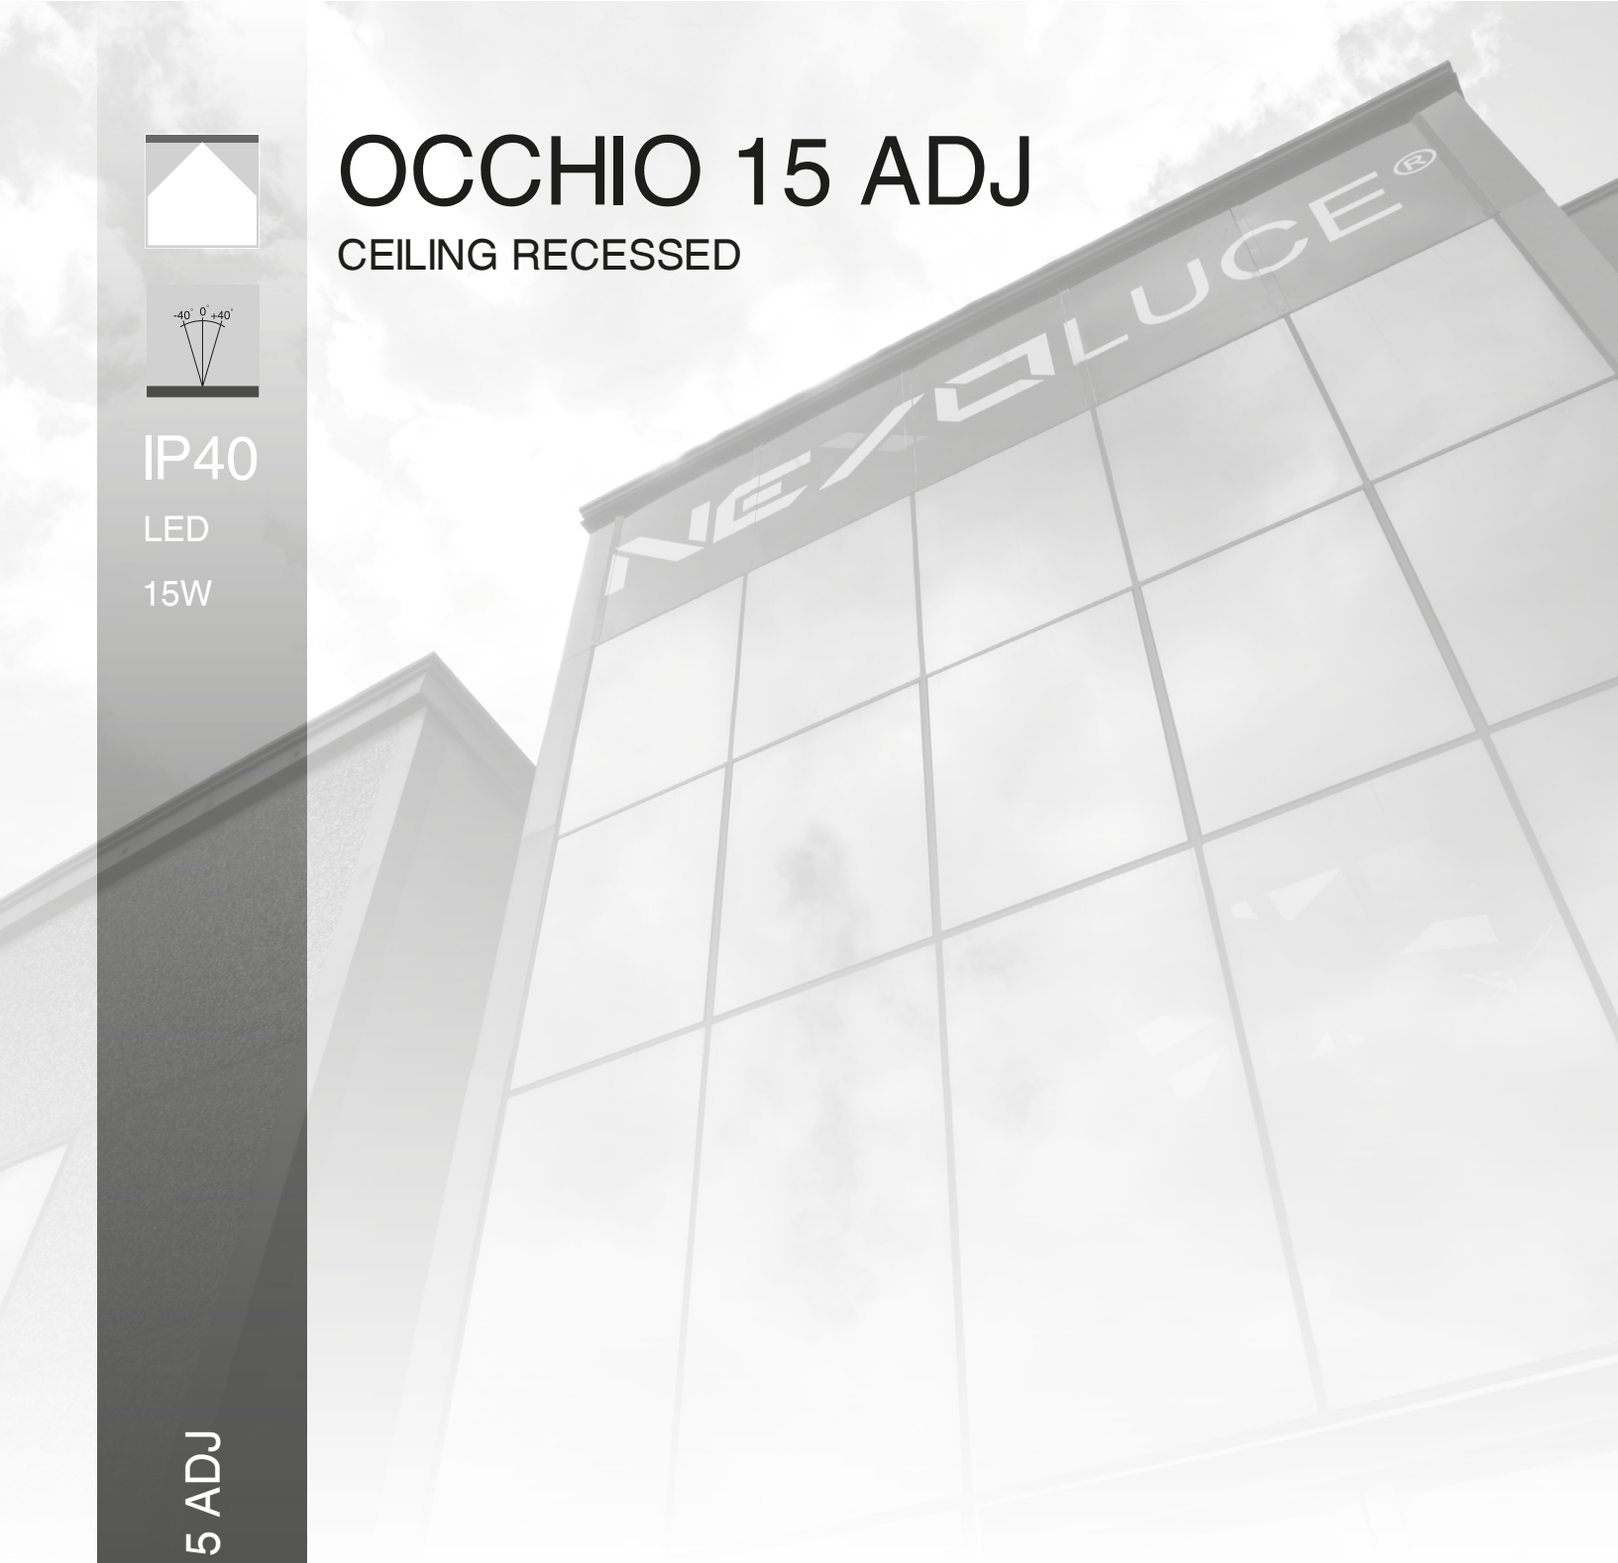

IP40

LED

15W

cod. 5404 /// OCCHIO 15 ADJ

cod. 5404 /// OCCHIO 15 ADJ

- *Circular recessed downlight with adjustable beam*
- *Metal body*
- *Polyester powder coated*
- *Aluminium mirror reflector*
- *System efficacy up to 100lm/W*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

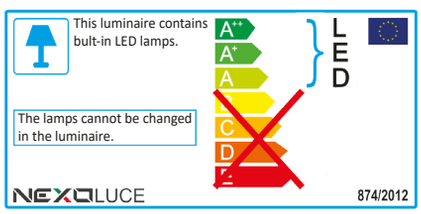





Ø 125

Finishing

WHITE

ACCESSORIES

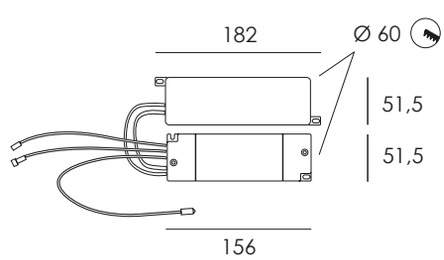

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5404	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.15** 15 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BE** 24°	**7** DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:
Recessed adjustable downlight with warm white light color at 3000K, IP40, 15W, 24°optic, ON/OFF control, frame white color without emergency kit **5404.2B.15BE1.A**

OCCHIO 20 ADJ

CEILING RECESSED



IP40

LED

20W

cod. 5406 /// OCCHIO 20 ADJ

cod. 5406 /// OCCHIO 20 ADJ

- *Circular recessed downlight with adjustable beam*
- *Metal body*
- *Polyester powder coated*
- *Aluminium mirror reflector*
- *System efficacy up to 100lm/W*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

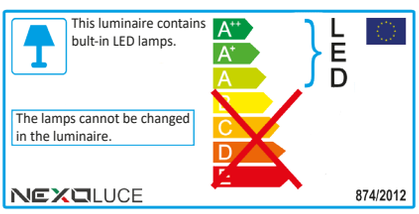





Ø 125

Finishing

WHITE

ACCESSORIES

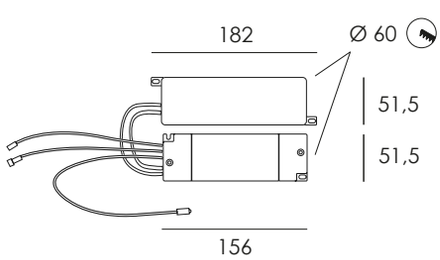

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	20 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5406	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.20** 20 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BE** 24°	**7** DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:
Recessed adjustable downlight with warm white light color at 3000K, IP40, 20W, 24°optic, ON/OFF control, frame white color without emergency kit **5406.2B.20BE1.A**

OCCHIO 24 ADJ

CEILING RECESSED



IP40

LED

24W

cod. 5407 /// OCCHIO 24 ADJ

cod. 5407 /// OCCHIO 24 ADJ

- *Circular recessed downlight with adjustable beam*
- *Metal body*
- *Polyester powder coated*
- *Aluminium mirror reflector*
- *System efficacy up to 100lm/W*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

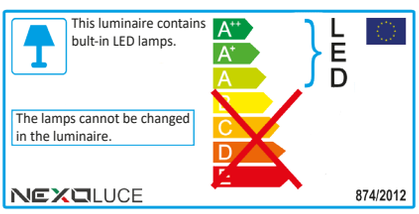





Ø 145

Finishing

WHITE

ACCESSORIES

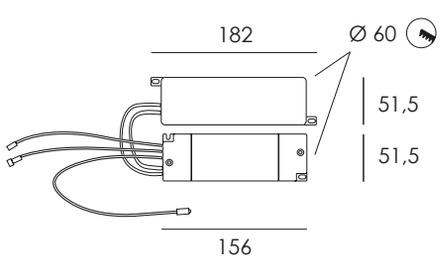

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	24 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5407	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.24** 24 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BE** 24°	**7** DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:
Recessed adjustable downlight with warm white light color at 3000K, IP40, 24W, 24°optic, ON/OFF control, frame white color without emergency kit **5407.2B.24BE1.A**

OCCHIO 30 ADJ

CEILING RECESSED



IP40

LED

30W

cod. 5408 /// OCCHIO 30 ADJ

cod. 5408 /// OCCHIO 30 ADJ

- *Circular recessed downlight with adjustable beam*
- *Metal body*
- *Polyester powder coated*
- *Aluminium mirror reflector*
- *System efficacy up to 100lm/W*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

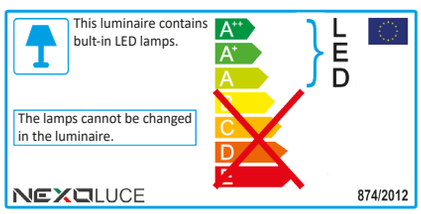





Ø 145

Finishing

WHITE

ACCESSORIES

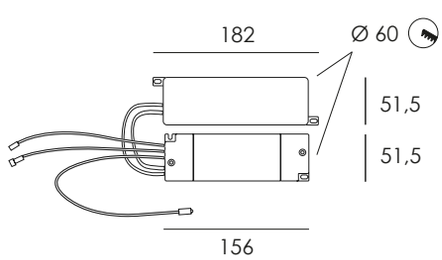

IP40

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5408	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.30** 30 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**BE** 24°	**7** DIM. DALI	
					.H 40°		
					BA 60°		

CODE EXAMPLE:
Recessed adjustable downlight with warm white light color at 3000K, IP40, 30W, 24°optic, ON/OFF control, frame white color without emergency kit **5408.2B.30BE1.A**

RETINA 5

CEILING RECESSED

IP65

LED

5W

cod. 5197 /// RETINA 5

- *Circular recessed downlight*
- *Metal body*
- *Opal polycarbonate diffuser*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 1)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

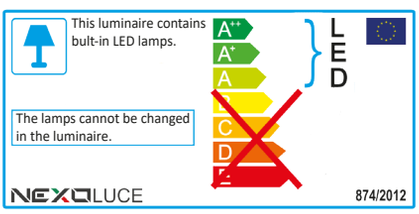





Finishing

WHITE

ACCESSORIES

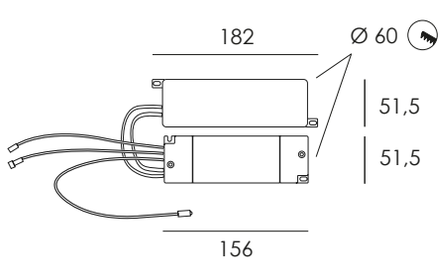

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	5 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5197	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.05** 5 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 5W, 90°optic, ON/OFF control, frame white color without emergency kit **5197.5B.05AR1.A**

RETINA 10

CEILING RECESSED

IP65

LED

10W

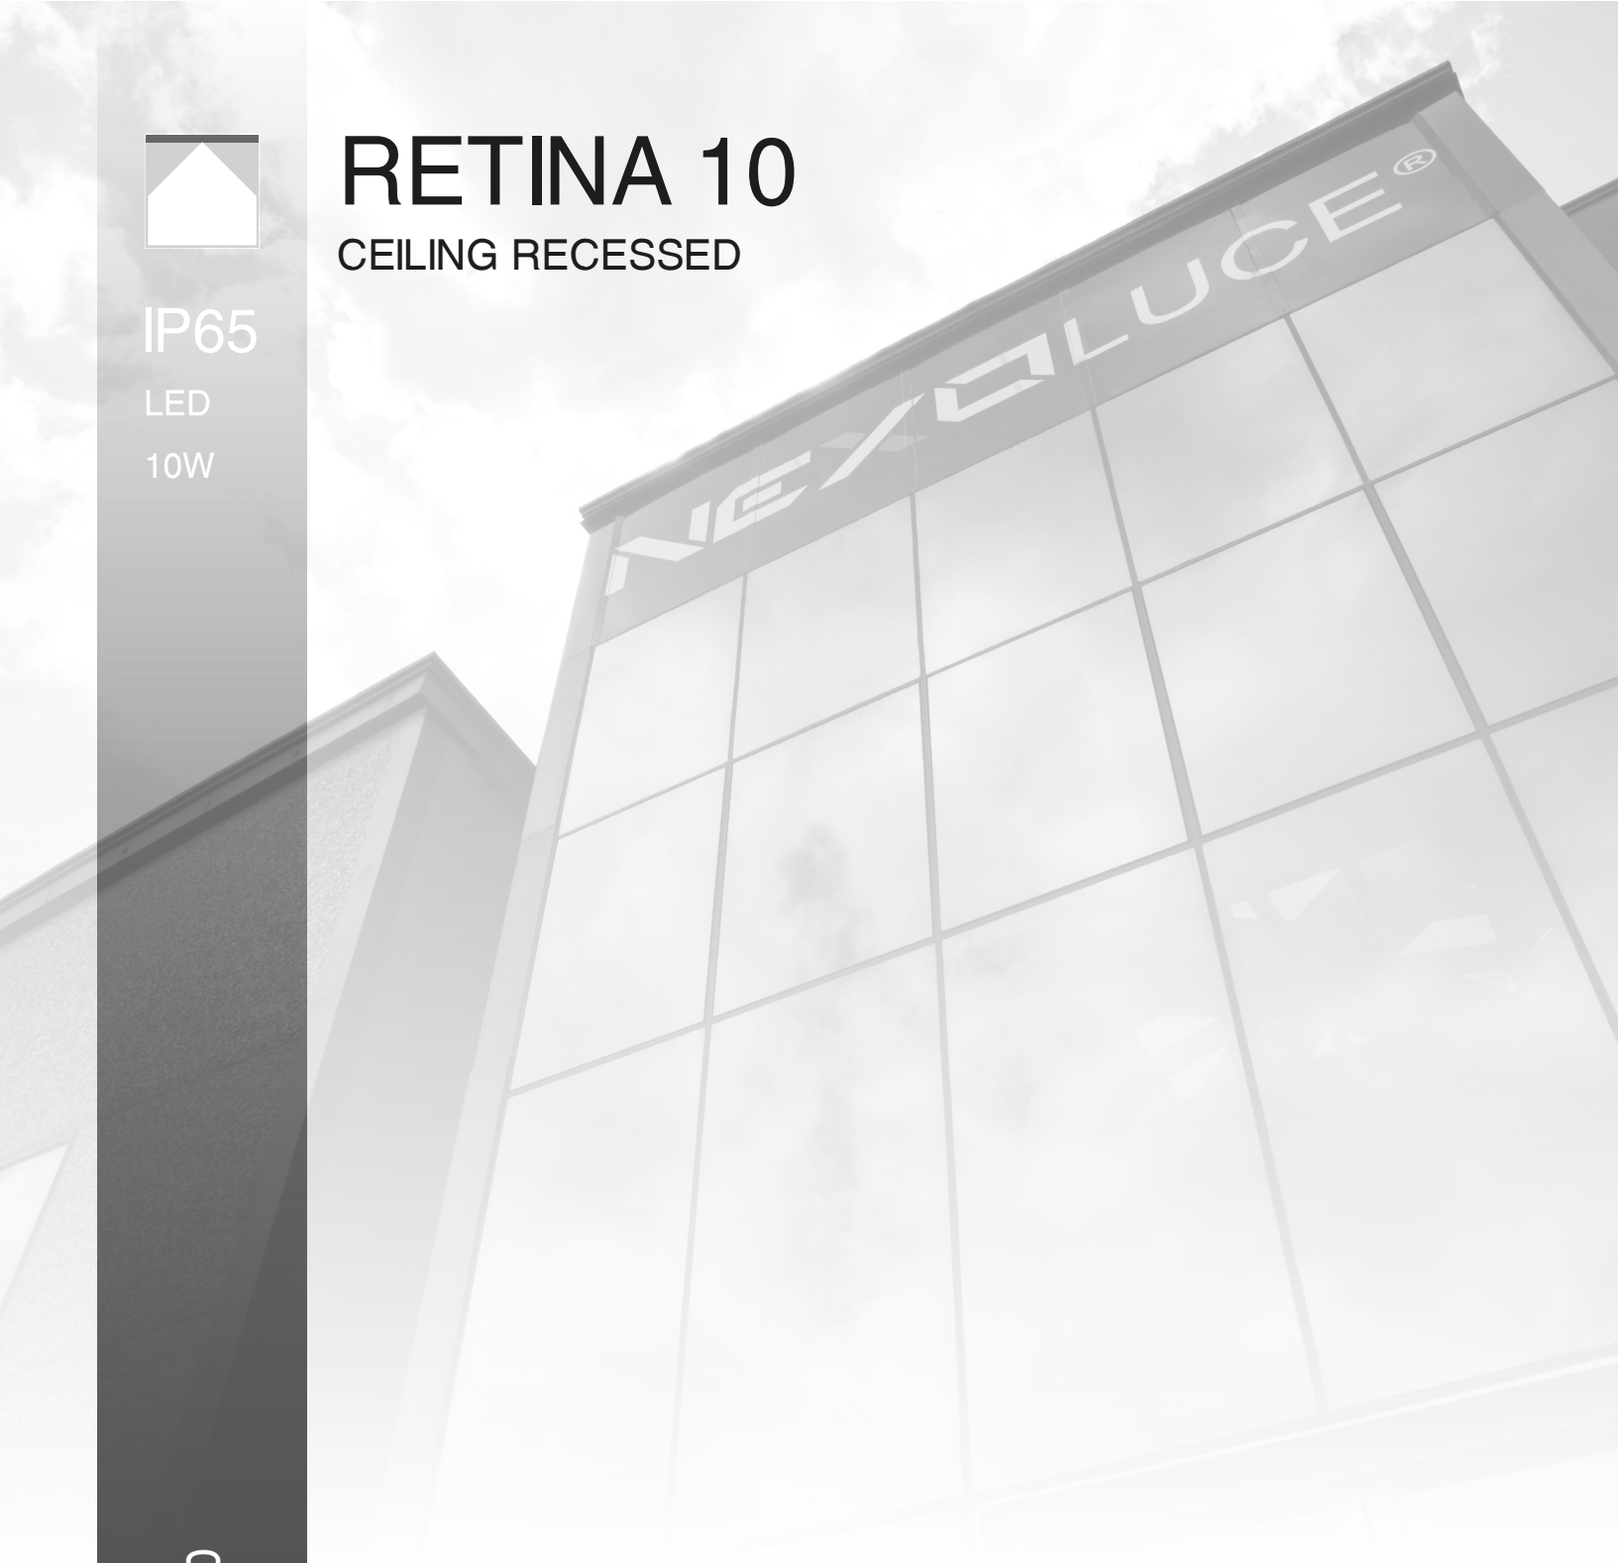

cod. 5199 /// RETINA 10

- *Circular recessed downlight*
- *Metal body*
- *Opal polycarbonate diffuser*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 1)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

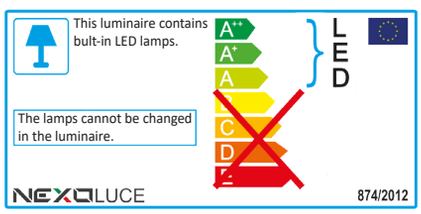





Ø 92

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

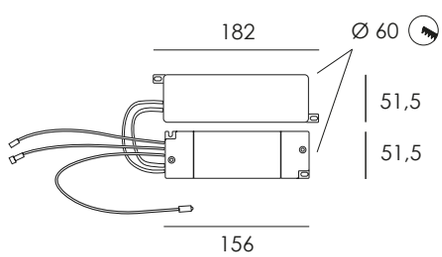

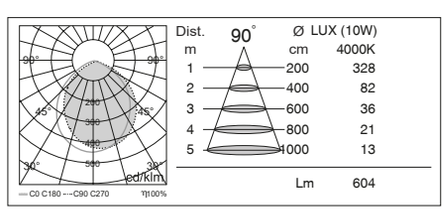

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	10 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5199	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.10** 10 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 10W, 90°optic, ON/OFF control, frame white color without emergency kit **5199.5B.10AR1.A**

RETINA 15

CEILING RECESSED

IP65

LED

15W

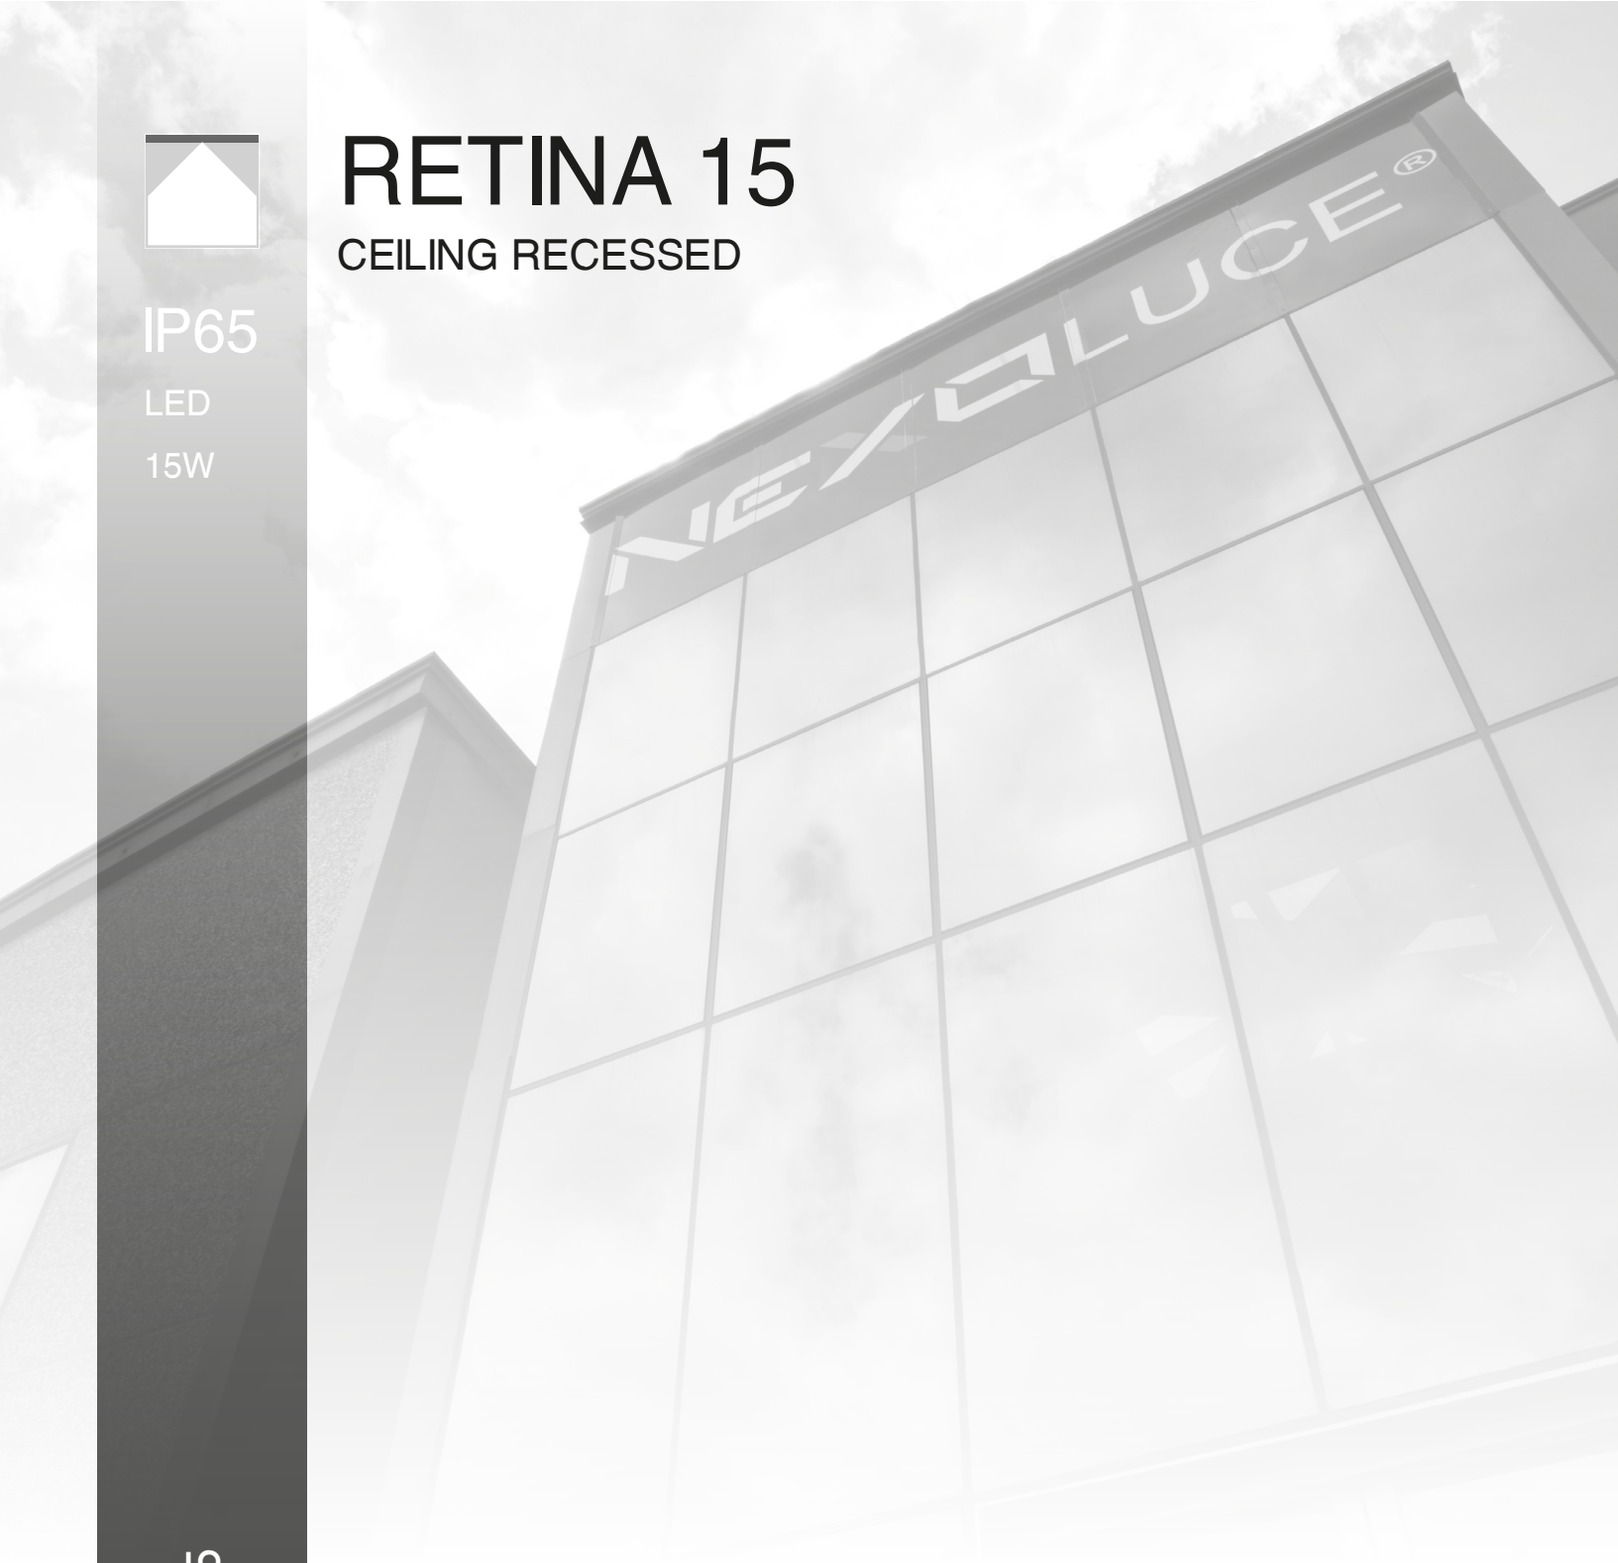

cod. 5201 /// RETINA 15

- *Circular recessed downlight*
- *Metal body*
- *Opal polycarbonate diffuser*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 1)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

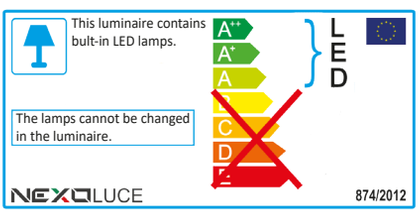





Finishing

WHITE

ACCESSORIES

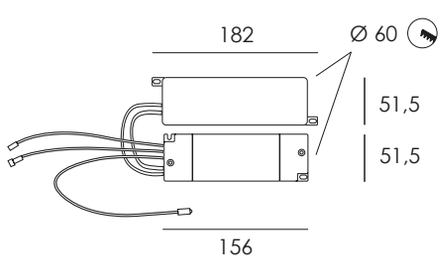

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	15 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5201	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.15** 15 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 15W, 90°optic, ON/OFF control, frame white color without emergency kit **5201.5B.15AR1.A**

RETINA 20

CEILING RECESSED

IP65

LED

20W

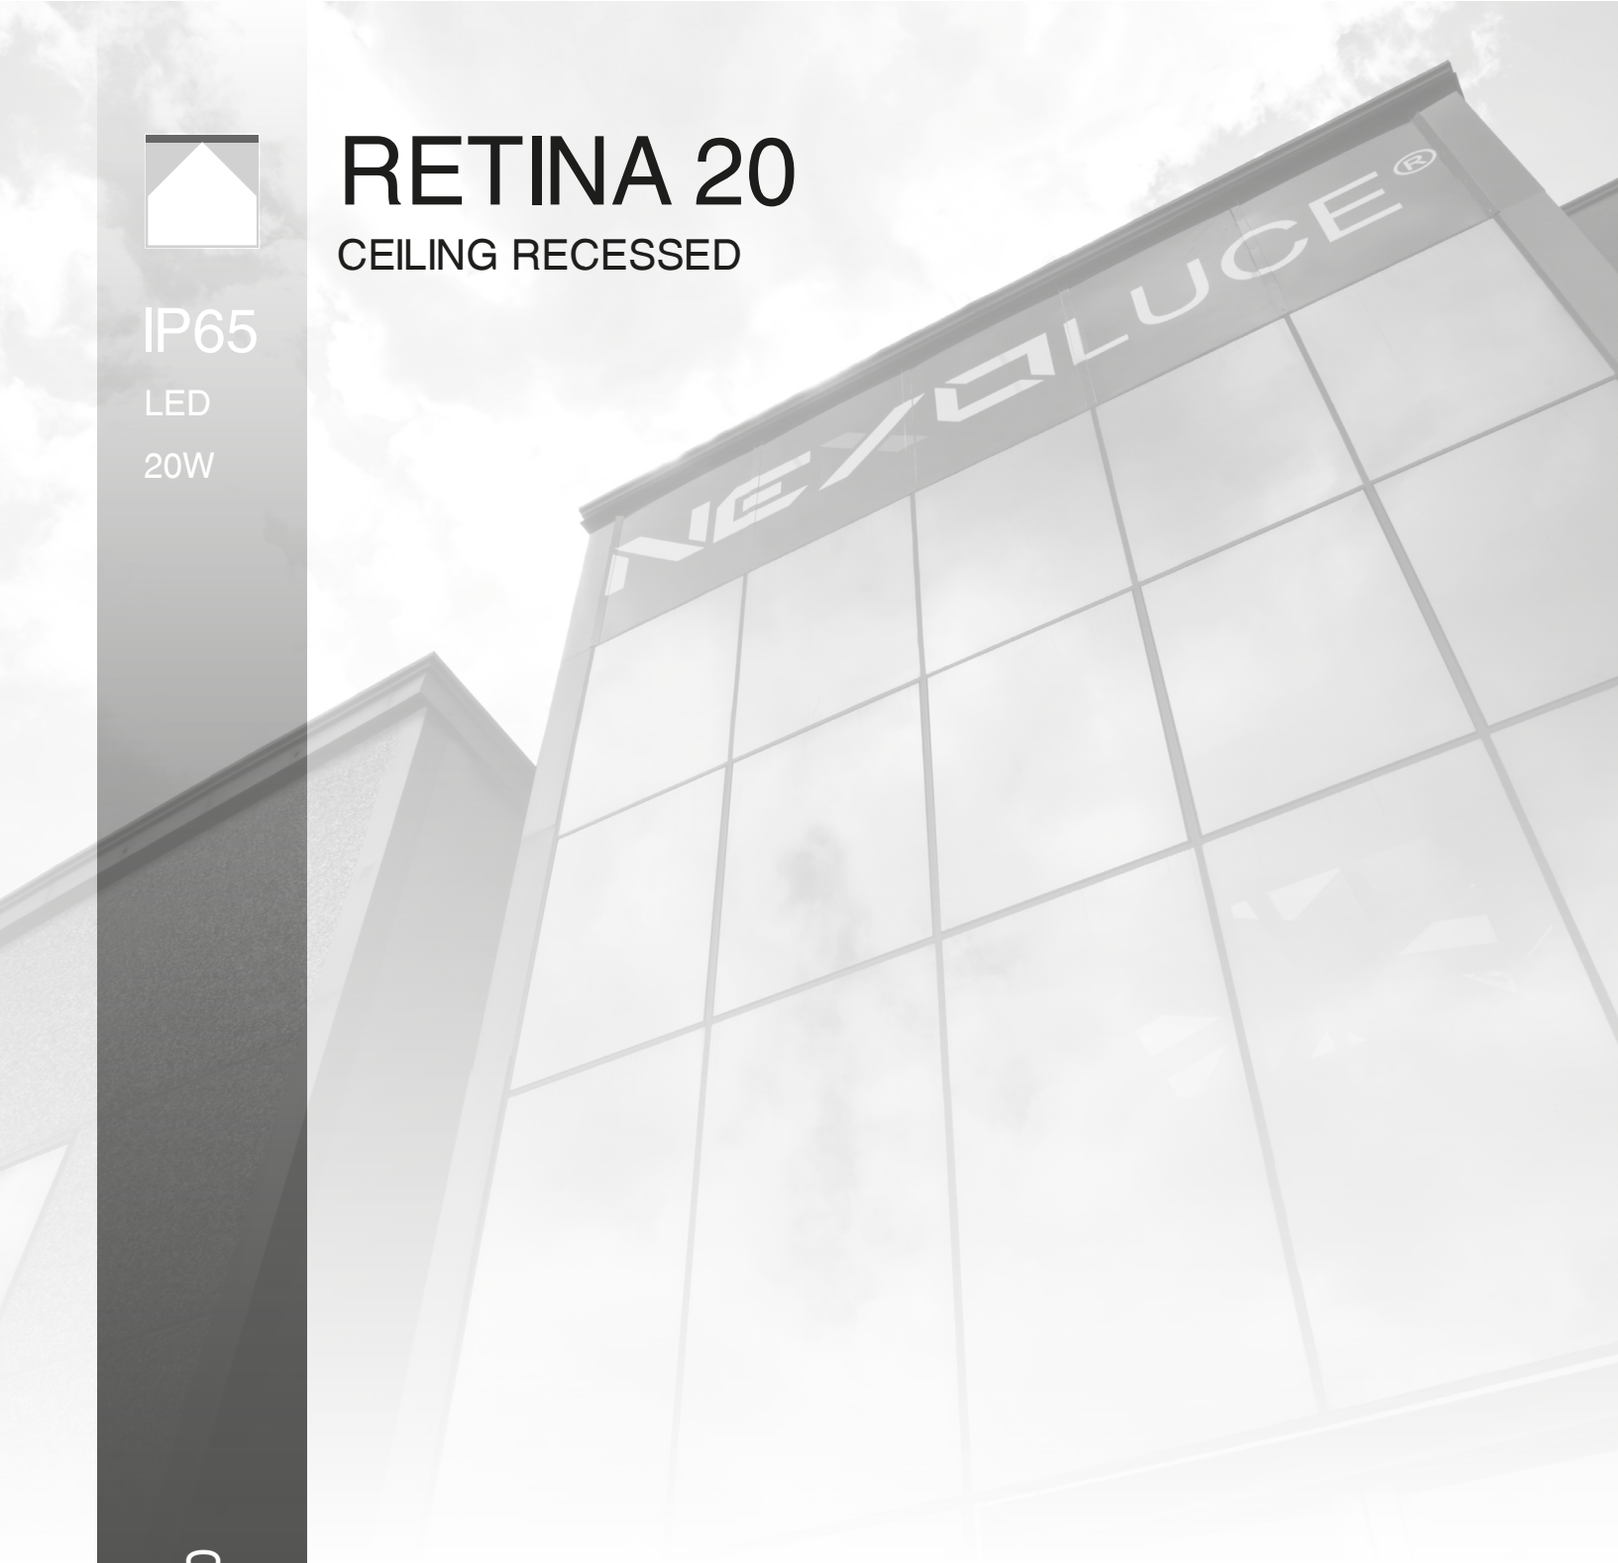

cod. 5203 /// RETINA 20

- *Circular recessed downlight*
- *Metal body*
- *Opal polycarbonate diffuser*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 1)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

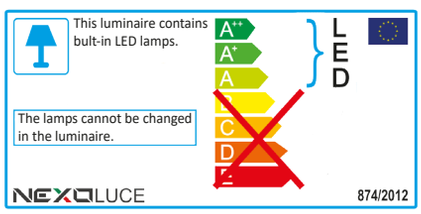





ACCESSORIES

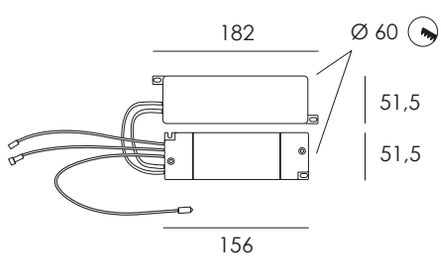

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

Finishing

WHITE

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	20 W

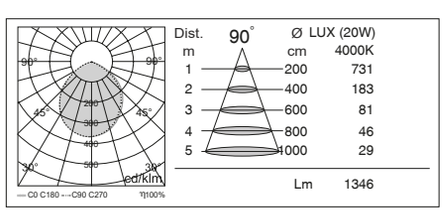

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5203	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.20** 20 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 20W, 90°optic, ON/OFF control, frame white color without emergency kit **5203.5B.20AR1.A**

RETINA 24

CEILING RECESSED

IP65

LED

24W

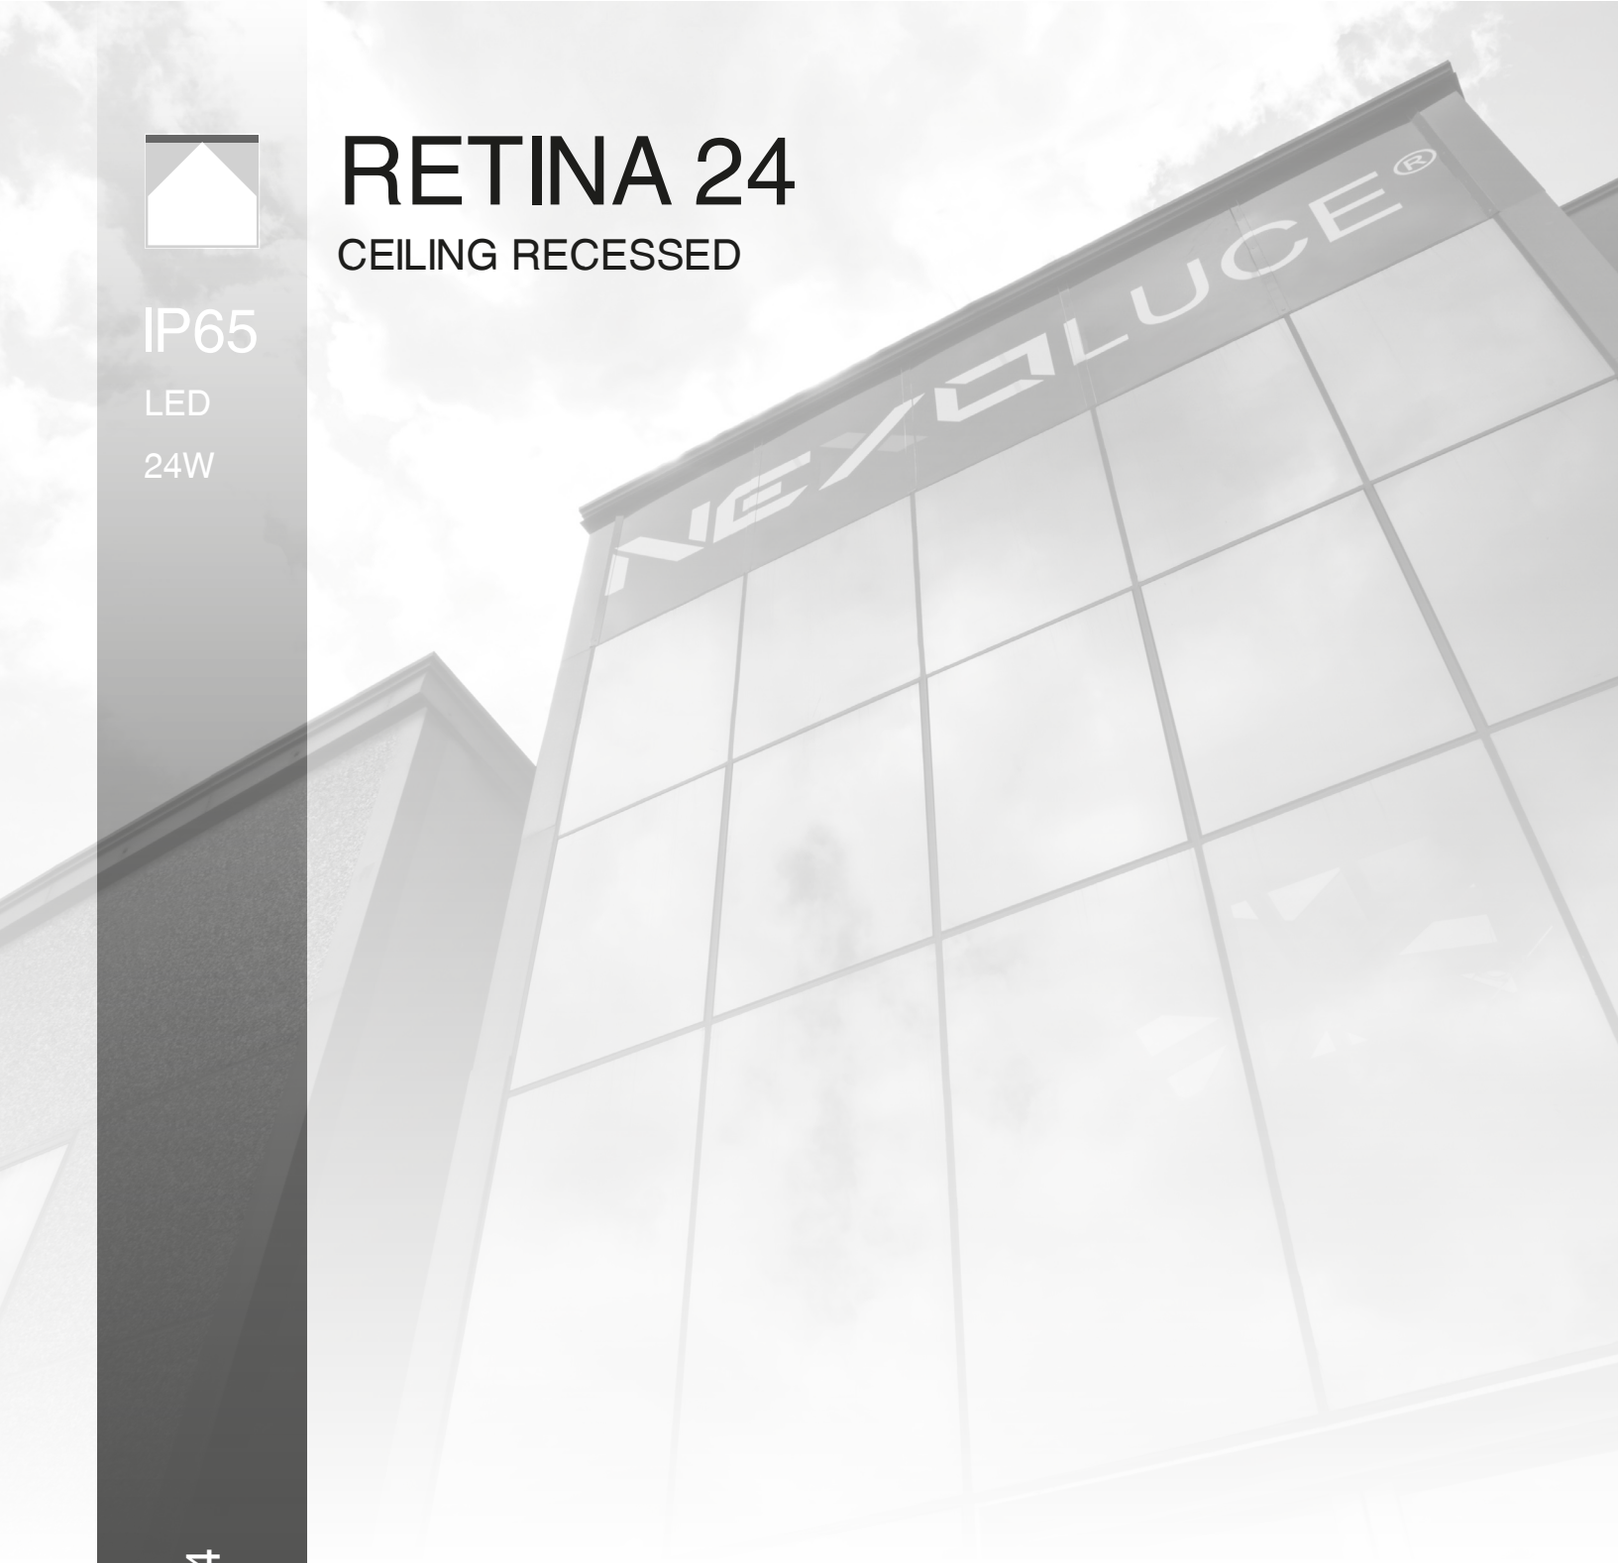

cod. 5204 /// RETINA 24

- *Circular recessed downlight*
- *Metal body*
- *Opal polycarbonate diffuser*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 1)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

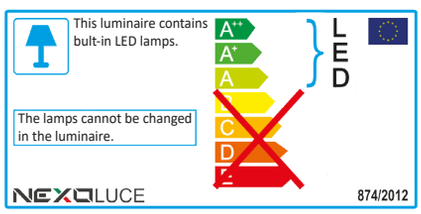





ACCESSORIES

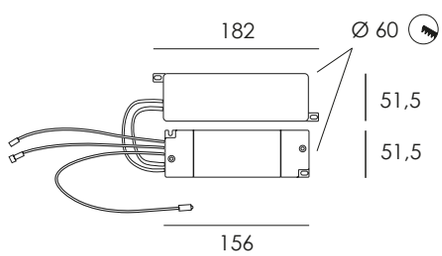

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

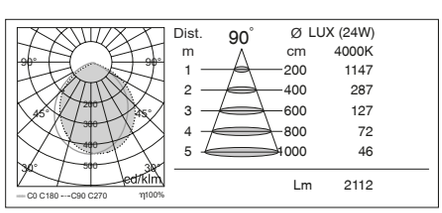

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5204	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.24** 24 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 24W, 90°optic, ON/OFF control, frame white color without emergency kit **5204.5B.24AR1.A**

RETINA 30

CEILING RECESSED

IP65

LED

30W

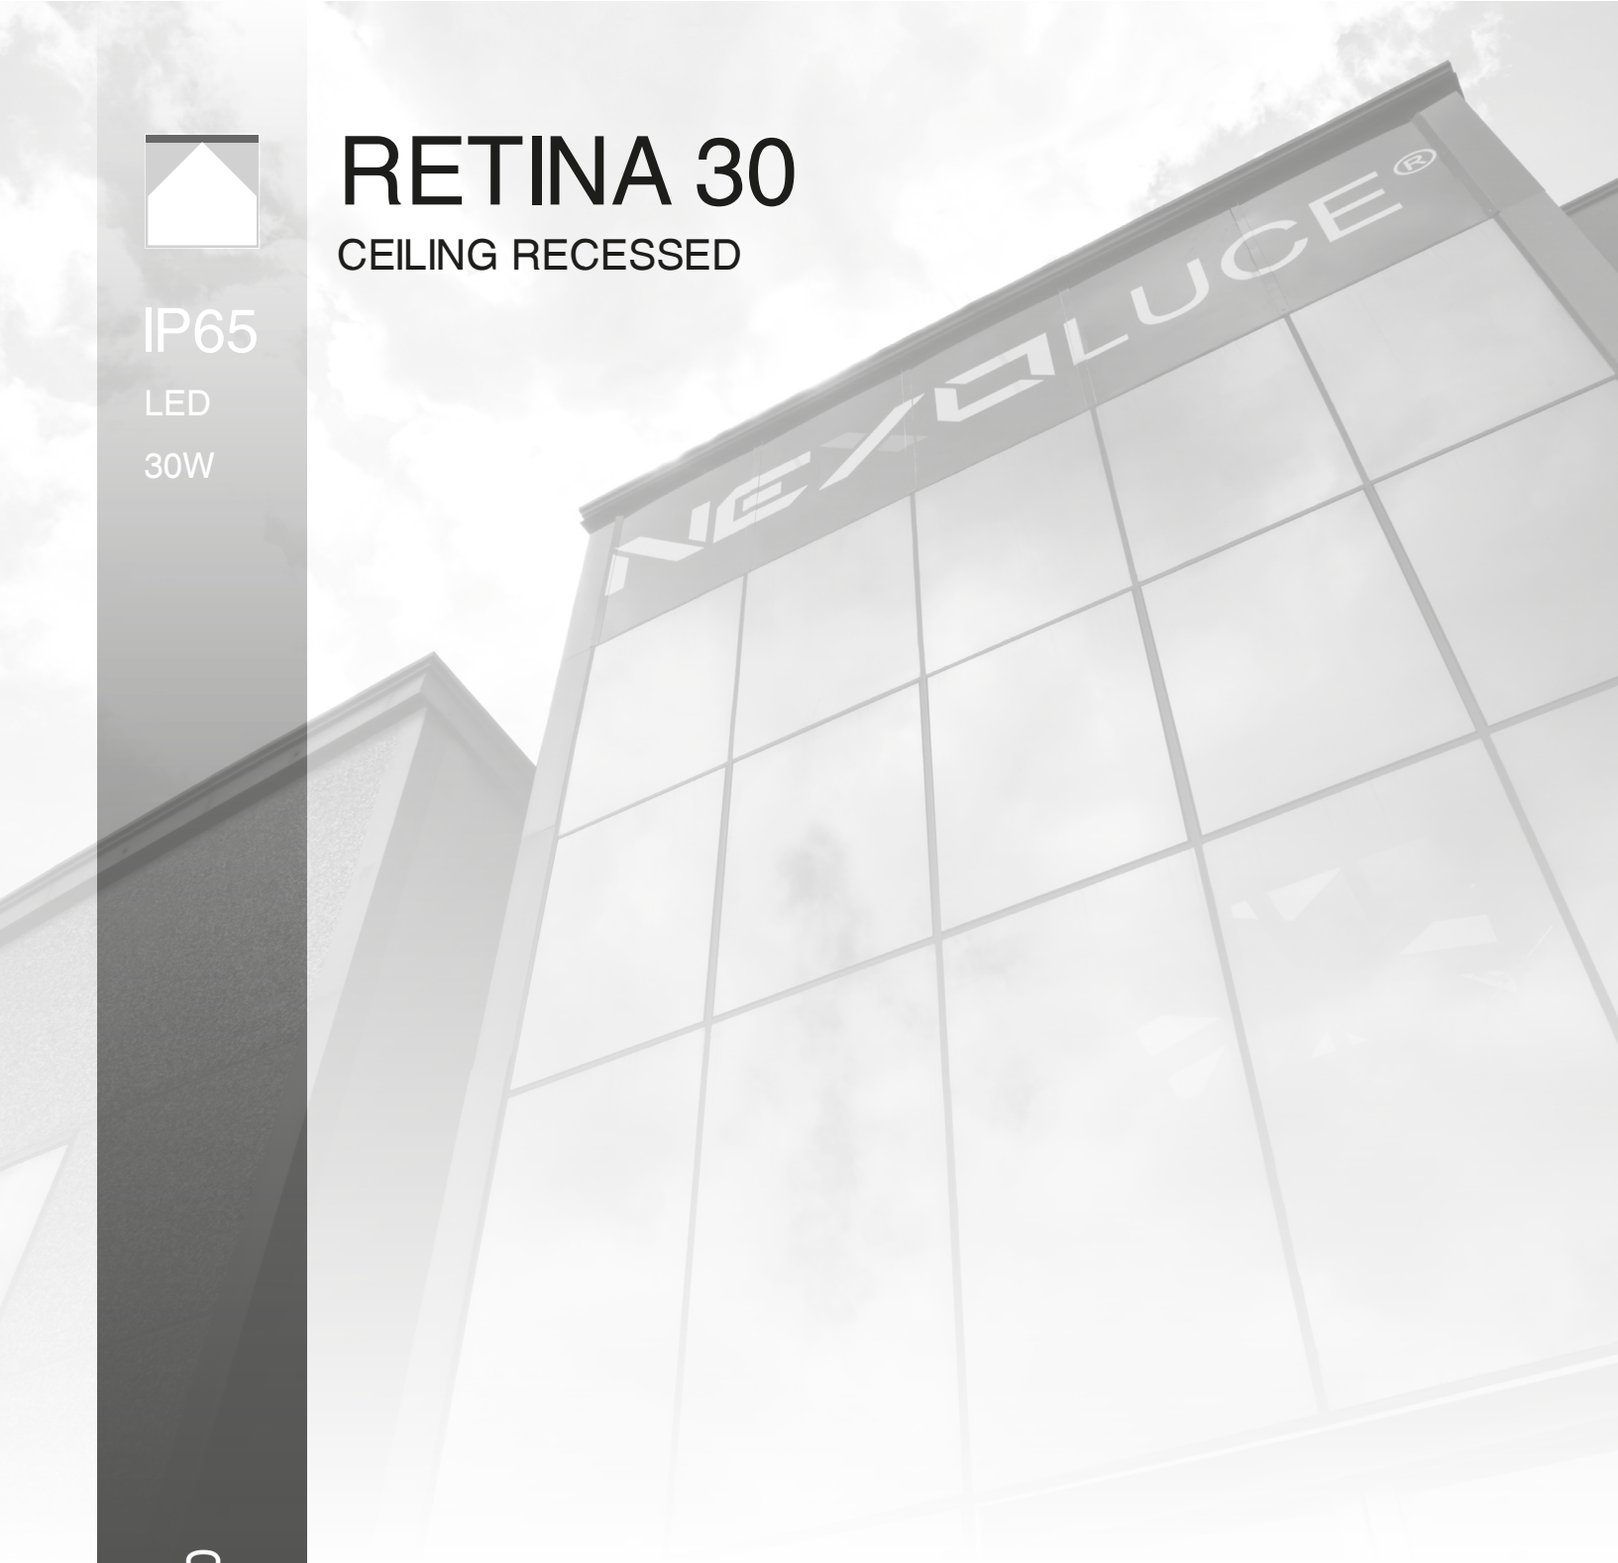

cod. 5205 /// RETINA 30

- *Circular recessed downlight*
- *Metal body*
- *Opal polycarbonate diffuser*
- *Springs for installation*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 1)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

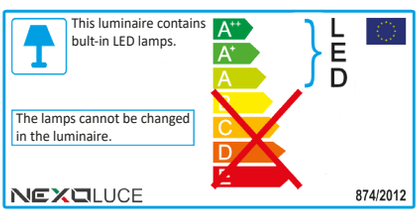





Finishing

WHITE

ACCESSORIES

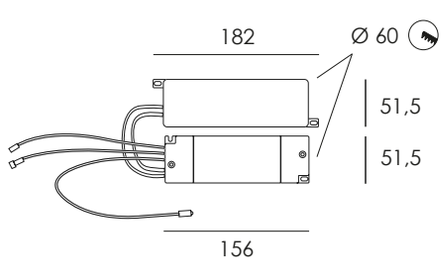

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5205	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.30** 30 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 30W, 90°optic, ON/OFF control, frame white color without emergency kit **5205.5B.30AR1.A**

OBLÓ 6

CEILING RECESSED

IP44

LED

6W

cod. 5163 /// OBLÓ 6

- *Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

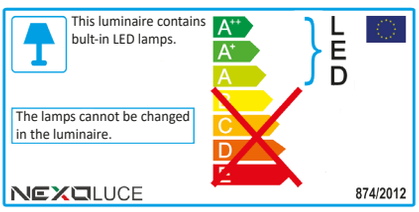





Ø 105

ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

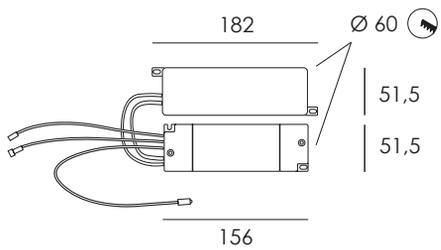

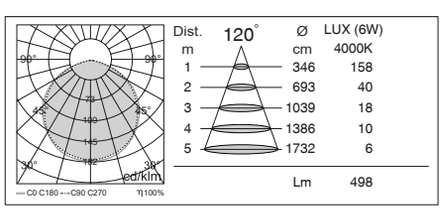

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	6 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5163	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.06** 6 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				**AE** SILVER

CODE EXAMPLE:
Recessed round panel with warm white light color at 3000K, IP44/IP20, 6W, ON/OFF control, frame white color without emergency kit **5163.9B.06.Z1.A**

OBLÓ 12

CEILING RECESSED

IP44

LED

12W

cod. 5165 /// OBLÓ 12

- *Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

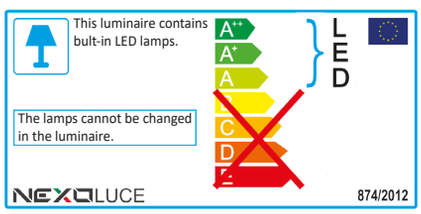





Ø 160

ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

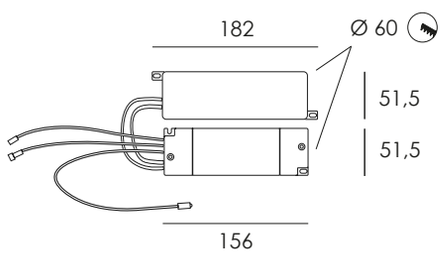

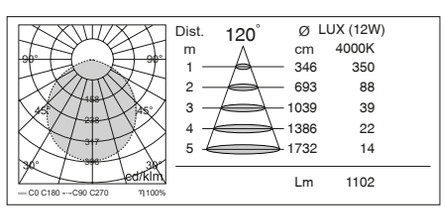

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5165	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.12** 12 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				**AE** SILVER

CODE EXAMPLE:
Recessed round panel with warm white light color at 3000K, IP44/IP20, 12W, ON/OFF control, frame white color without emergency kit **5165.9B.12.Z1.A**

OBLÓ 18

CEILING RECESSED

IP44

LED

18W

cod. 5095 /// OBLÓ 18

- *Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

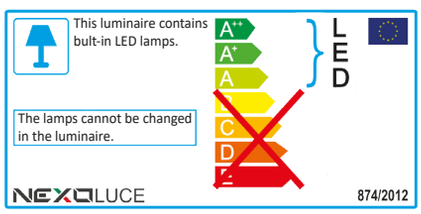





Ø 210

ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

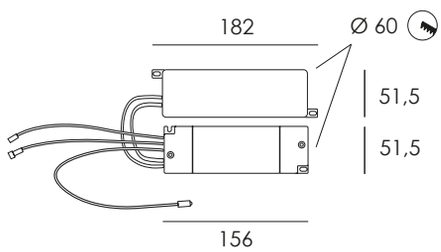

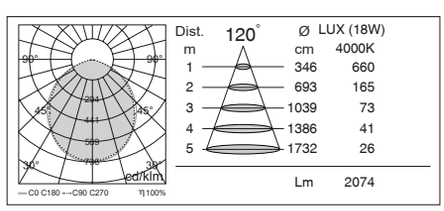

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5095	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.18** 18 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				**AE** SILVER

CODE EXAMPLE:
Recessed round panel with warm white light color at 3000K, IP44/IP20, 18W, ON/OFF control, frame white color without emergency kit **5095.9B.18.Z1.A**

OBLÓ 24

CEILING RECESSED

IP44

LED

24W

cod. 5096 /// OBLÓ 24

- *Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

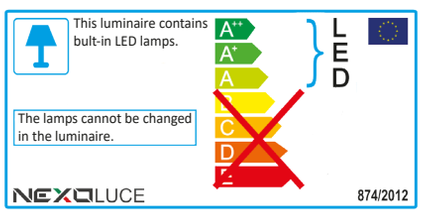





Ø 280

ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

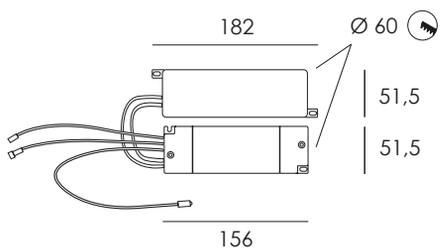

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

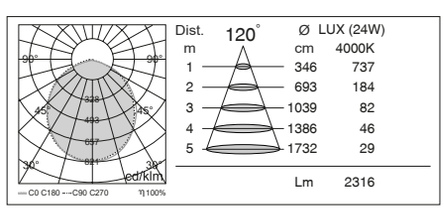

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5096	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.24** 24 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				**AE** SILVER

CODE EXAMPLE:
Recessed round panel with warm white light color at 3000K, IP44/IP20, 24W, ON/OFF control, frame white color without emergency kit **5096.9B.24.Z1.A**

OBLÓ 30

CEILING RECESSED

IP44

LED

30W

cod. 5168 /// OBLÓ 30

- *Recessed round LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

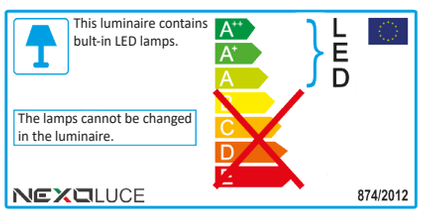





Ø 280

ACCESSORIES



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

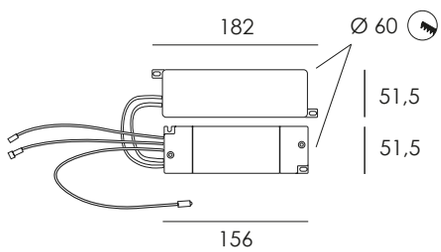

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

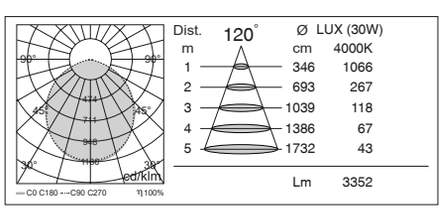

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5168	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.30** 30 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				**AE** SILVER

CODE EXAMPLE:
Recessed round panel with warm white light color at 3000K, IP44/IP20, 30W, ON/OFF control, frame white color without emergency kit **5168.9B.30.Z1.A**

QUABLÓ 6

CEILING RECESSED

IP44

LED

6W

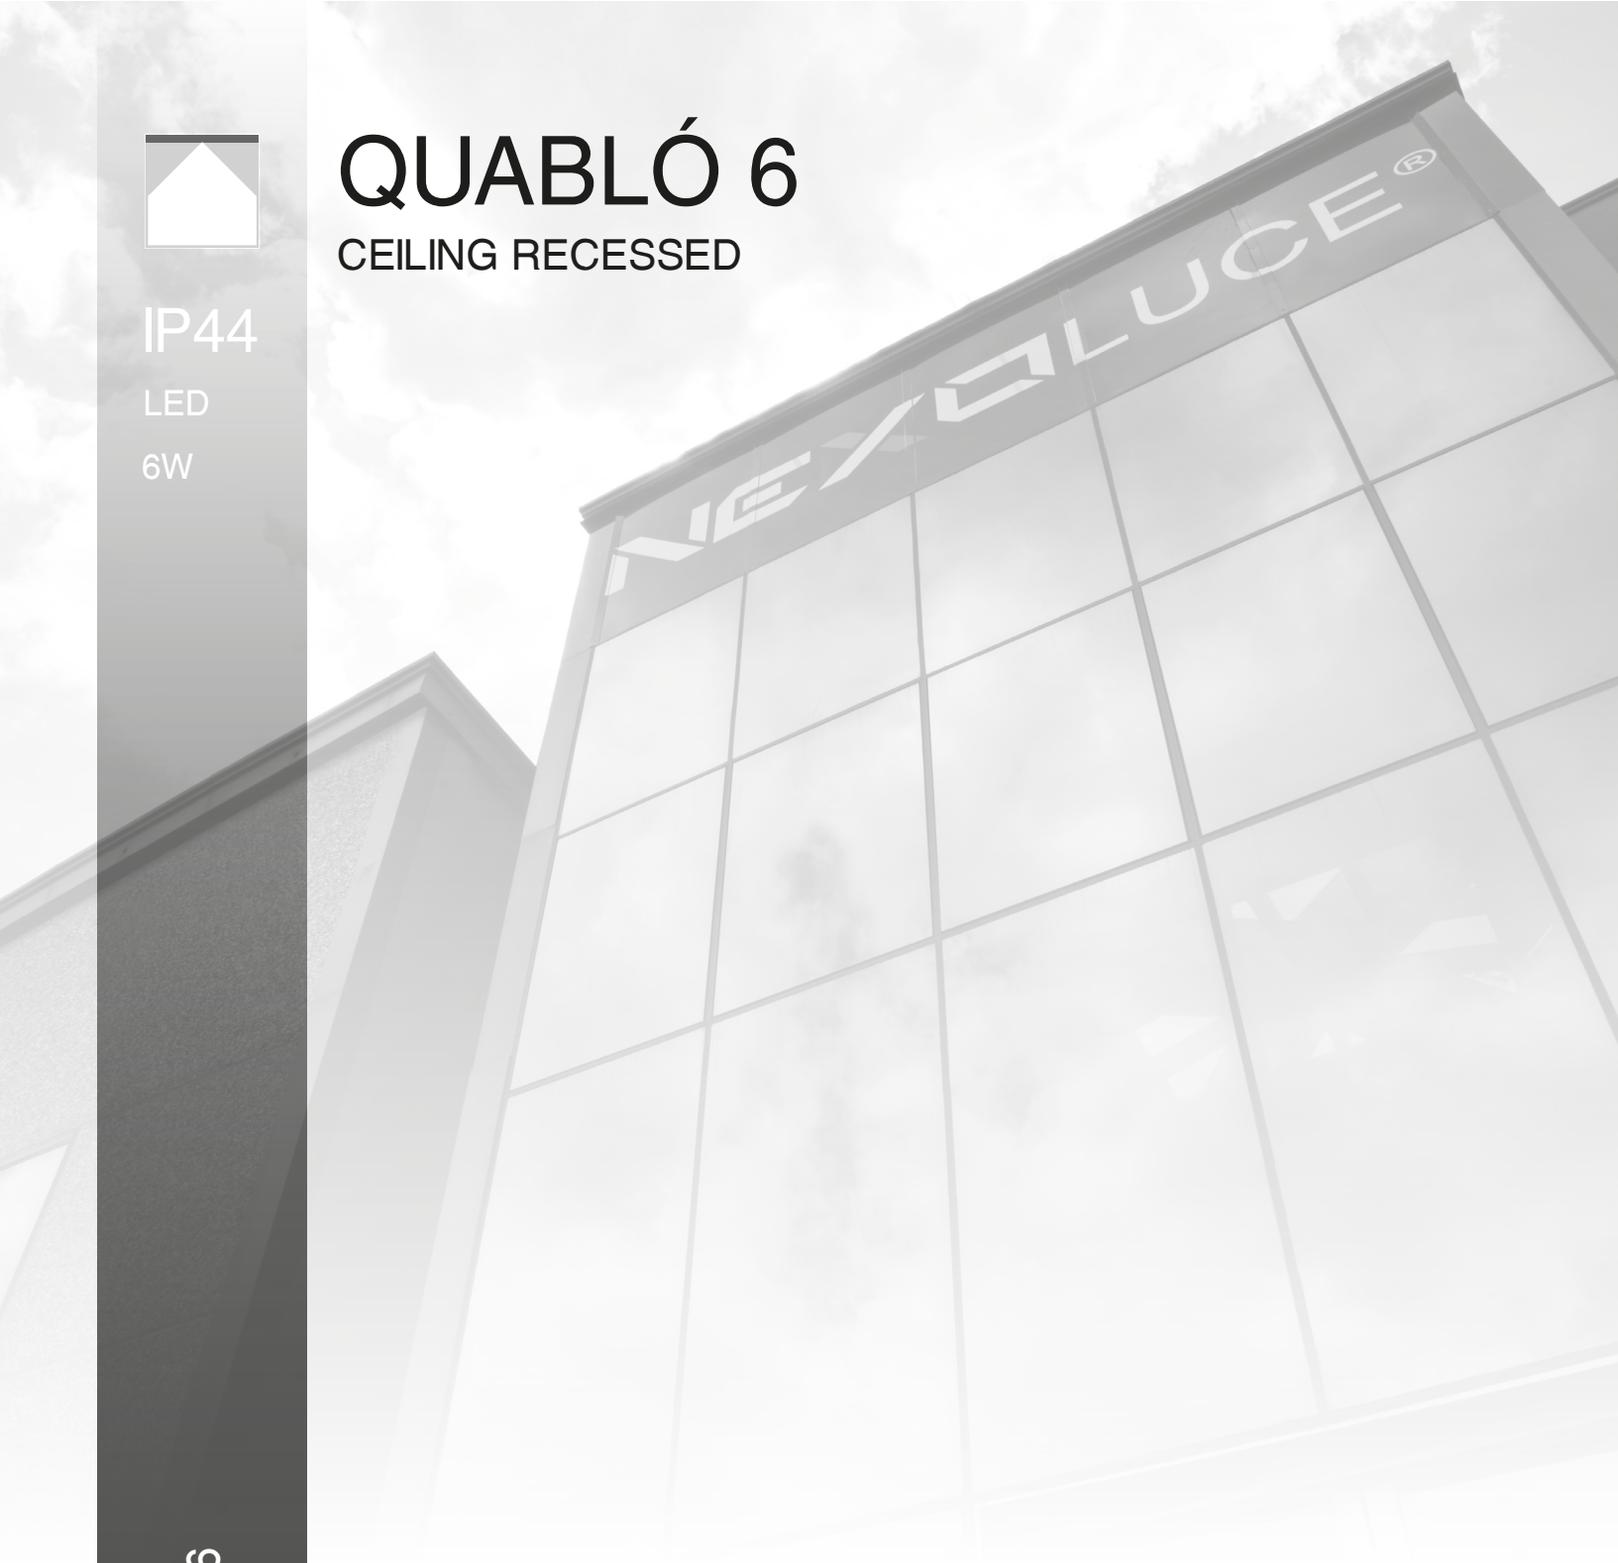

cod. 5169 /// QUABLÓ 6

- *Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

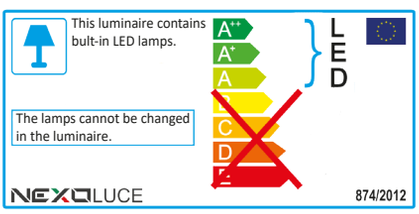



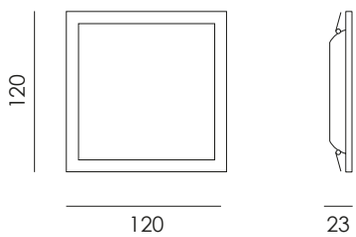

105 x 105

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

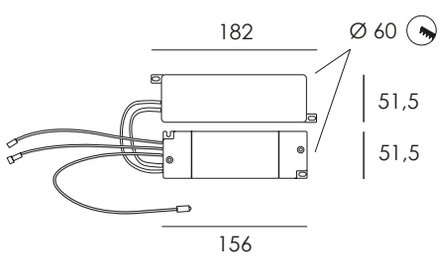

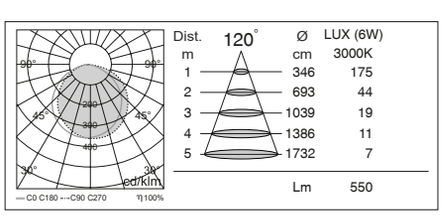

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	6 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5169	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.06** 6 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP44/IP20, 6W, ON/OFF control, frame white color without emergency kit **5169.9B.06.Z1.A**

QUABLÓ 12

CEILING RECESSED

IP44

LED

12W

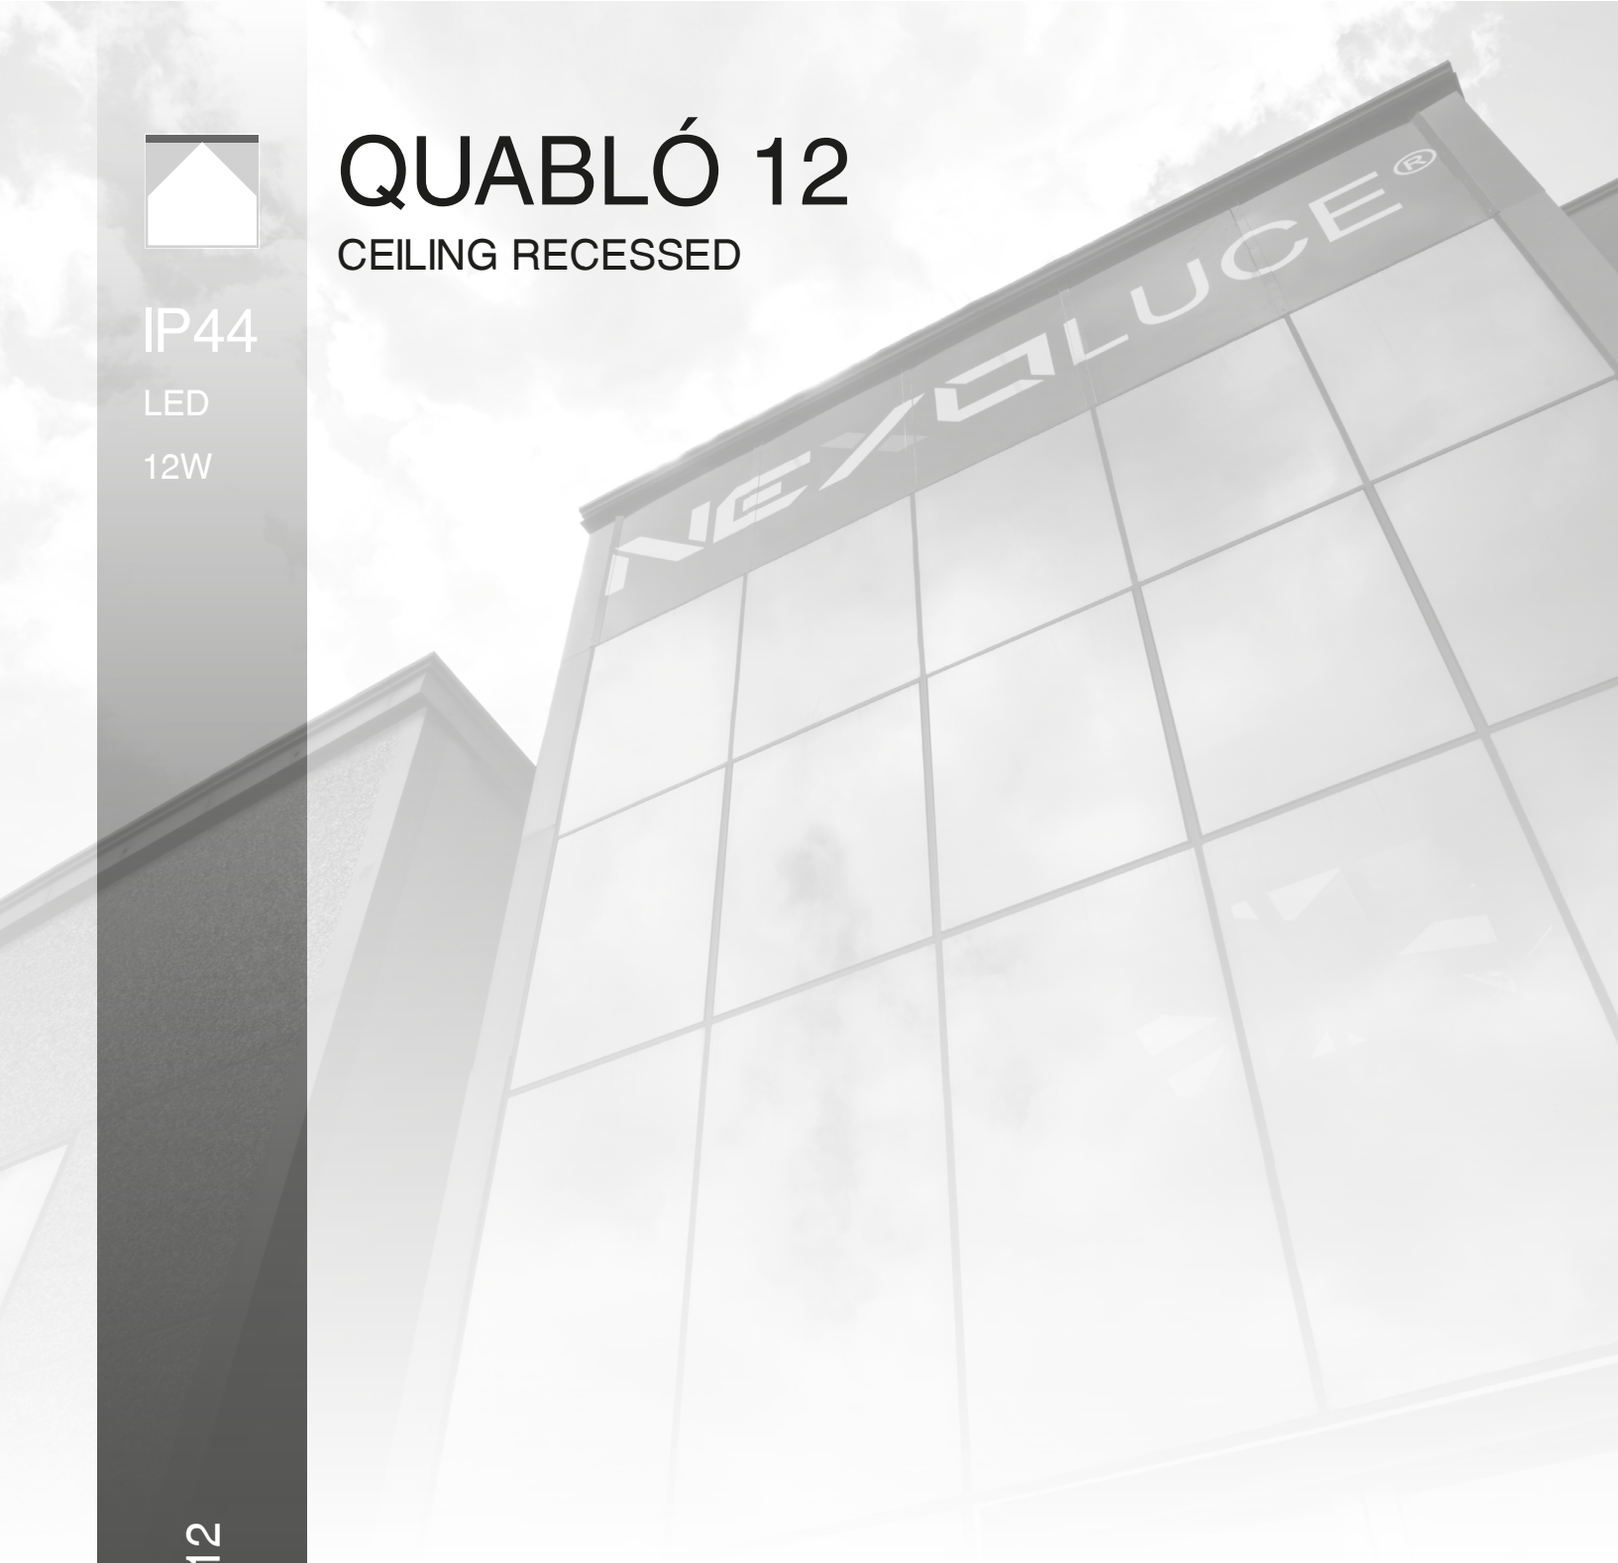

cod. 5171 /// QUABLÓ 12

- *Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

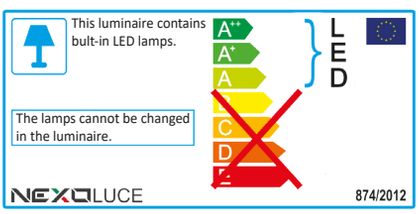



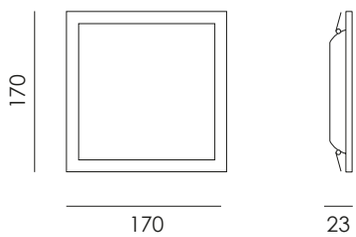

160 x 160

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

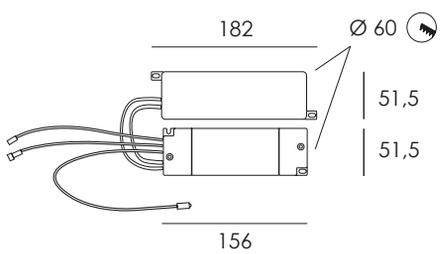

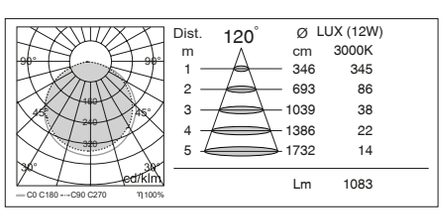

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5171	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.12** 12 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP44/IP20, 12W, ON/OFF control, frame white color without emergency kit **5171.9B.12.Z1.A**

QUABLÓ 18

CEILING RECESSED

IP44

LED

18W

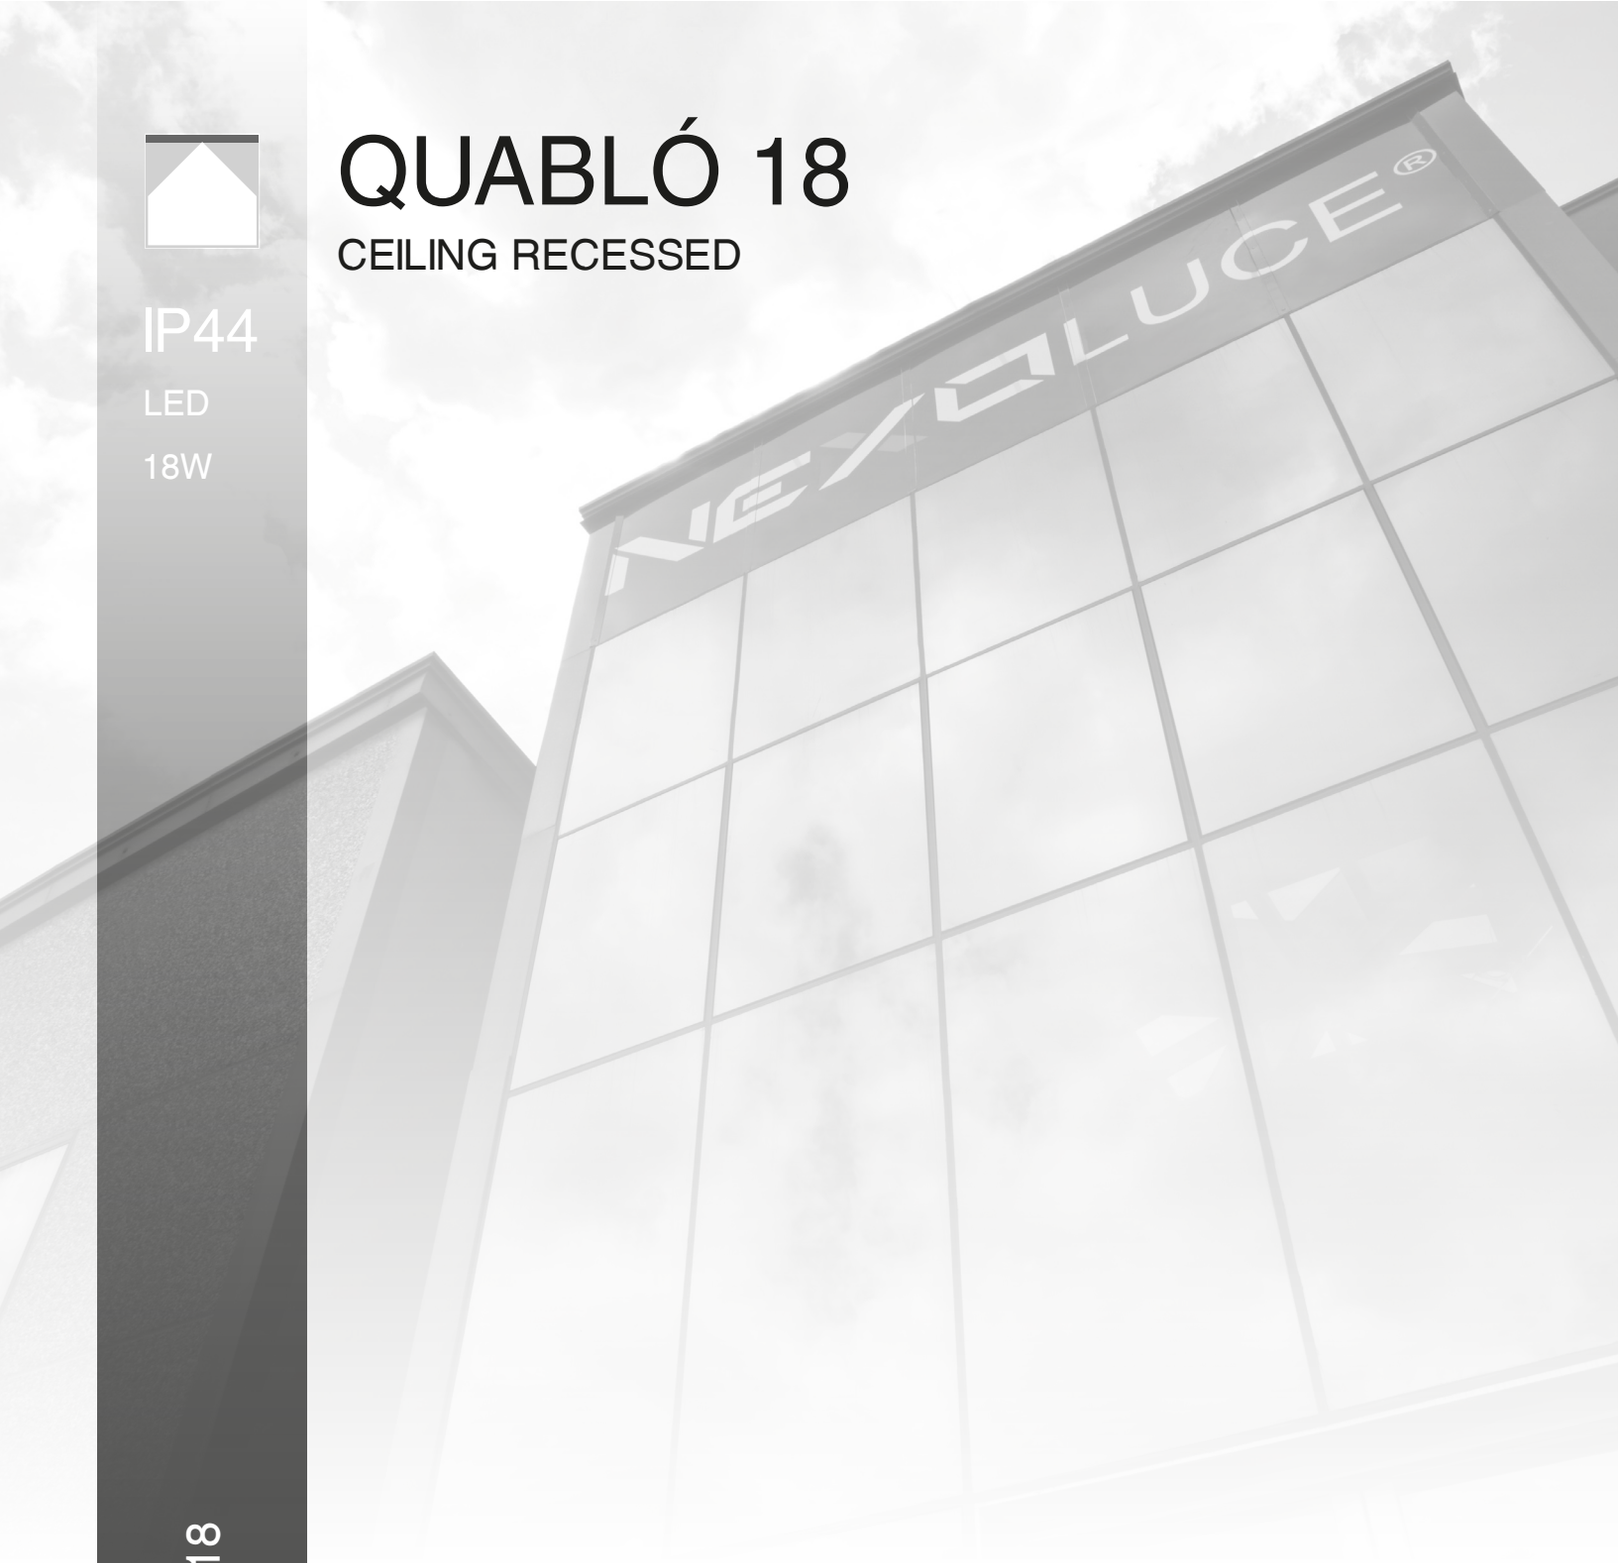

cod. 5173 /// QUABLÓ 18

- *Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

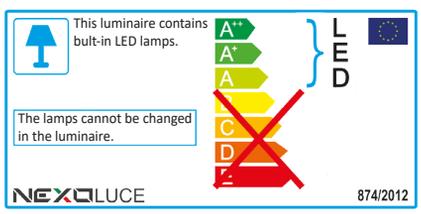



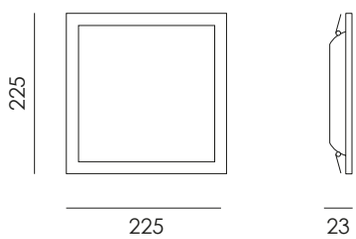

210 x 210

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

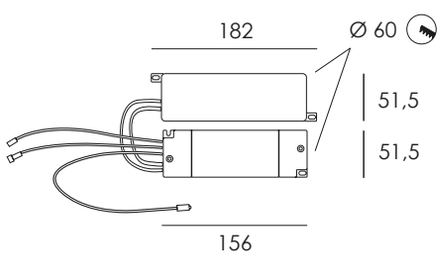

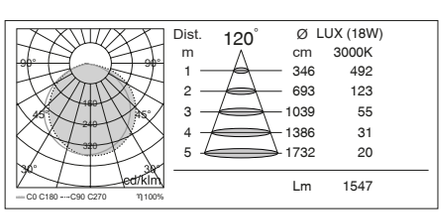

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5173	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.18** 18 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP44/IP20, 18W, ON/OFF control, frame white color without emergency kit **5173.9B.18.Z1.A**

QUABLÓ 24

CEILING RECESSED

IP44

LED

24W

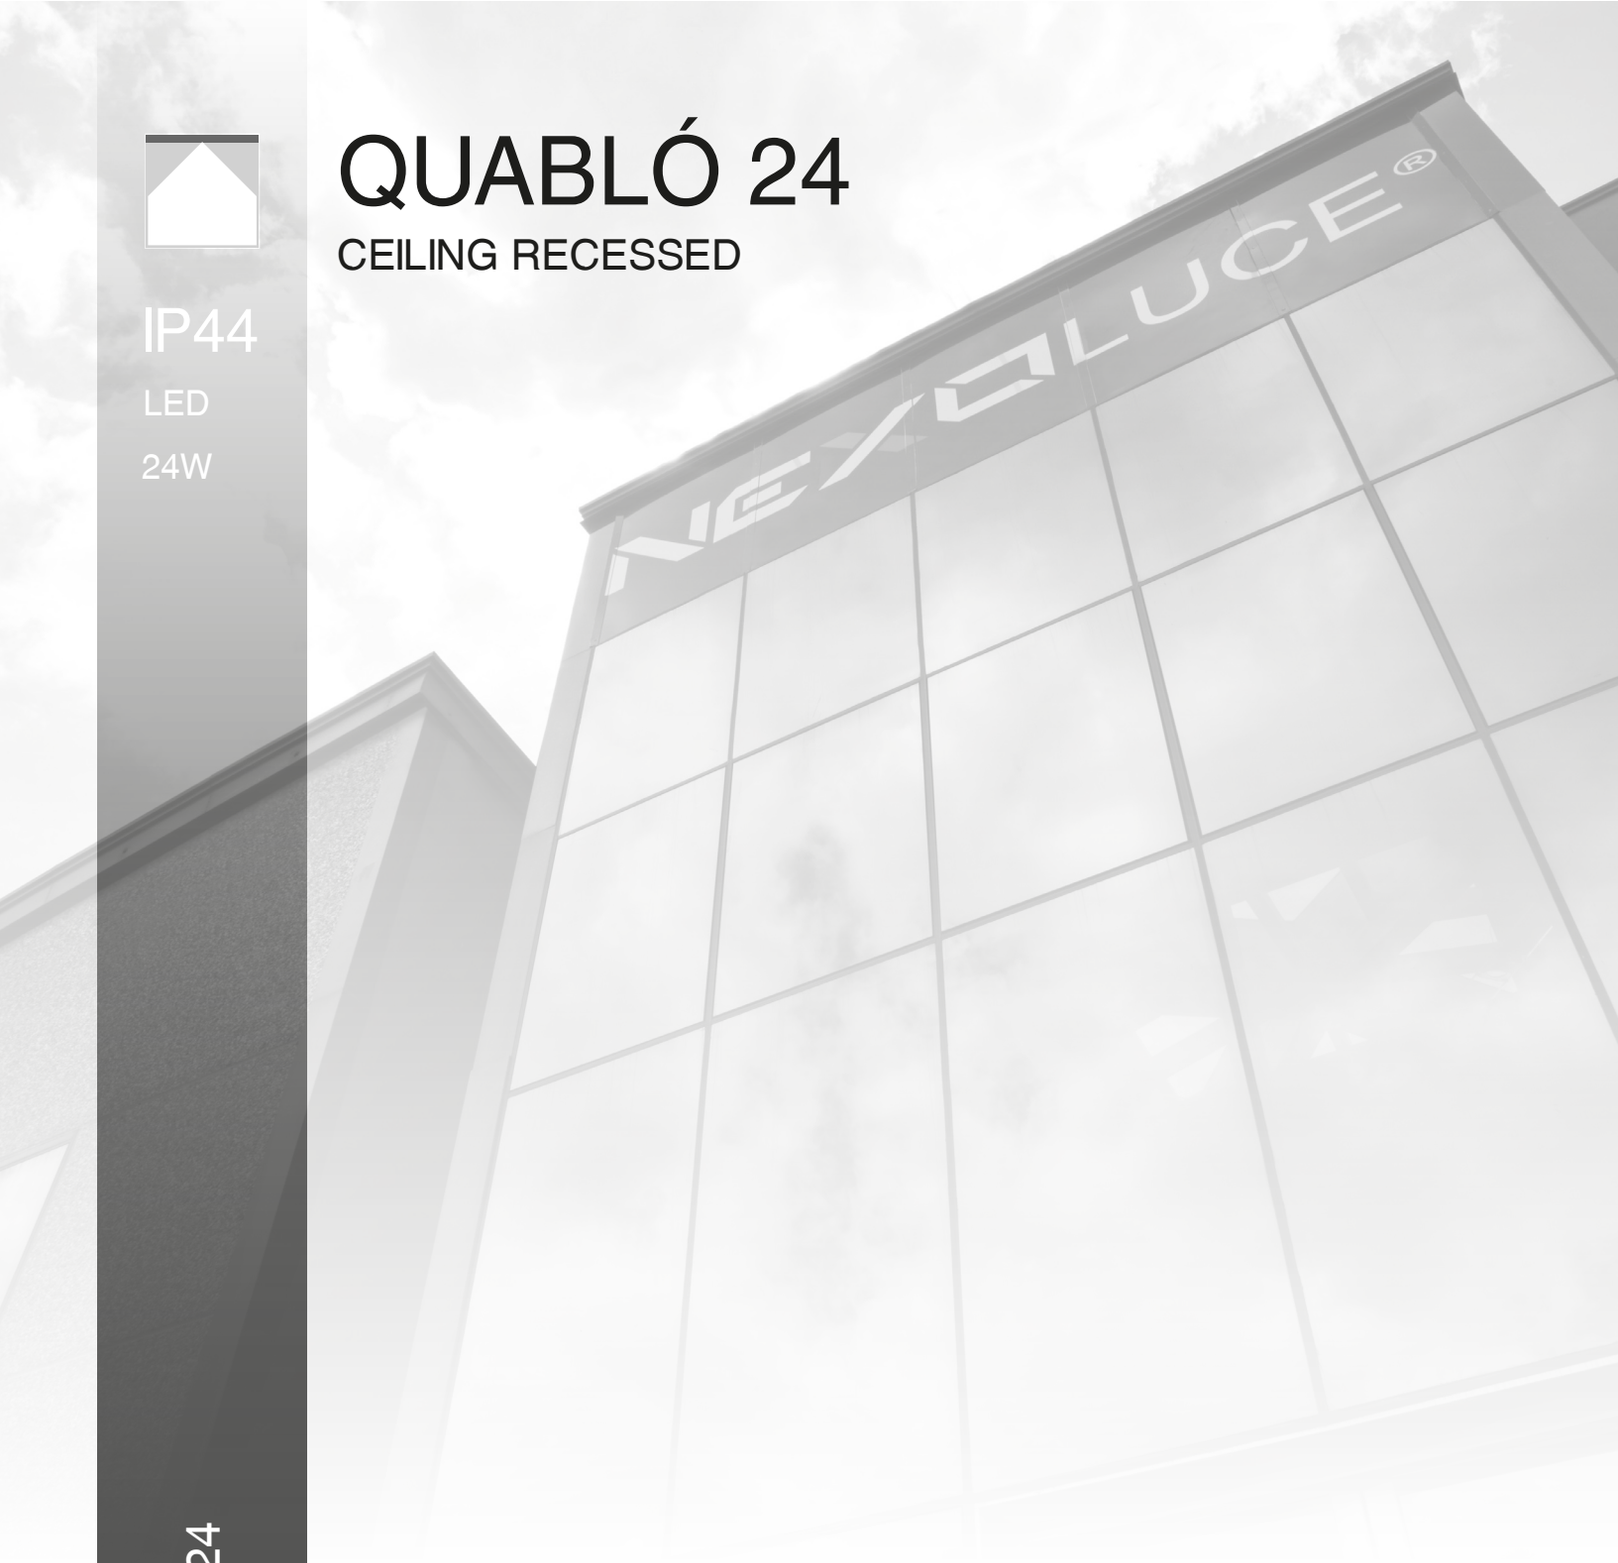

cod. 5175 /// QUABLÓ 24

- *Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

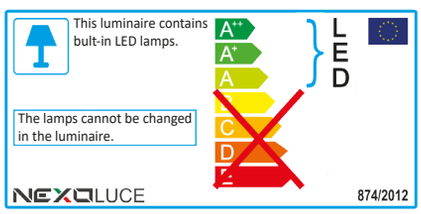

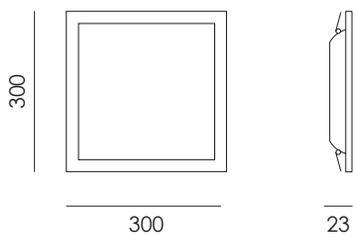



280 x 280

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

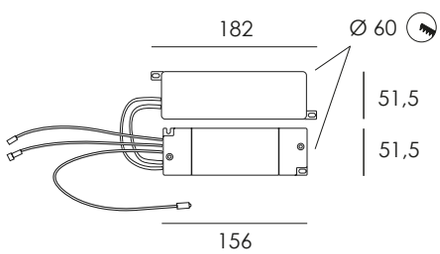

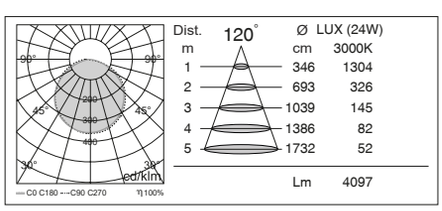

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5175	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.24** 24 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP44/IP20, 24W, ON/OFF control, frame white color without emergency kit **5175.9B.24.Z1.A**

QUABLÓ 30

CEILING RECESSED

IP44

LED

30W

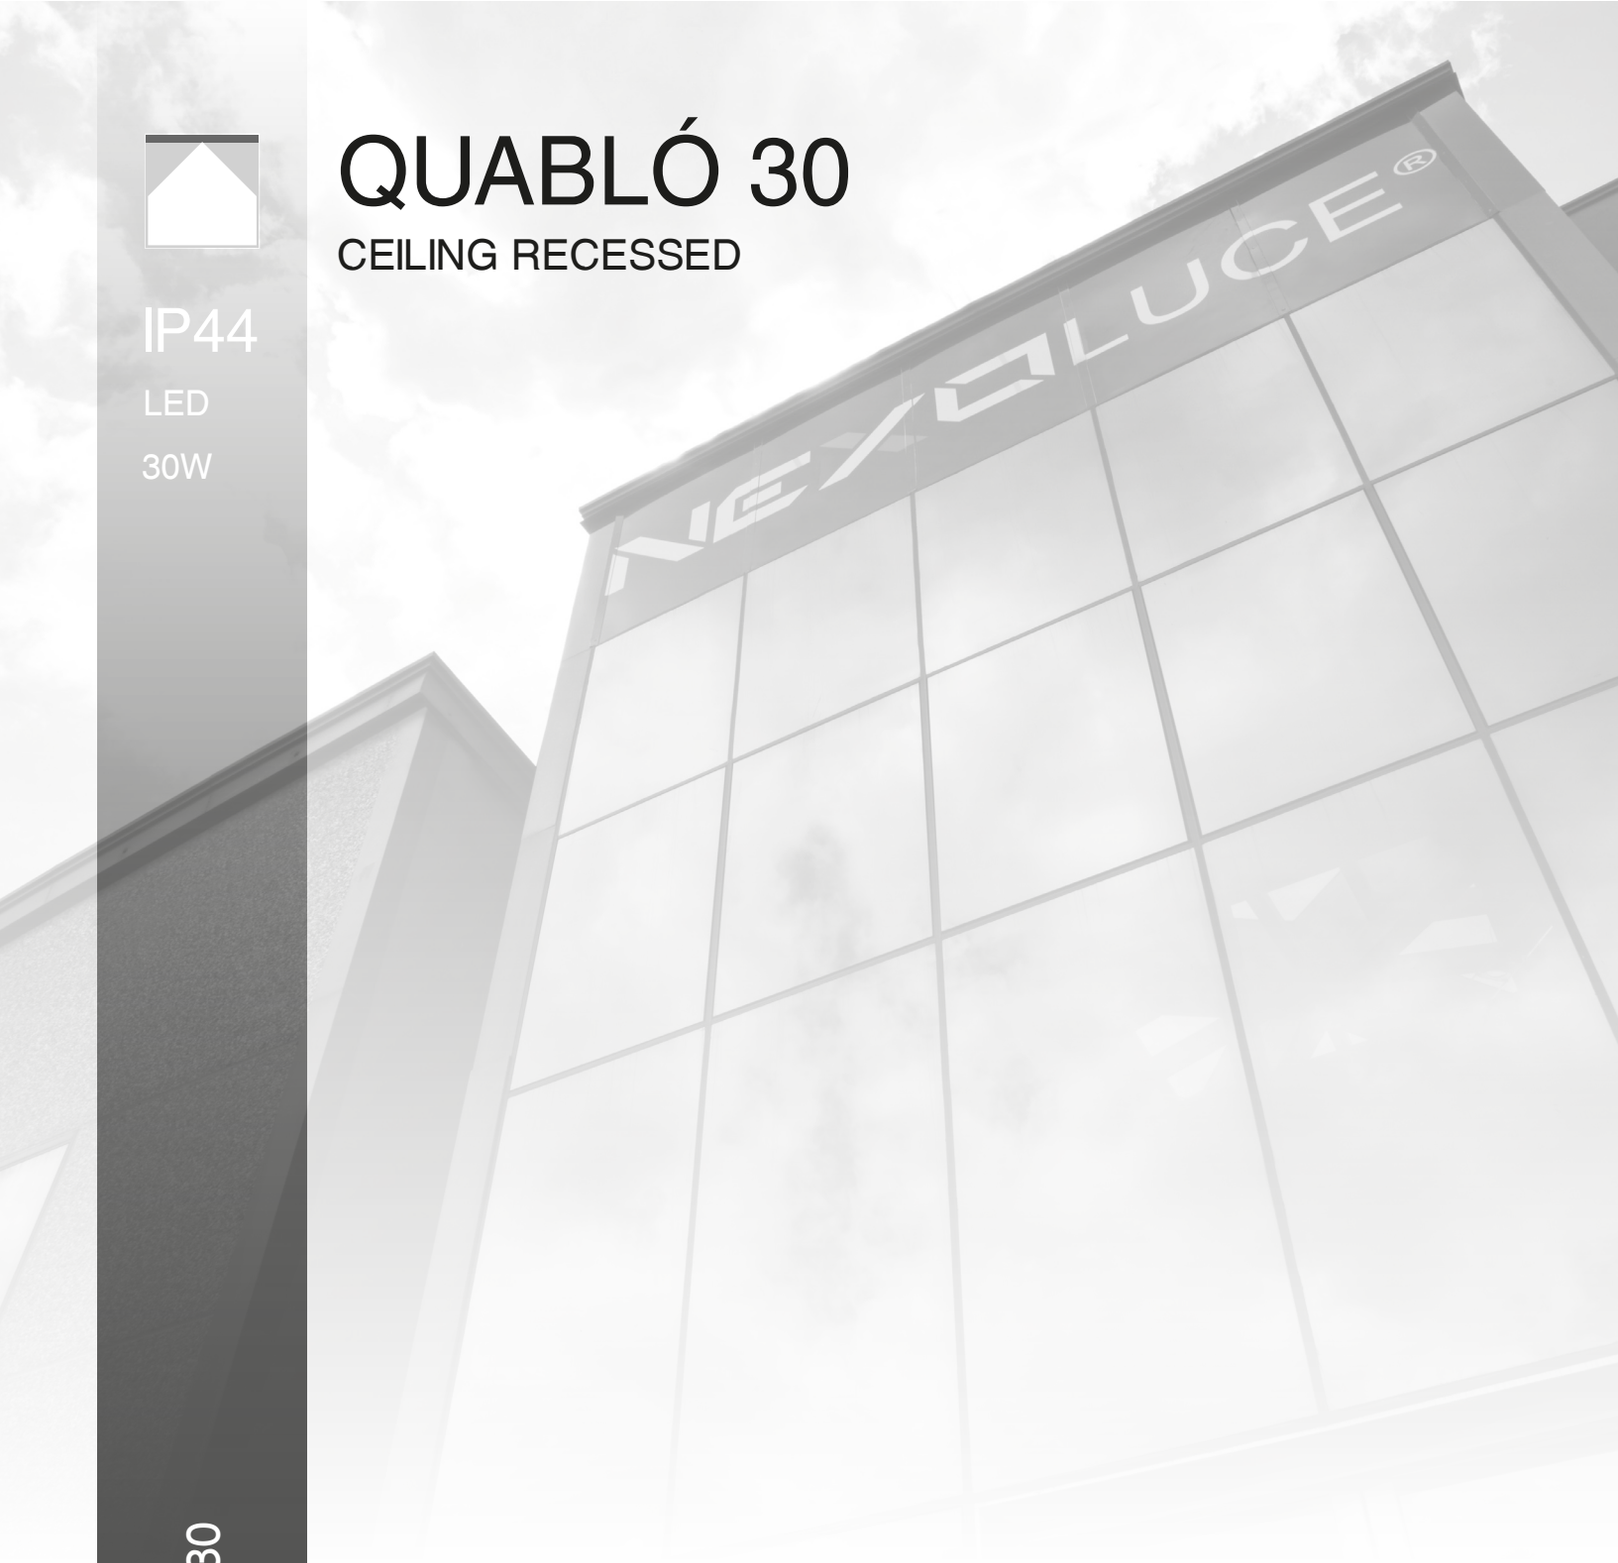

cod. 5176 /// QUABLÓ 30

- *Recessed square LED panel light with two different IP protection degree: IP44 on the frontal/ external surface and IP20 inside*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

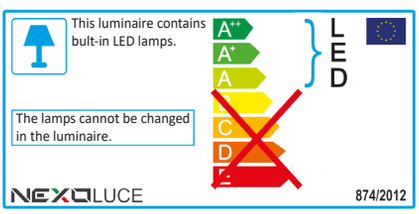



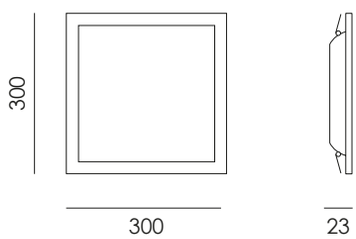

280 x 280

ACCESSORIES

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

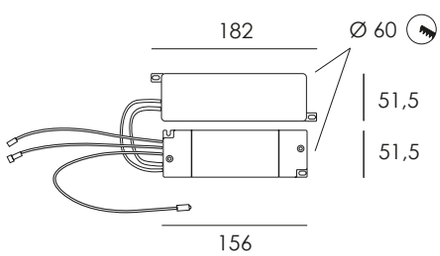

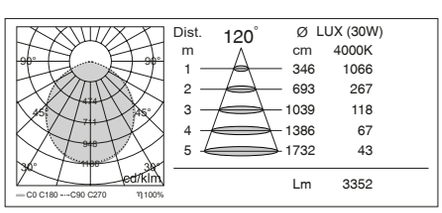

IP44 Front IP20 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5176	**.** WITHOUT EM. KIT	**9** IP44/IP20	**B** 3000 K	**.30** 30 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
			C 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP44/IP20, 30W, ON/OFF control, frame white color without emergency kit **5176.9B.30.Z1.A**

PLAFÓ 30

CEILING RECESSED

IP40

IP65

LED

30W

cod. 5179 /// PLAFÓ 30

- *Recessed square LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

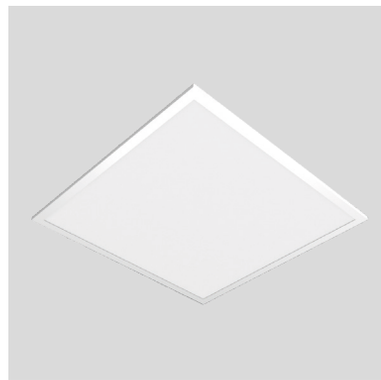

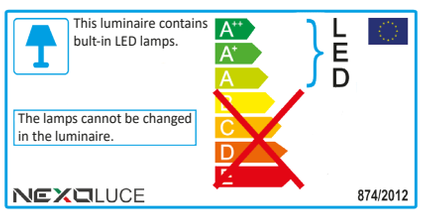





ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0088.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0072.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0071.0**

IP40
IP65 Front IP40 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

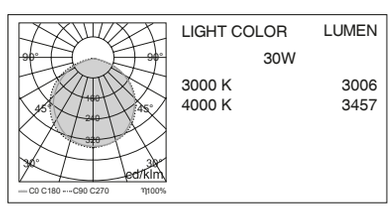

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5179	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.30** 30 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP40, 30W, 120°optic, ON/OFF control, frame white color without emergency kit **5179.2B.30.Z1.A**

IP40

IP65

LED

40W

PLAFÓ 40

CEILING RECESSED

cod. 5180 /// PLAFÓ 40

- *Recessed square LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

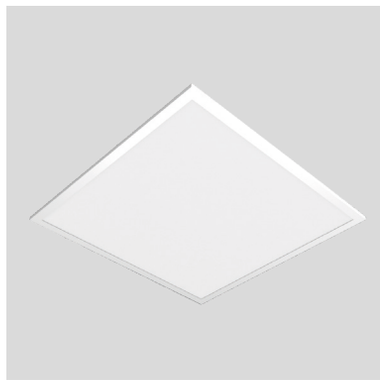

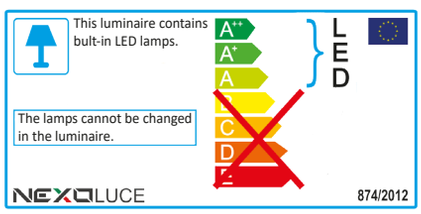





ACCESSORIES

Finishing
WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0088.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0072.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0071.0**

IP40
IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	40 W

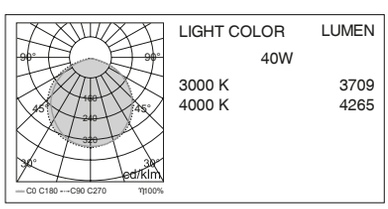

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5180	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.40** 40 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP40, 40W, 120°optic, ON/OFF control, frame white color without emergency kit **5180.2B.40.Z1.A**

IP40

IP65

LED

50W

PLAFÓ 50

CEILING RECESSED

cod. 5181 /// PLAFÓ 50

- *Recessed square LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

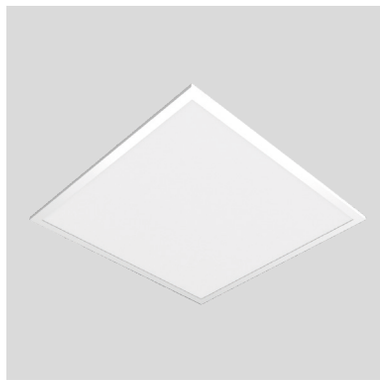

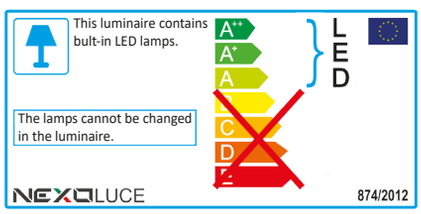





ACCESSORIES

Finishing
WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0088.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0072.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0071.0**

IP40
IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	50 W

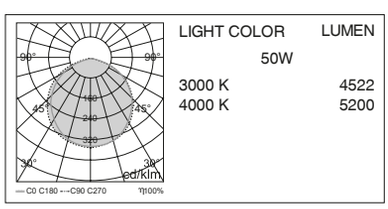

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5181	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.50** 50 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP40, 50W, 120°optic, ON/OFF control, frame white color without emergency kit **5181.2B.50.Z1.A**

PLAFÓ 70

CEILING RECESSED

IP40

IP65

LED

70W

cod. 5182 /// PLAFÓ 70

- *Recessed square LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

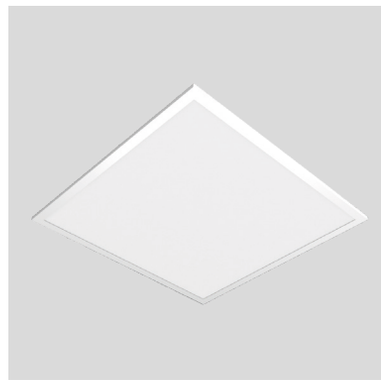

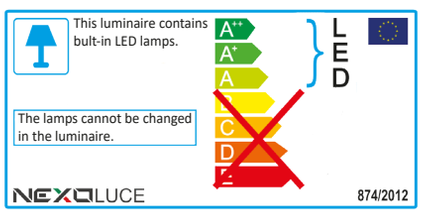





ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0088.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0072.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0071.0**

IP40
IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	70 W

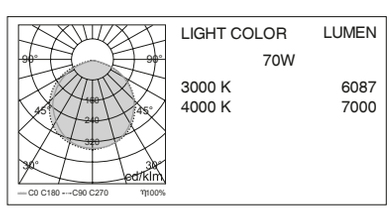

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5182	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.70** 70 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed square panel with warm white light color at 3000K, IP40, 70W, 120°optic, ON/OFF control, frame white color without emergency kit **5182.2B.70.Z1.A**

IP40

IP65

LED

18W

REGOLO S 18

CEILING RECESSED

cod. 5184 /// REGOLO S 18

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

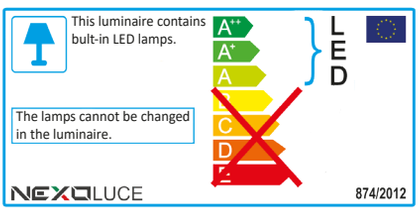





ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0107.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0104.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0103.0**

IP40

IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

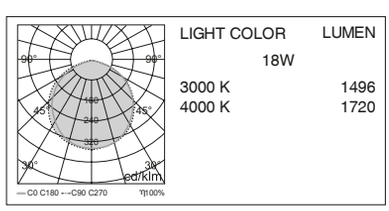

LIGHT COLOR	LUMEN
18W	
3000 K	1496
4000 K	1720

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5184	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.18** 18 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 18W, 120°optic, ON/OFF control, frame white color without emergency kit **5184.2B.18.Z1.A**

IP40

IP65

LED

24W

REGOLO S 24

CEILING RECESSED

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

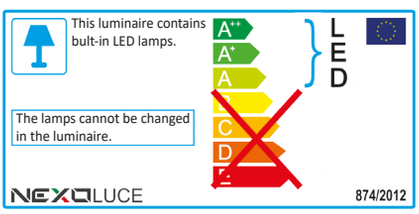





ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0107.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0104.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0103.0**

IP40
IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	24 W



LIGHT COLOR	LUMEN
	24W
3000 K	1725
4000 K	1984

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5185	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.24** 24 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 24W, 120°optic, ON/OFF control, frame white color without emergency kit **5185.2B.24.Z1.A**

IP40

IP65

LED

30W

REGOLO S 30

CEILING RECESSED

cod. 5186 /// REGOLO S 30

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

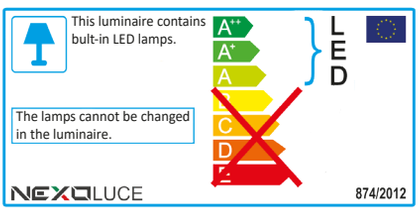





ACCESSORIES

Finishing
WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0107.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0104.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0103.0**

IP40
IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

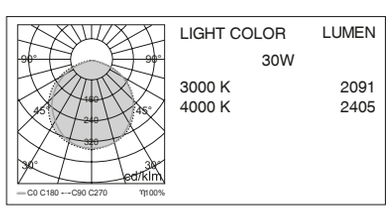

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5186	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.30** 30 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 30W, 120°optic, ON/OFF control, frame white color without emergency kit **5186.2B.30.Z1.A**

IP40

IP65

LED

36W

REGOLO M 36

CEILING RECESSED

cod. 5187 /// REGOLO M 36

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

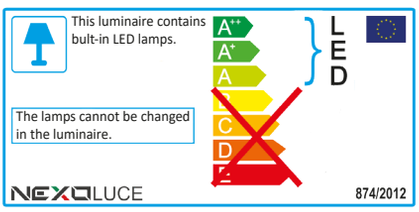



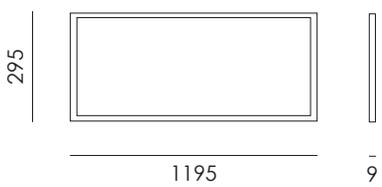

ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0106.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0102.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0101.0**

IP40

IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	36 W

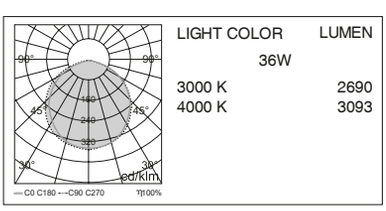

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5187	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.36** 36 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 36W, 120°optic, ON/OFF control, frame white color without emergency kit **5187.2B.36.Z1.A**

IP40

IP65

LED

40W

REGOLO M 40

CEILING RECESSED

cod. 5188 /// REGOLO M 40

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

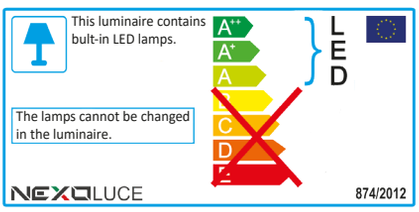



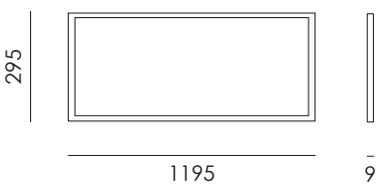

ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0106.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0102.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0101.0**

IP40

IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	40 W



LIGHT COLOR	LUMEN
	40W
3000 K	3237
4000 K	3722

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5188	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.40** 40 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 40W, 120°optic, ON/OFF control, frame white color without emergency kit **5188.2B.40.Z1.A**

IP40

IP65

LED

50W

REGOLO M 50

CEILING RECESSED

cod. 5189 /// REGOLO M 50

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

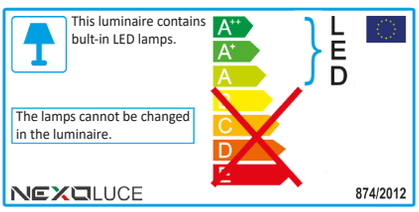



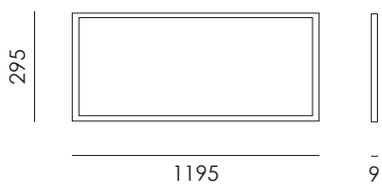

ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0106.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0102.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0101.0**

IP40

IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	50 W

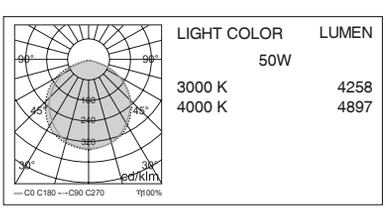

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5189	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.50** 50 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 50W, 120°optic, ON/OFF control, frame white color without emergency kit **5189.2B.50.Z1.A**

REGOLO M 72

CEILING RECESSED

IP40

IP65

LED

72W

cod. 5190 /// REGOLO M 72

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

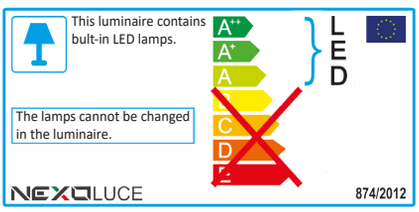



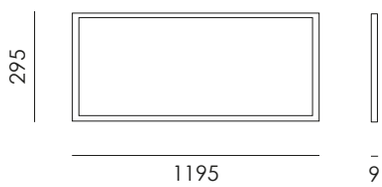

ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0106.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0102.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0101.0**

IP40

IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	72 W

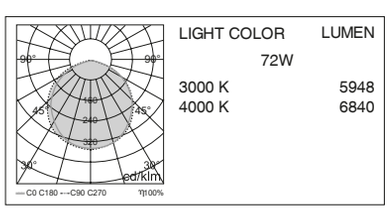

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5190	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.72** 72 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 72W, 120°optic, ON/OFF control, frame white color without emergency kit **5190.2B.72.Z1.A**

IP40

IP65

LED

60W

REGOLO L 60

CEILING RECESSED

cod. 5191 /// REGOLO L 60

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

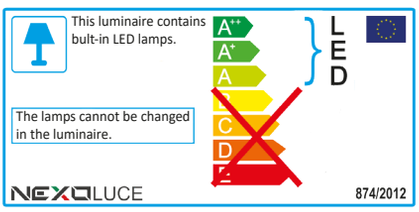



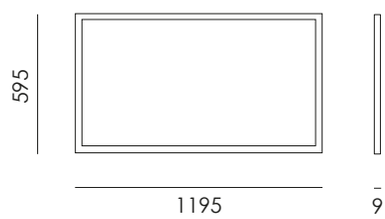

ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0105.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0099.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0098.0**

IP40
IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	60 W



LIGHT COLOR	LUMEN
60W	
3000 K	4486
4000 K	5158

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5191	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.60** 60 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 60W, 120°optic, ON/OFF control, frame white color without emergency kit **5191.2B.60.Z1.A**

REGOLO L 72

CEILING RECESSED

IP40

IP65

LED

72W

cod. 5192 /// REGOLO L 72

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

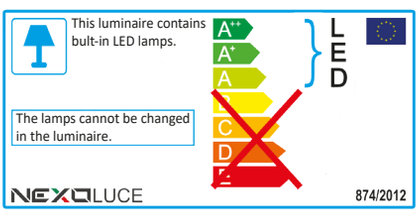



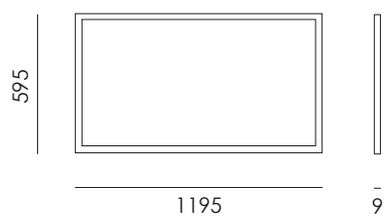

ACCESSORIES

Finishing

WHITE



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0105.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0099.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0098.0**

IP40

IP65Front IP40Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	72 W

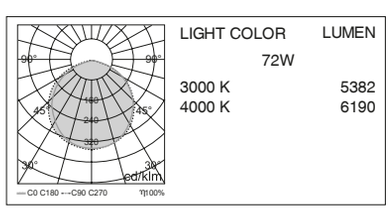

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5192	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.72** 72 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 72W, 120°optic, ON/OFF control, frame white color without emergency kit **5192.2B.72.Z1.A**

IP40

IP65

LED

84W

REGOLO L 84

CEILING RECESSED

cod. 5193 /// REGOLO L 84

- *Recessed rectangular LED panel light for suspended ceiling installation*
- *Aluminium body*
- *Opal plastic diffuser*
- *Available with recessed frame kit for plasterboard or with suspended mounting kit or with surface mounting kit*
- *Available with 3 hours emergency kit*
- *Power supply included (Class 2 for IP40, Class 1 for IP65)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

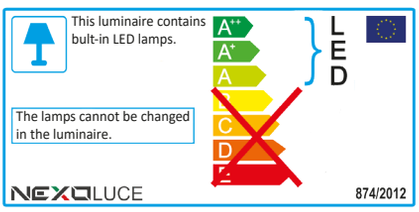



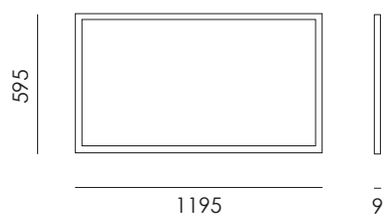

ACCESSORIES

Finishing



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code / *codice:* **015.0013.0**



RECESSED FRAME KIT FOR PLASTERBOARD / *CORNICE PER CARTONGESSO*
code / *codice:* **003.0105.A**



SUSPENDED MOUNTING KIT 3mt / *KIT CAVI SOSPENSIONE 3mt*
code / *codice:* **003.0099.0**



SURFACE MOUNTING KIT / *CORNICE A PLAFONE*
code / *codice:* **003.0098.0**

IP40
IP65 Front IP40 Back

Lamp	Input	Power
LED	220/240Vac 50/60Hz	84 W



LIGHT COLOR	LUMEN
84W	
3000 K	6032
4000 K	6937

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5193	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000 K	**.84** 84 W	**.Z** 120°	**1** ON / OFF	**.A** WHITE
		C IP65/IP40	**C** 4000 K				

CODE EXAMPLE:
Recessed rectangular panel with warm white light color at 3000K, IP40, 84W, 120°optic, ON/OFF control, frame white color without emergency kit **5193.2B.84.Z1.A**

PIANO

CEILING RECESSED

IP40

LED

30W

cod. 5441 /// PIANO

- *Recessed LED linear lamp for indoor installation*
- *Aluminium body*
- *PMMA opal diffuser*
- *Equipped with springs for installation*
- *External power supply included*
- *Available with 3 hours emergency kit in a separate box*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)*

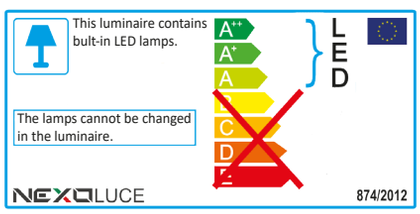



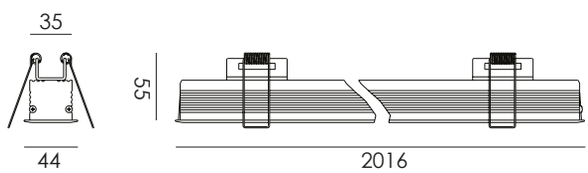

2013 x 38

Finishing

WHITE

ACCESSORIES

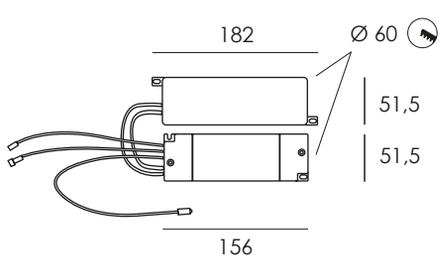

IP40

Lamp	Input	Power
LED	220/240Vac 50/60Hz	30 W

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
code: **015.0013.0**

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5441	**.** WITHOUT EM. KIT	**2** IP40	**B** 3000K	**.30** 30 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000K				

CODE EXAMPLE:
Recessed ceiling light with stripled, IP40, 30W, opal diffuser, ON/OFF control, frame white color without emergency kit **5441.2B.30AD1.A**





IP20

LED

3W

BANDIERA Q

WALL RECESSED

cod. 5371 /// BANDIERA Q

- *Wall adjustable reading light*
- *Stainless steel body*
- *Adjustable body position*

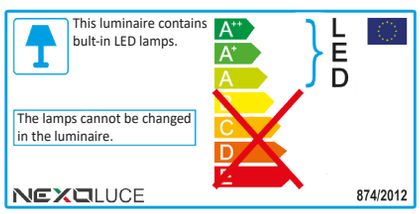



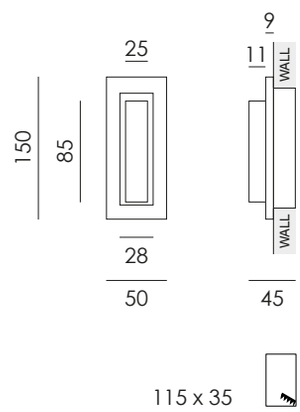



IP20

Lamp	Input	Power
LED	220/240Vac 50/60Hz	3 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5371	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.03** 3 W	**AS** PRISMATIC DIFFUSER	**1** ON/OFF	**.D** BLACK
			C 4000 K				**.S** BRUSHED CHROME

CODE EXAMPLE:
Reading LED light with warm white light color at 3000K, IP20, 3W, prismatic diffuser, ON/OFF control, frame brushed chrome color without emergency kit **5371.1B.03AS1.S**

SEGNO

WALL RECESSED

IP65

E27

MAX 20W

cod. 5245 /// SEGNO

- *Recessed wall light*
- *Die-cast aluminium body*
- *Polyester powder paint*
- *Resistant to corrosion*
- *Polycarbonate opal cover*
- *Stainless steel external screws*
- *Plastic housing for installation included*

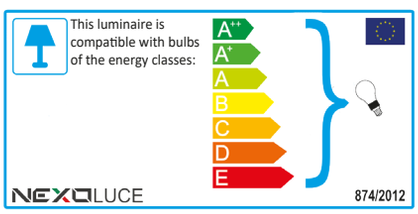

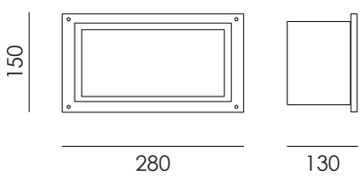

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 20 W

LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5245	**.** WITHOUT EM. KIT	**5** IP65	**Z** E27	**M20** MAX 20 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.B** GREY
							.C DARK GREY
							.D BLACK

CODE EXAMPLE:
Recessed wall light with E27 lamp, IP65, MAX 20W, opal diffuser, ON/OFF control, frame black color without emergency kit **5245.5ZM20AD1.D**

SEGNO Q

WALL RECESSED

IP65

E27

MAX 20W

cod. 5248 /// SEGNO Q

- *Recessed wall light*
- *Die-cast aluminium body*
- *Polyester powder paint*
- *Resistant to corrosion*
- *Polycarbonate clear cover*
- *Stainless steel external screws*
- *Plastic housing for installation included*

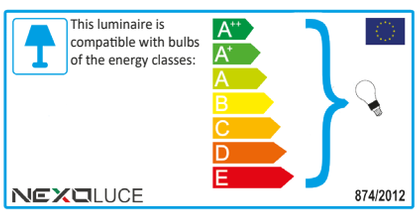

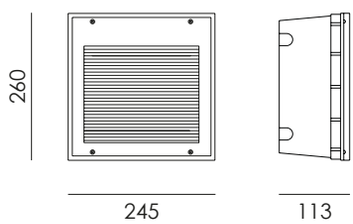

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 20 W

LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5248	**.** WITHOUT EM. KIT	**5** IP65	**Z** E27	**M20** MAX 20 W	**AX** CLEAR DIFFUSER	**1** ON / OFF	**.B** GREY
							.D BLACK

CODE EXAMPLE:
Recessed wall light with E27 lamp, IP65, MAX 20W, clear diffuser, ON/OFF control, frame grey color without emergency kit **5248.5ZM20AX1.B**

SEGNO M

WALL RECESSED

IP65

LED

4,5W

cod. 5467 /// SEGNO M

- *Wall recessed LED projector for indoor and outdoor use*
- *Single asymmetric emission*
- *Die-cast aluminium body*
- *Internal satin glass diffuser*
- *EPDM gasket*
- *Internal power supply*
- *Standard recessed box 503 included*

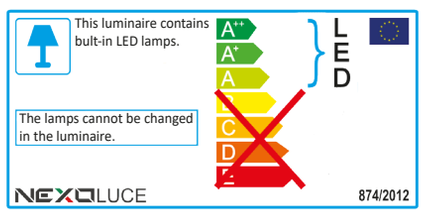





IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	4,5 W

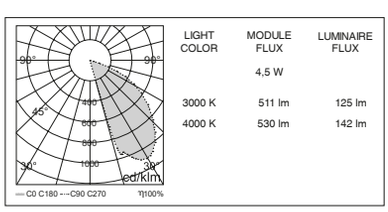

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5467	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**A45** 4,5 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K				**.B** GREY
							.C DARK GREY

CODE EXAMPLE:
Wall recessed LED projector with light color at 3000K, IP65, 4,5W, opal diffuser, ON/OFF control, frame dark grey color without emergency kit **5467.5BA45AD1.C**

SURFACE

SPECCHIO

SURFACE

IP44

LED

3.6W

cod. 2154 /// SPECCHIO

cod. 2154 /// SPECCHIO

- *Wall mirror light*
- *Aluminium and plastic body*
- *Plastic diffuser*

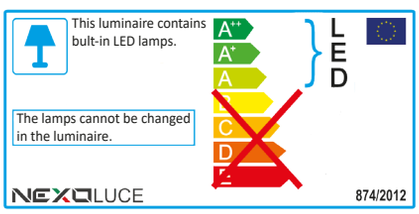

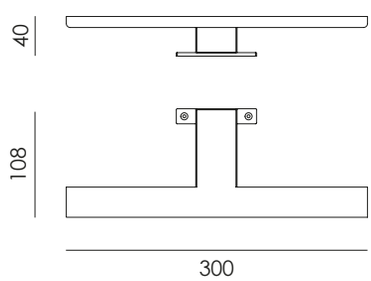



IP44

Lamp	Input	Power
LED	220/240Vac 50/60Hz	3.6 W

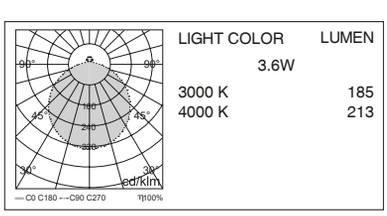

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
2154	**.** WITHOUT EM. KIT	**3** IP44	**B** 3000 K	**.03** 3.6 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K				**.J** CHROME

CODE EXAMPLE:
Wall mirror light with warm white light color at 3000K, IP44, 3.6W, opal diffuser, ON/OFF control, frame white color without emergency kit **2154.3B.03AD1.A**

SPECCHIO S

SURFACE

IP44

LED

12W

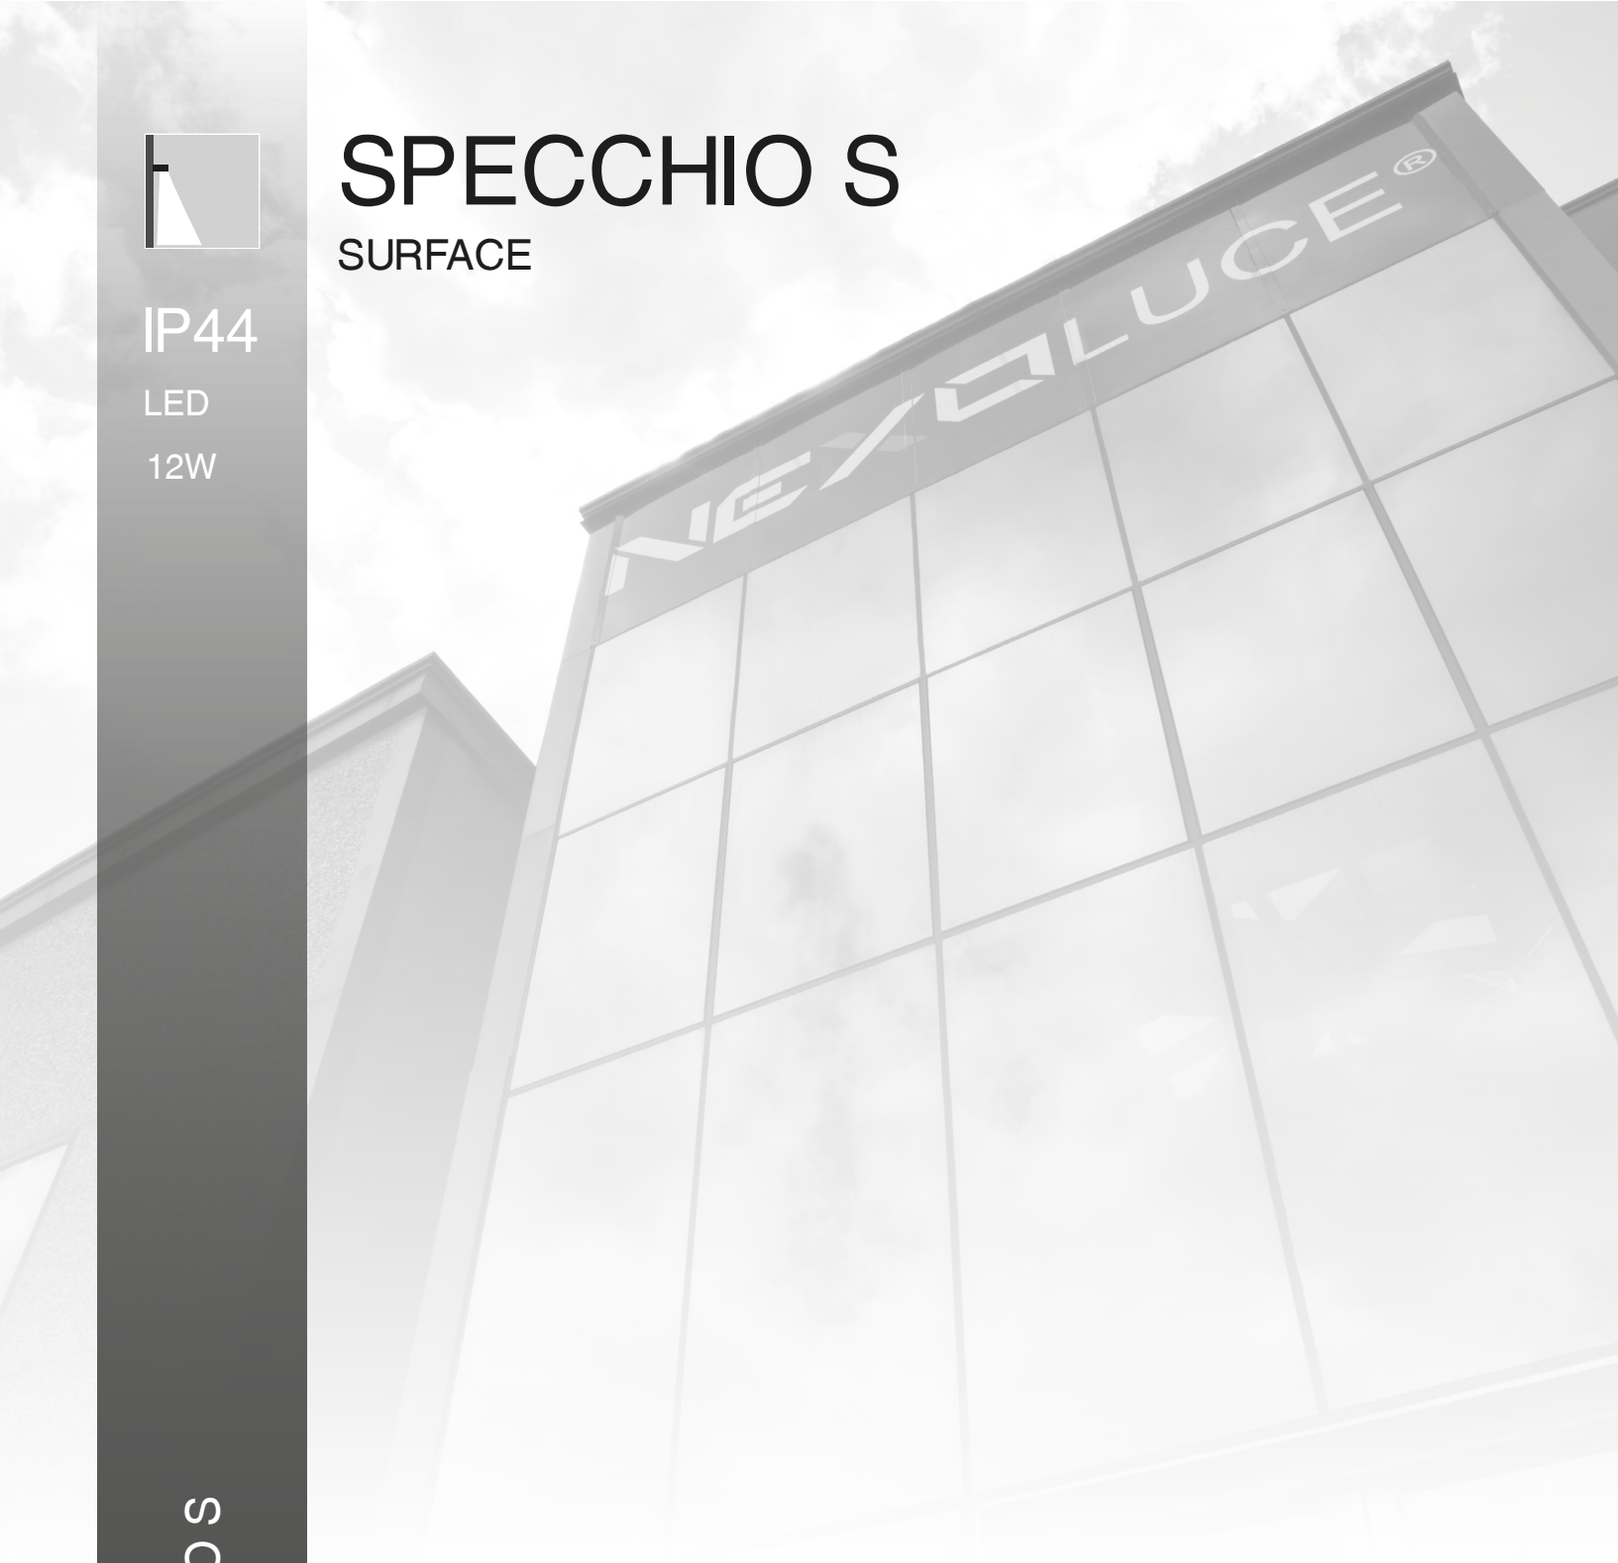

cod. 5031 /// SPECCHIO S

cod. 5031 /// SPECCHIO S

- *Wall mirror light*
- *Aluminium and plastic body*
- *Plastic diffuser*

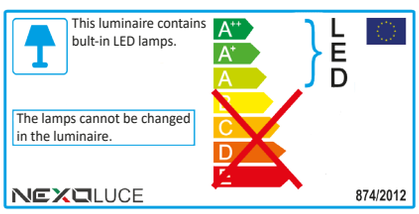

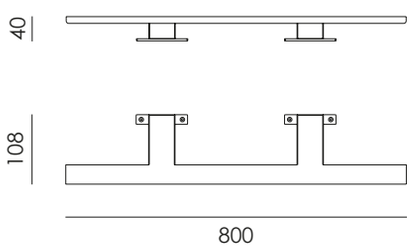



IP44

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

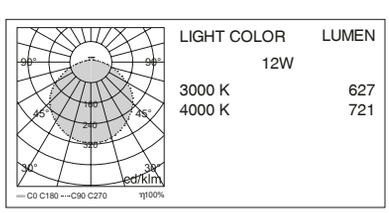

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5031	**.** WITHOUT EM. KIT	**3** IP44	**B** 3000 K	**.12** 12 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K				**.J** CHROME

CODE EXAMPLE:
Wall mirror light with warm white light color at 3000K, IP44, 12W, opal diffuser, ON/OFF control, frame white color without emergency kit **5031.3B.12AD1.A**

SPECCHIO 4

SURFACE

IP44

LED

5W

cod. 5052 /// SPECCHIO 4

cod. 5052 /// SPECCHIO 4

- *Wall mirror light*
- *Metal body*
- *Plastic diffuser*

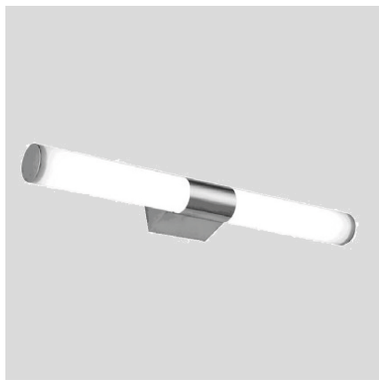

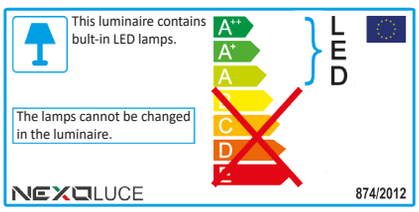



IP44

Lamp	Input	Power
LED	220/240Vac 50/60Hz	5 W

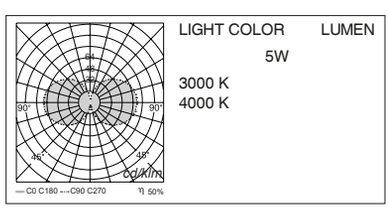

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5052	**.** WITHOUT EM. KIT	**3** IP44	**B** 3000 K	**.05** 5 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.J** CHROME
			C 4000 K				

CODE EXAMPLE:
Wall mirror light with warm white light color at 3000K, IP44, 5W, opal diffuser, ON/OFF control, frame chrome color without emergency kit **5052.3B.05AD1.J**

DOPPIO FASCIO

SURFACE

IP65

E27

MAX 20W

cod. 5089 /// DOPPIO FASCIO

cod. 5089 /// DOPPIO FASCIO

- *Wall mounted light*
- *Double emission*
- *Die-cast painted aluminium housing*
- *Tempered safety glass diffuser*
- *Anodized aluminium reflector*

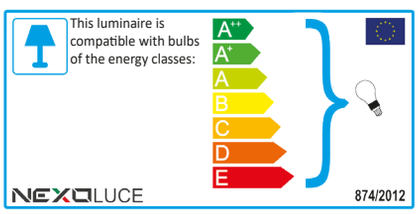



IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 20 W

LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5089	**.** WITHOUT EM. KIT	**5** IP65	**Z** E27	**M20** MAX 20 W	**AG** FROSTED DIFFUSER	**1** ON / OFF	**.B** GREY
					AX CLEAR DIFFUSER		**.D** BLACK

CODE EXAMPLE:
Wall mounted light with E27 lamp, IP65, MAX 20W, frosted diffuser, ON/OFF control, frame grey color without emergency kit **5089.5ZM20AG1.B**

FASCIO VERTICALE

SURFACE

IP65

2XE27

MAX 60W

cod. 5090 /// FASCIO VERTICALE

cod. 5090 /// FASCIO VERTICALE

- *Wall mounted light*
- *Double emission*
- *Metal body*
- *Tempered safety glass diffuser*

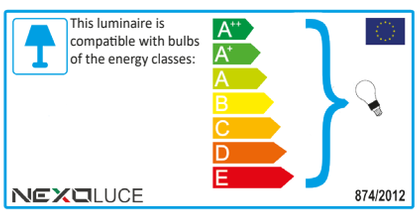

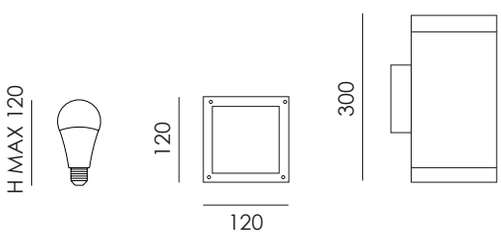

Finishing
DARK GREY

Finishing
SILVER

IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	30 W

LAMP NOT INCLUDED

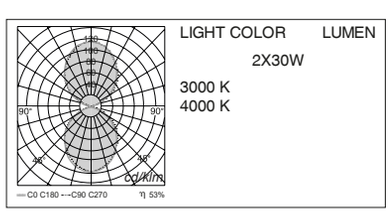

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5090	**.** WITHOUT EM. KIT	**5** IP65	**P** 2XE27	**M60** MAX 60W	**AG** FROSTED DIFFUSER	**1** ON / OFF	**.C** DARK GREY
							AE SILVER

CODE EXAMPLE:
Wall mounted light IP65, 2XE27, MAX 60W, frosted diffuser, ON/OFF control, frame dark grey color without emergency kit **5090.5PM60AG1.C**

BLOCCHETTO

SURFACE

IP20

LED

22W

cod. 5088 /// BLOCCHETTO

cod. 5088 /// BLOCCHETTO

- *Wall mounted light*
- *Double emission*
- *Aluminium body*
- *Tempered safety glass diffuser*
- *Stainless steel screws*

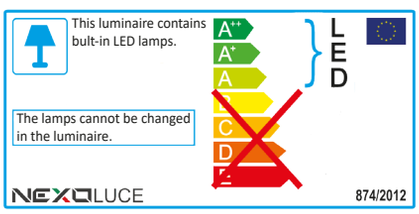

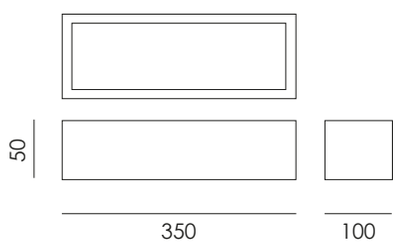

IP20

Lamp	Input	Power
LED	220/240Vac 50/60Hz	22 W

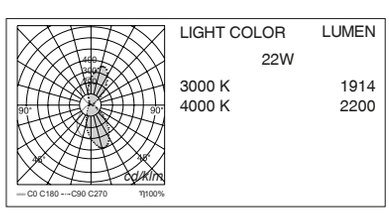

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5088	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.22** 22 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K				**.D** BLACK

CODE EXAMPLE:
Wall mounted light with warm white light color at 3000K, IP20, 22W, opal diffuser, ON/OFF control, frame white color without emergency kit **5088.1B.22AD1.A**

BLOCCHETTO IP65

SURFACE

IP65

LED

20W

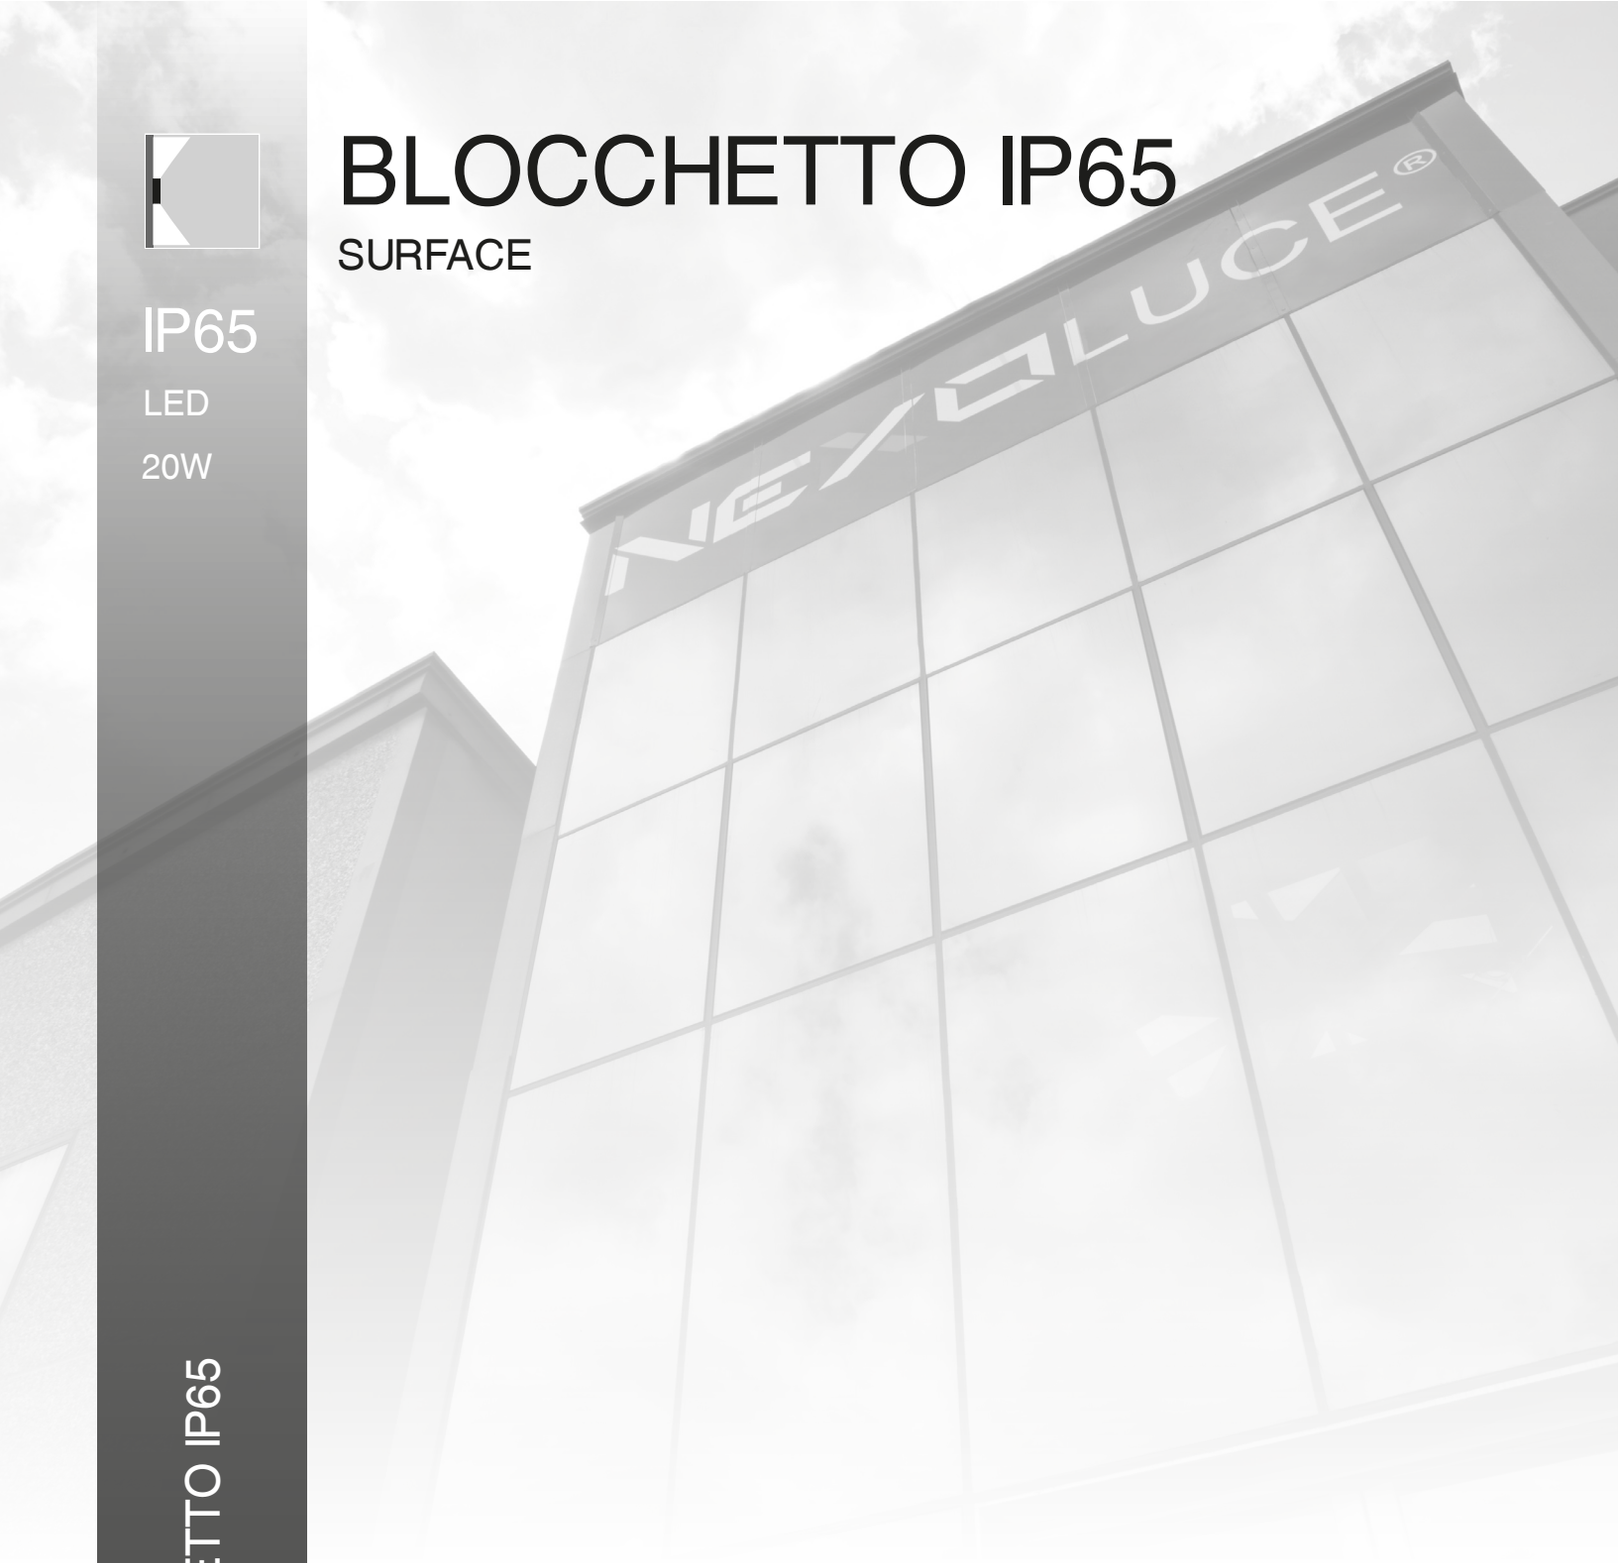

cod. 5466 /// BLOCCHETTO IP65

cod. 5466 /// BLOCCHETTO IP65

- *Wall mounted LED projector*
- *Double emission*
- *Die-cast aluminium body*
- *Internally painted glass diffuser*
- *Aluminum reflector*
- *Silicone gasket*
- *Internal power supply*

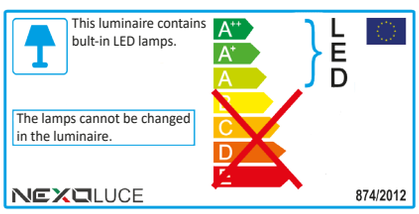





IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	20 W

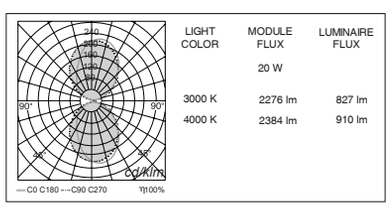

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5466	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.20** 20 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K				**.B** GREY
							.C DARK GREY

CODE EXAMPLE:
Wall mounted LED projector with light color at 3000K, IP65, 20W, opal diffuser, ON/OFF control, frame dark grey color without emergency kit **5466.5B.20AD1.C**

BLOCCHETTO S IP65

SURFACE

IP65

LED

11W

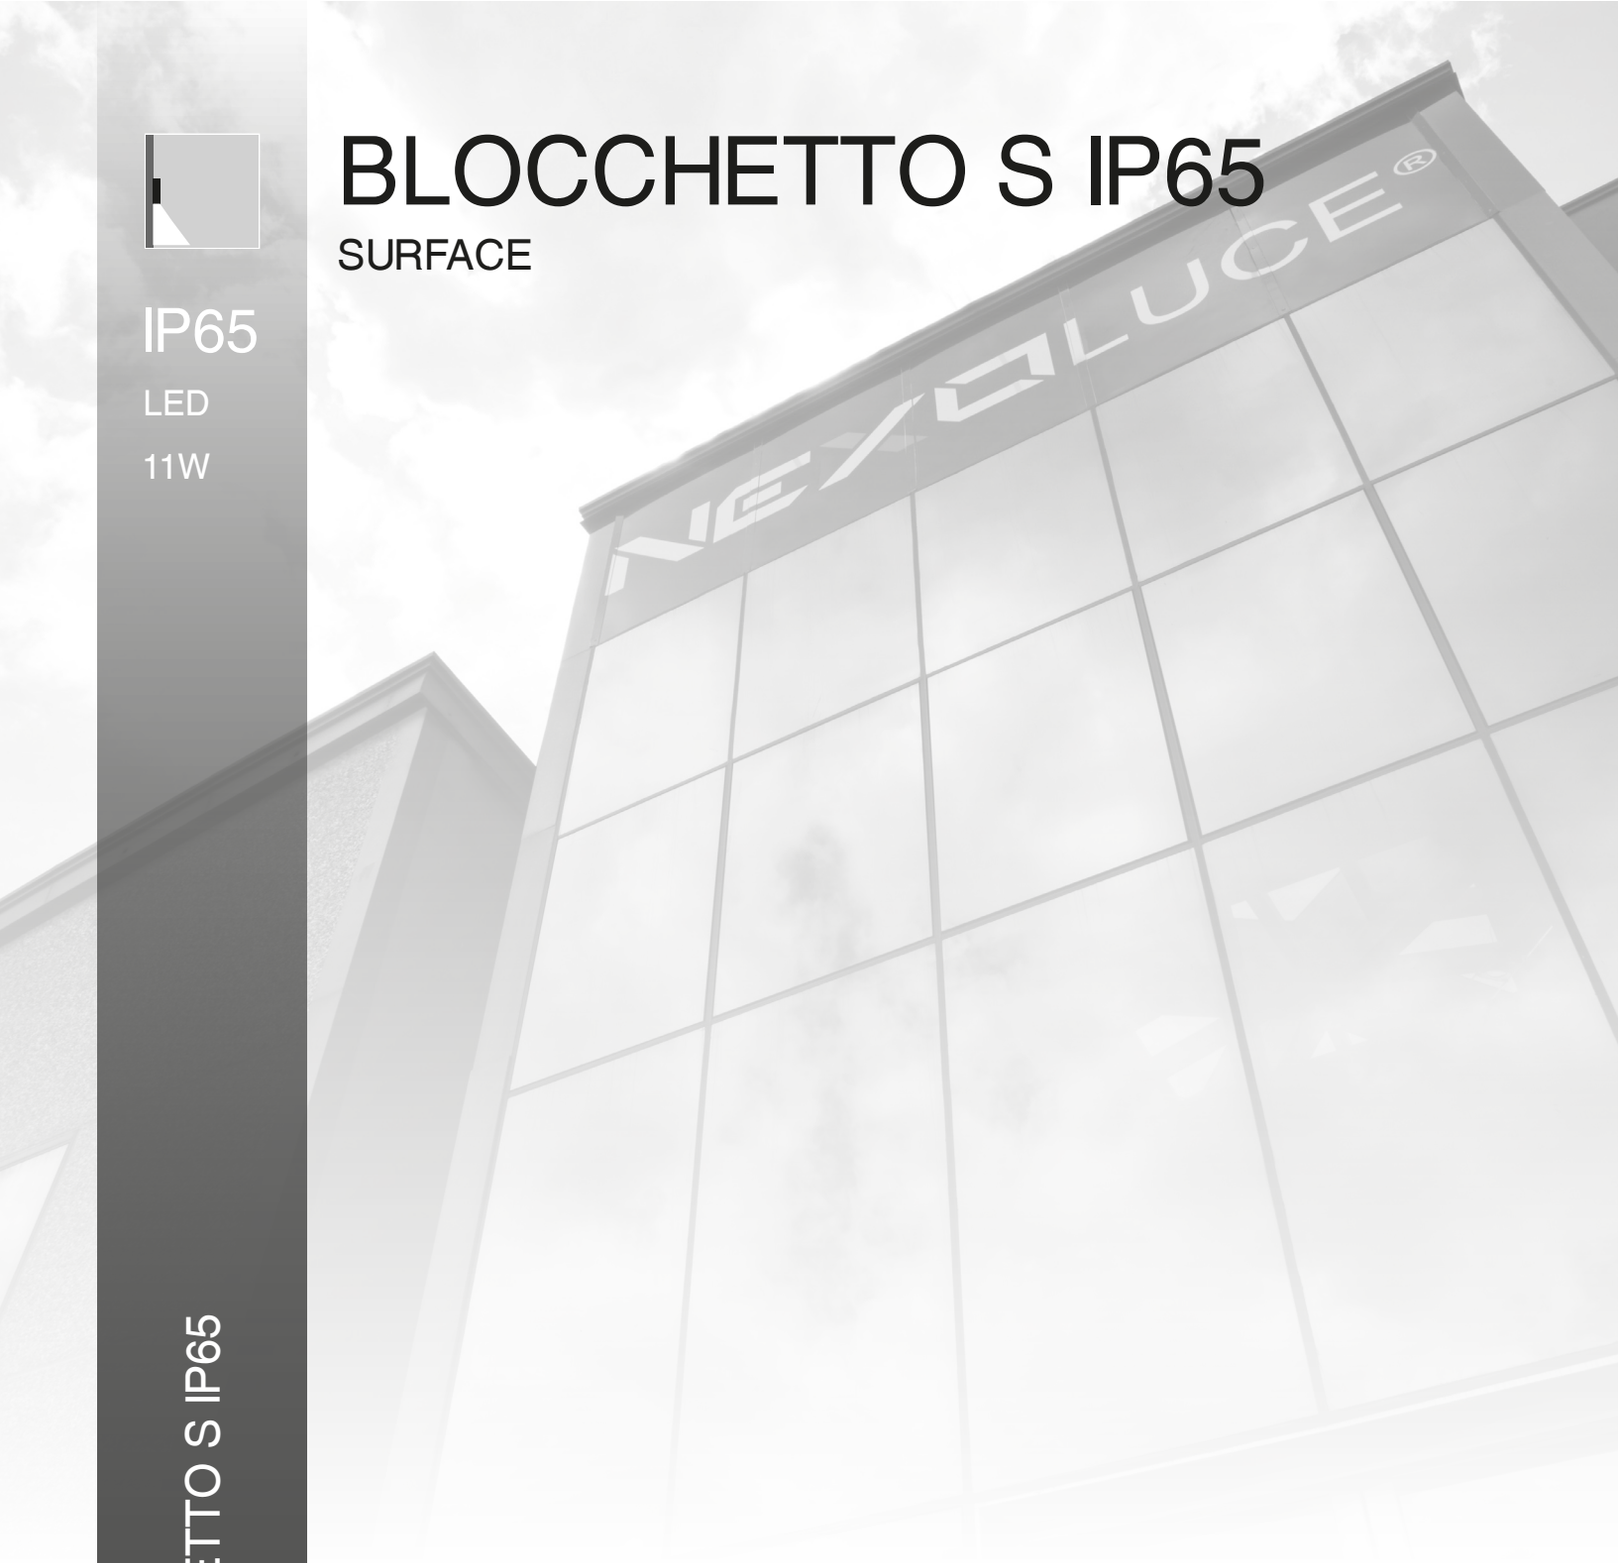

cod. 5475 /// BLOCCHETTO S IP65

cod. 5475 /// BLOCCHETTO S IP65

- *Wall mounted LED projector*
- *Single emission*
- *Die-cast aluminium body*
- *Internally painted glass diffuser*
- *Aluminum reflector*
- *Silicone gasket*
- *Internal power supply*

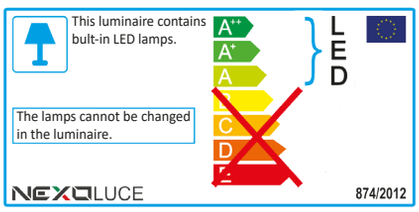





IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	11 W

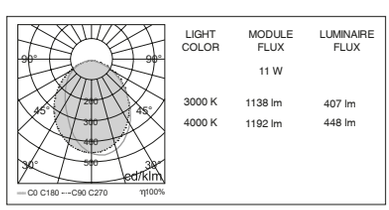

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5475	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.11** 11 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K				**.B** GREY
							.C DARK GREY

CODE EXAMPLE:
Wall mounted LED projector with light color at 3000K, IP65, 11W, opal diffuser, ON/OFF control, frame dark grey color without emergency kit **5475.5B.11AD1.C**

TRONCHETTO LED

SURFACE

IP55

LED

30W

cod. 5514 /// TRONCHETTO LED

cod. 5514 /// TRONCHETTO LED

- *Surface mounted light*
- *Led COB (90lm/W)*
- *Aluminium body*
- *Powder coating with special treatment for outdoor use*
- *Tempered safety glass diffuser*
- *Stainless steel screws*
- *Internal power supply*

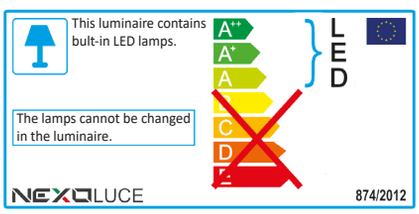







IP55

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5514	**.** WITHOUT EM. KIT	**Z** IP55	**B** 3000 K	**.30** 30 W	**.I** 48°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**CV** 48° FROST	**0** DIMM. 0-10V	**.B** GREY
							.D BLACK

CODE EXAMPLE:
Surface LED mounted light with warm white light color at 3000K, IP55, 30W, 48°FROST optic, ON/OFF control, frame grey color without EM kit **5514.ZB.30CV1.B**

TRONCHETTO Q LED

SURFACE

IP55

LED

30W

cod. 5515 /// TRONCHETTO Q LED

cod. 5515 /// TRONCHETTO Q LED

- *Surface mounted light*
- *Led COB (90lm/W)*
- *Aluminium body*
- *Powder coating with special treatment for outdoor use*
- *Tempered safety glass diffuser*
- *Stainless steel screws*
- *Internal power supply*

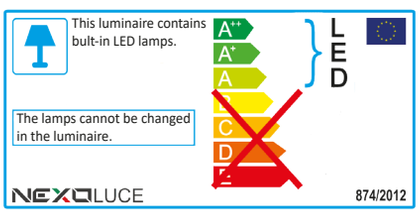

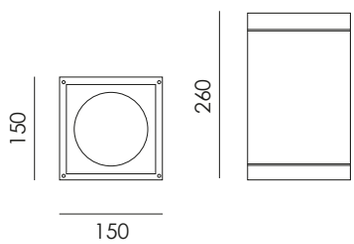





IP55

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5515	**.** WITHOUT EM. KIT	**Z** IP55	**B** 3000 K	**.30** 30 W	**.I** 48°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**CV** 48° FROST	**0** DIMM. 0-10V	**.B** GREY
							.D BLACK

CODE EXAMPLE:
Surface LED mounted light with warm white light color at 3000K, IP55, 30W, 48°FROST optic, ON/OFF control, frame grey color without EM kit **5515.ZB.30CV1.B**

CIPPO 17 LED

SURFACE

IP20

LED

17W

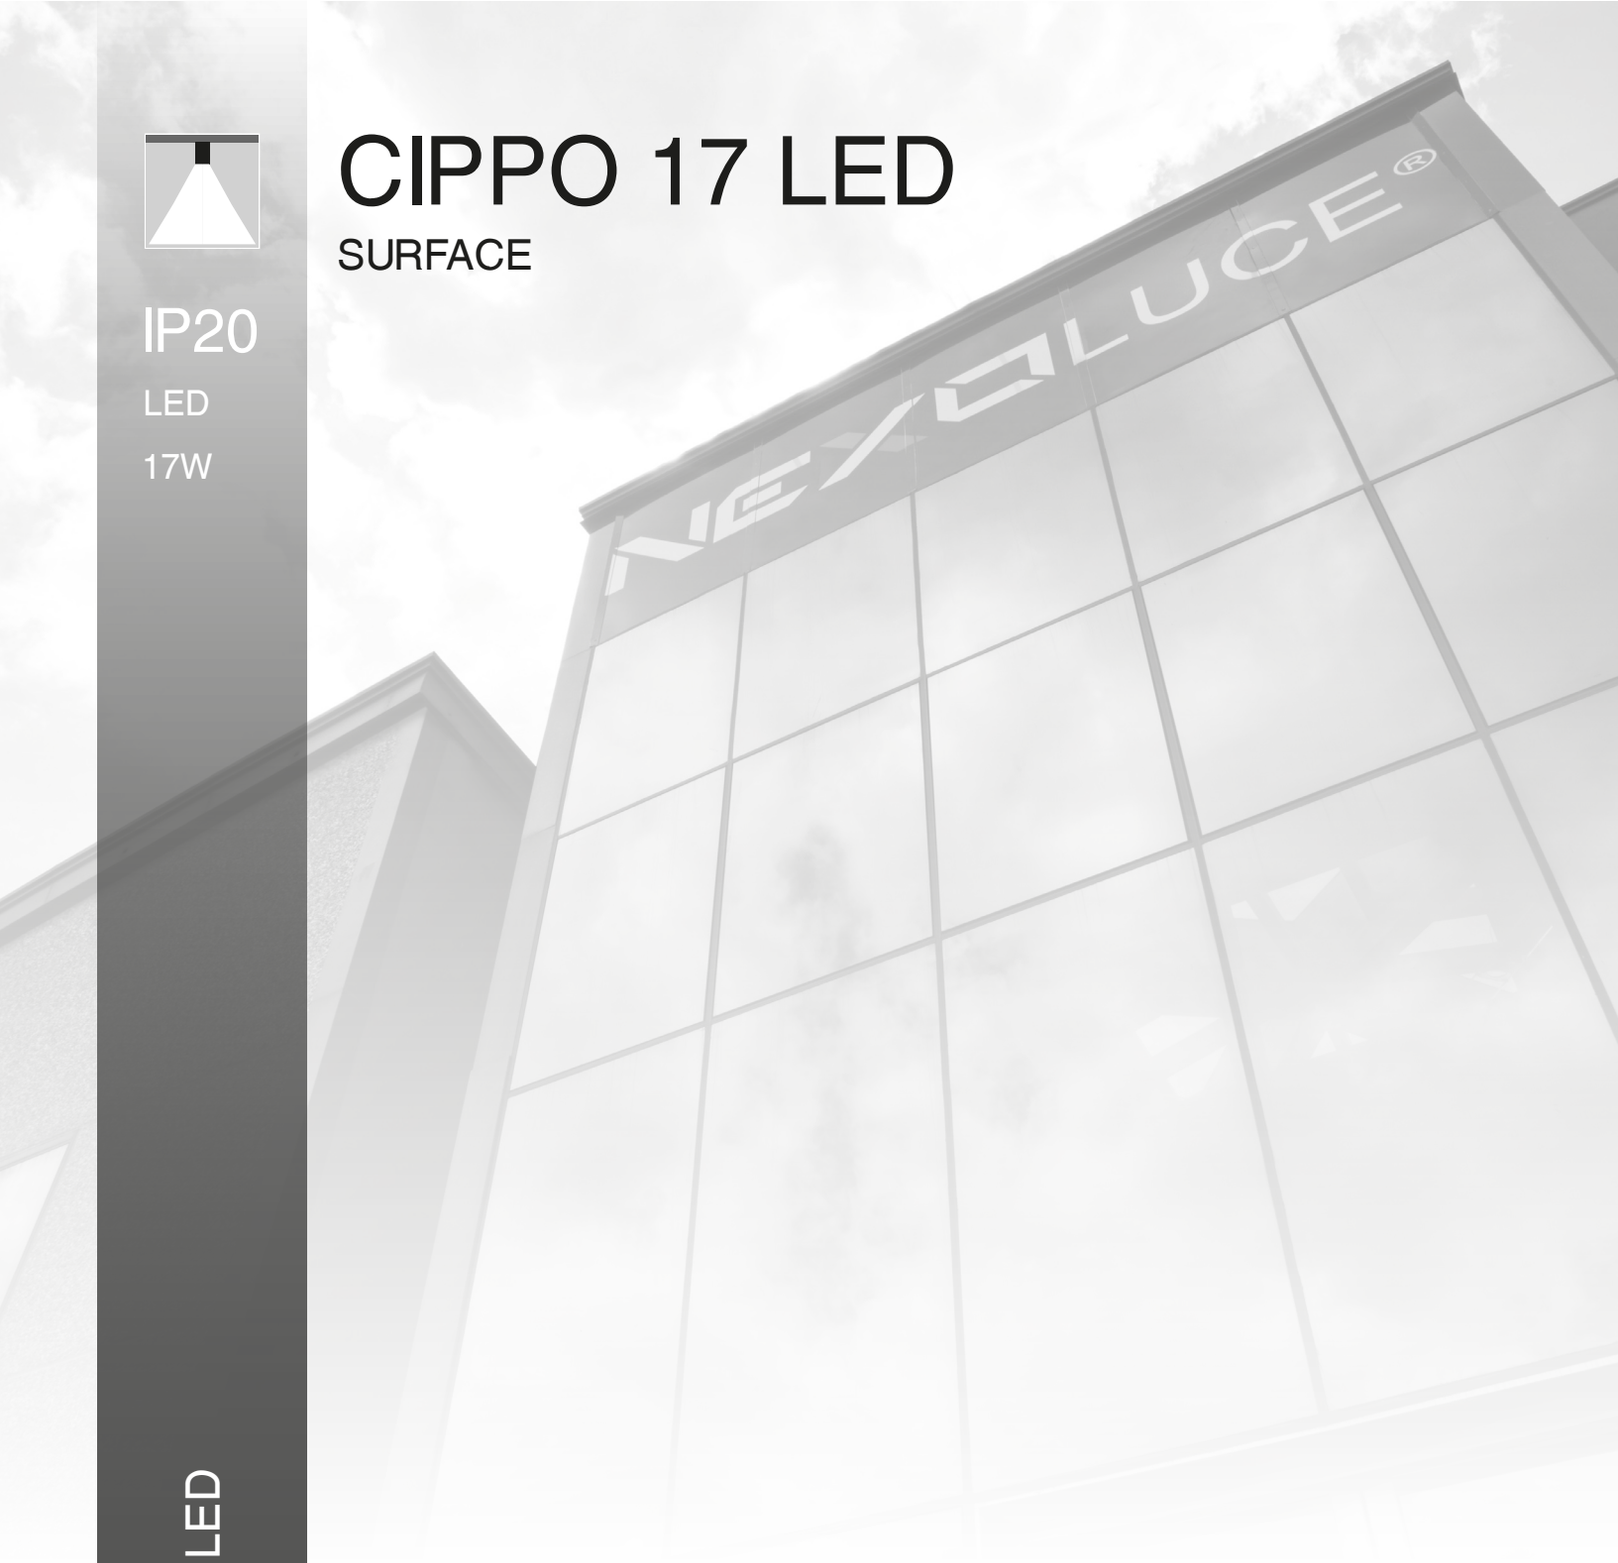

cod. 5267 /// CIPPO 17 LED

cod. 5267 /// CIPPO 17 LED

- *Surface mounted light*
- *Metal body*
- *Glass diffuser*
- *Available with 3 hours emergency kit*

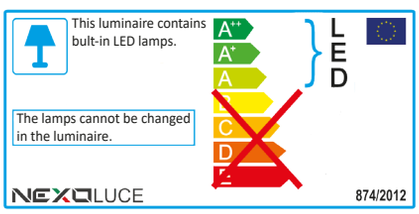





IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	17 W

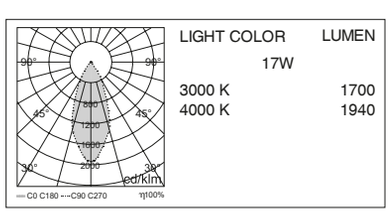

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5267	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.17** 17 W	**AX** CLEAR DIFFUSER	**1** ON / OFF	**.A** WHITE
	A 3H EM. KIT INTEGRATED		**C** 4000 K				

CODE EXAMPLE:
Surface mounted light with warm white light color at 3000K, IP20, 17W, clear diffuser, ON/OFF control, frame white color without emergency kit **5267.1B.17AD1.A**

CIPPO 29 LED

SURFACE

IP20

LED

29W

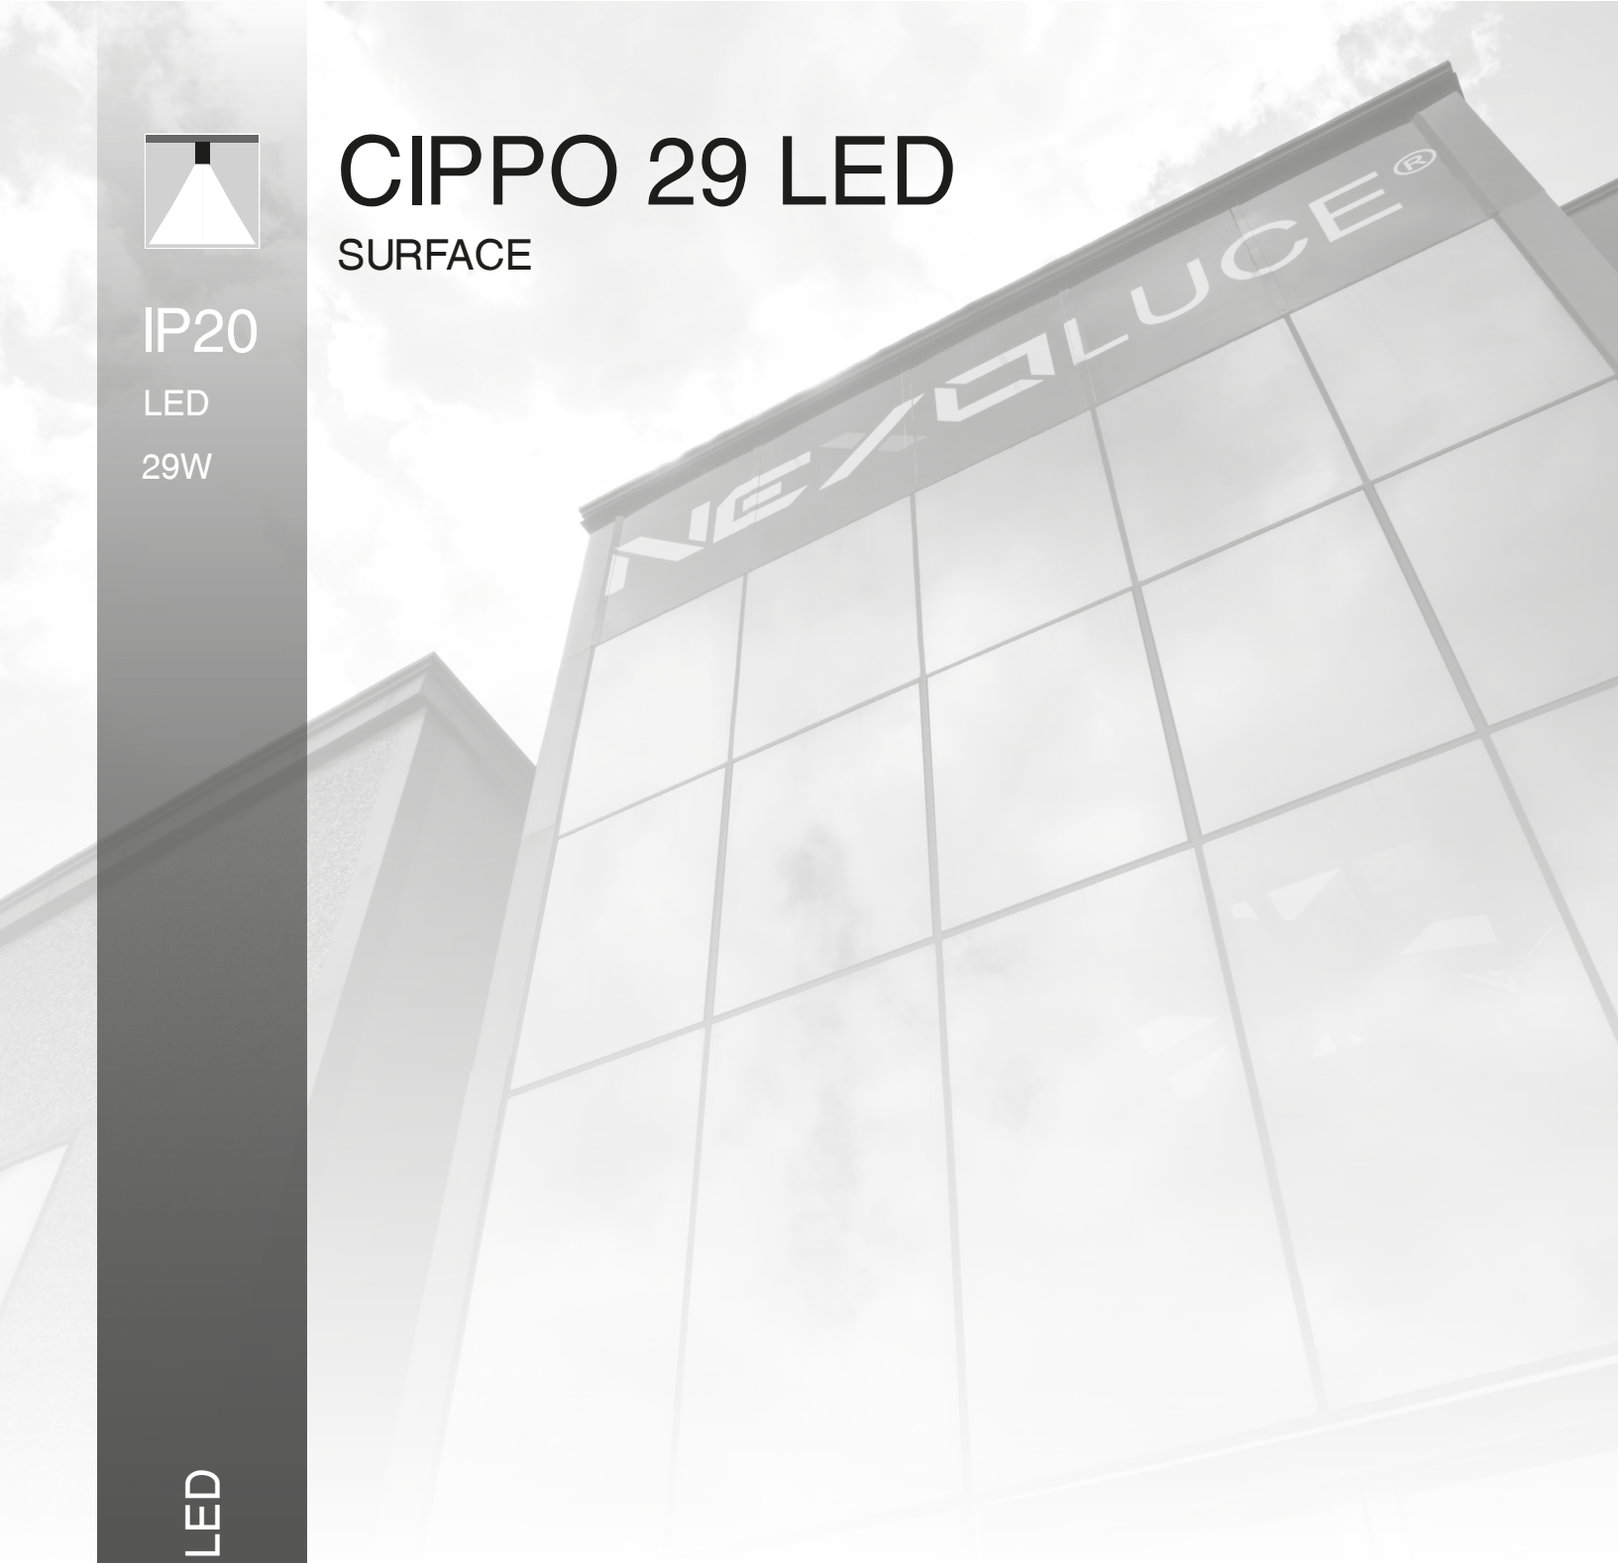

cod. 5307 /// CIPPO 29 LED

cod. 5307 /// CIPPO 29 LED

- *Surface mounted light*
- *Metal body*
- *Glass diffuser*
- *Available with 3 hours emergency kit*

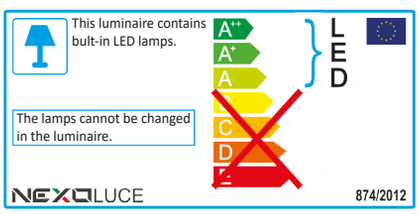

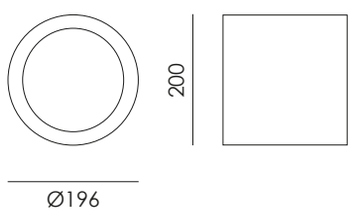



IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	29 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5307	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.29** 29 W	**AX** CLEAR DIFFUSER	**1** ON / OFF	**.A** WHITE
	A 3H EM. KIT INTEGRATED		**C** 4000 K		**AG** FROST		

CODE EXAMPLE:
Surface mounted light with warm white light color at 3000K, IP20, 29W, clear diffuser, ON/OFF control, frame white color without emergency kit **5307.1B.29AX1.A**

COFANETTO Q LED

SURFACE

IP65

LED

12W

cod. 5271 /// COFANETTO Q LED

cod. 5271 /// COFANETTO Q LED

- *Surface mounted light*
- *Plastic body*
- *Plastic diffuser*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

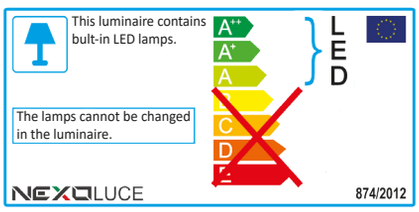



Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0013.0**

ACCESSORIES

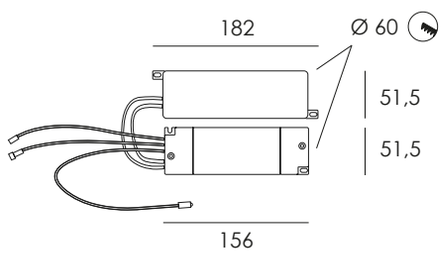

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	12 W

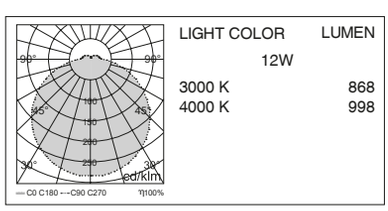

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5271	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.12** 12 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K		**AX** CLEAR DIFFUSER		

CODE EXAMPLE:
Surface mounted light with warm white light color at 3000K, IP65, 12W, opal diffuser, ON/OFF control, frame white color without emergency kit **5271.5B.12AD1.A**

COFANETTO T LED

SURFACE

IP65

LED

15W

18W

24W

cod. 5272 /// COFANETTO T LED

cod. 5272 /// COFANETTO T LED

- *Surface mounted light*
- *Plastic body*
- *Plastic diffuser*
- *Available with 3 hours emergency kit*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

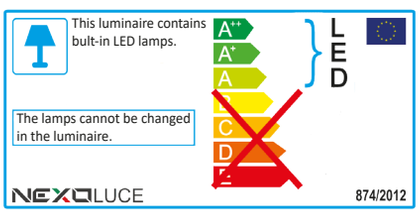



ACCESSORIES

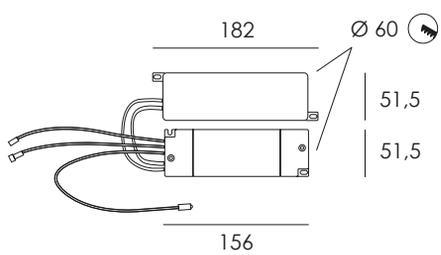

Finishing

WHITE

3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP20
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0013.0**

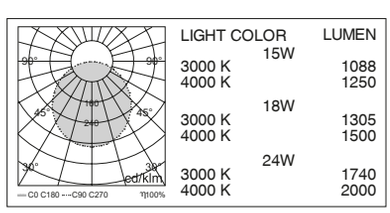

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	15 / 18 / 24 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5272	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.15** 15 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
			C 4000 K	**.18** 18 W			
				.24 24 W			

CODE EXAMPLE:
Surface mounted light warm white light color at 3000K, IP65, 15W, opal diffuser, ON/OFF control, frame white color without emergency kit **5272.5B.15AD1.A**

SOLE

SURFACE

IP66

E27

MAX 9W

MAX 23W

cod. 5009 /// SOLE

- *Surface mounted light*
- *Die-cast aluminium body*
- *Glass diffuser, white painted inside*
- *Aluminium reflector*
- *Stainless steel closing screws*

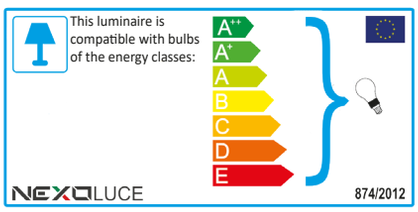





IP66

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 9 W
E27 FL	220/240Vac 50/60Hz	MAX 23 W

LAMP NOT INCLUDED

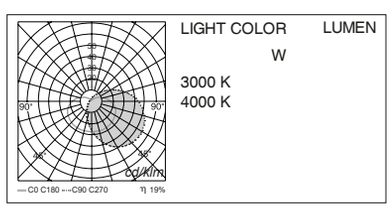

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5009	**.** WITHOUT EM. KIT	**6** IP66	**Z** E27	**M09** MAX 9 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
				M23 MAX 23 W			**.B** GREY
							.C DARK GREY

CODE EXAMPLE:
Surface mounted light with E27 lamp, IP66, MAX 23W, opal diffuser, ON/OFF control, frame white color without emergency kit **5009.6ZM23AD1.A**

SOLE 2

SURFACE

IP66

E27

MAX 23W

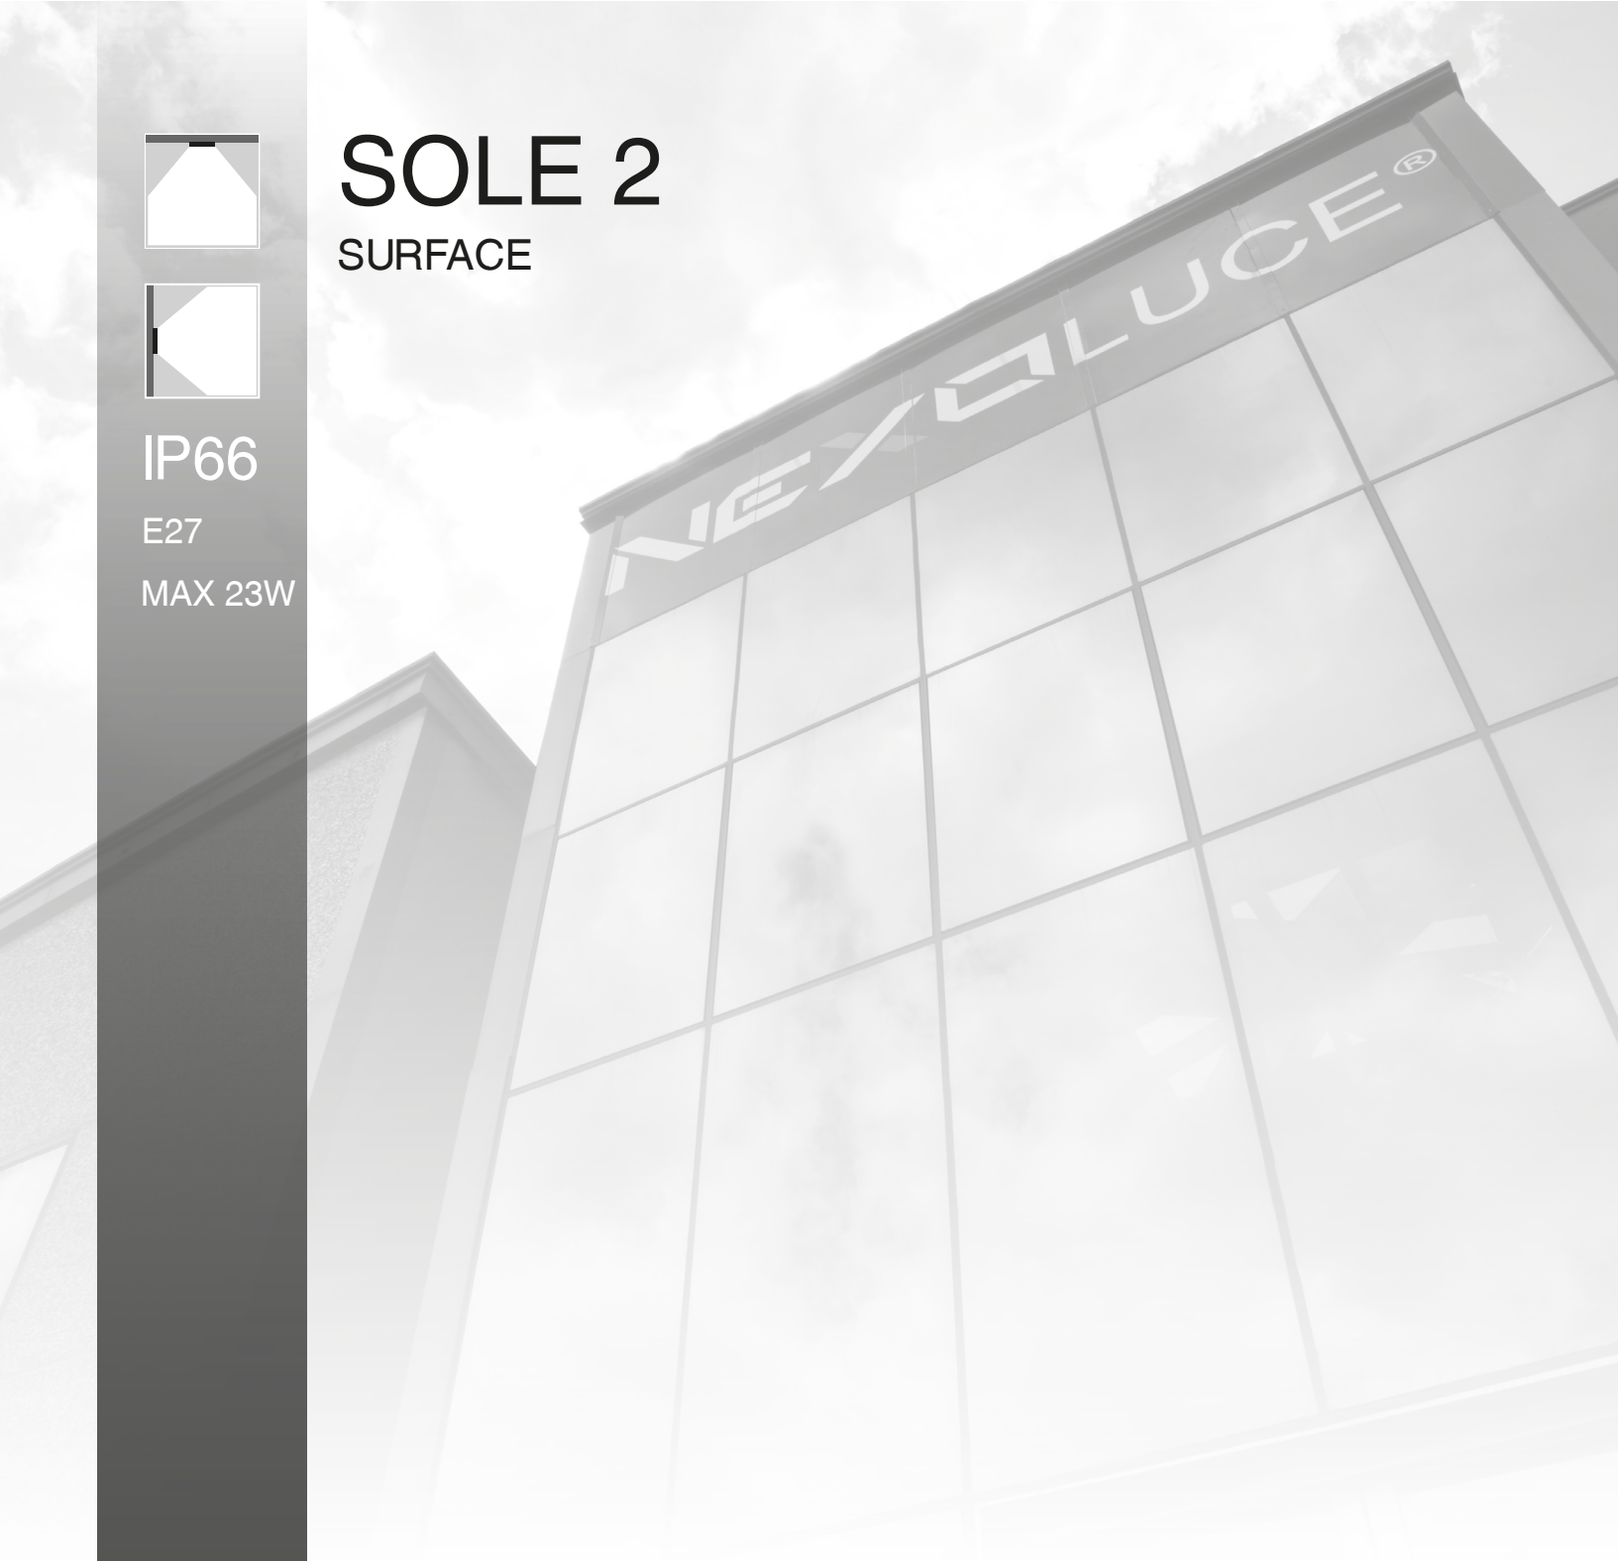

cod. 5146 /// SOLE 2

- *Surface mounted light*
- *Metal body*
- *Glass diffuser*

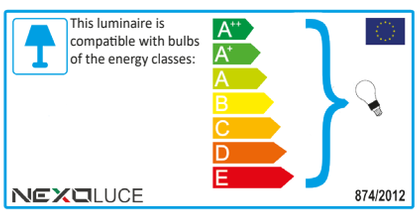





IP66

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 23 W

LAMP NOT INCLUDED

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5146	**.** WITHOUT EM. KIT	**6** IP66	**Z** E27	**M23** MAX 23 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:
Surface mounted light with E27 lamp, IP66, MAX 23W, opal diffuser, ON/OFF control, frame white color without emergency kit **5146.6ZM23AD1.A**

TARTARUGA T

SURFACE

IP65

E27

MAX 60W

cod. 5318 /// TARTARUGA T

cod. 5318 /// TARTARUGA T

- *Bulkhead light*
- *Die-cast aluminium body*
- *Glass diffuser, white painted inside*
- *Aluminium reflector*
- *Stainless steel closing screws*

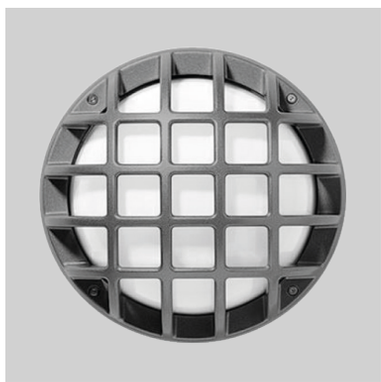

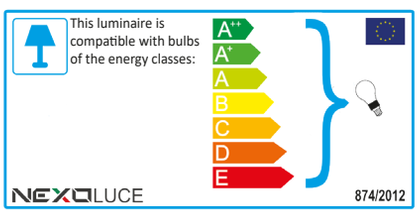





IP65

Lamp	Input	Power
E27	220/240Vac 50/60Hz	MAX 60 W

LAMP NOT INCLUDED

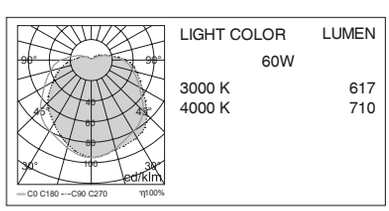

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5318	**.** WITHOUT EM. KIT	**5** IP65	**Z** E27	**M60** MAX 60 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:
Bulkhead light with E27 lamp, IP65, MAX 60W, opal diffuser, ON/OFF control, frame white color without emergency kit **5318.5ZM60AD1.A**

TARTARUGA

SURFACE

IP44

E27

MAX 9W
MAX 23W

cod. 5017 /// TARTARUGA

cod. 5017 /// TARTARUGA

- *Bulkhead light*
- *Plastic body*
- *Glass diffuser*
- *Aluminium cable-carry bracket*
- *Stainless steel closing screws*

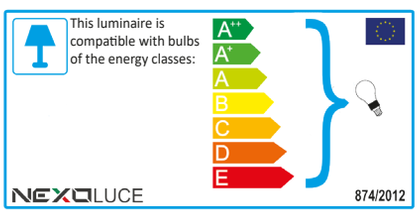

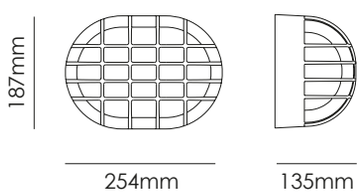

IP44

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 9 W
E27 FL	220/240Vac 50/60Hz	MAX 23 W

LAMP NOT INCLUDED

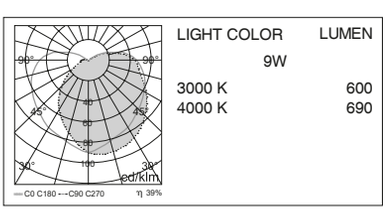

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5017	**.** WITHOUT EM. KIT	**3** IP44	**Z** E27	**M09** MAX 9 W (LED)	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
				M23 MAX 23 W (FL)			**.B** GREY
							.C DARK GREY
							.D BLACK

CODE EXAMPLE:
Bulkhead light with E27 lamp, IP44, MAX 23W, opal diffuser, ON/OFF control, frame white color without emergency kit **5017.3ZM23AD1.A**

TARTARUGA 2

SURFACE

IP66

E27

MAX 12W

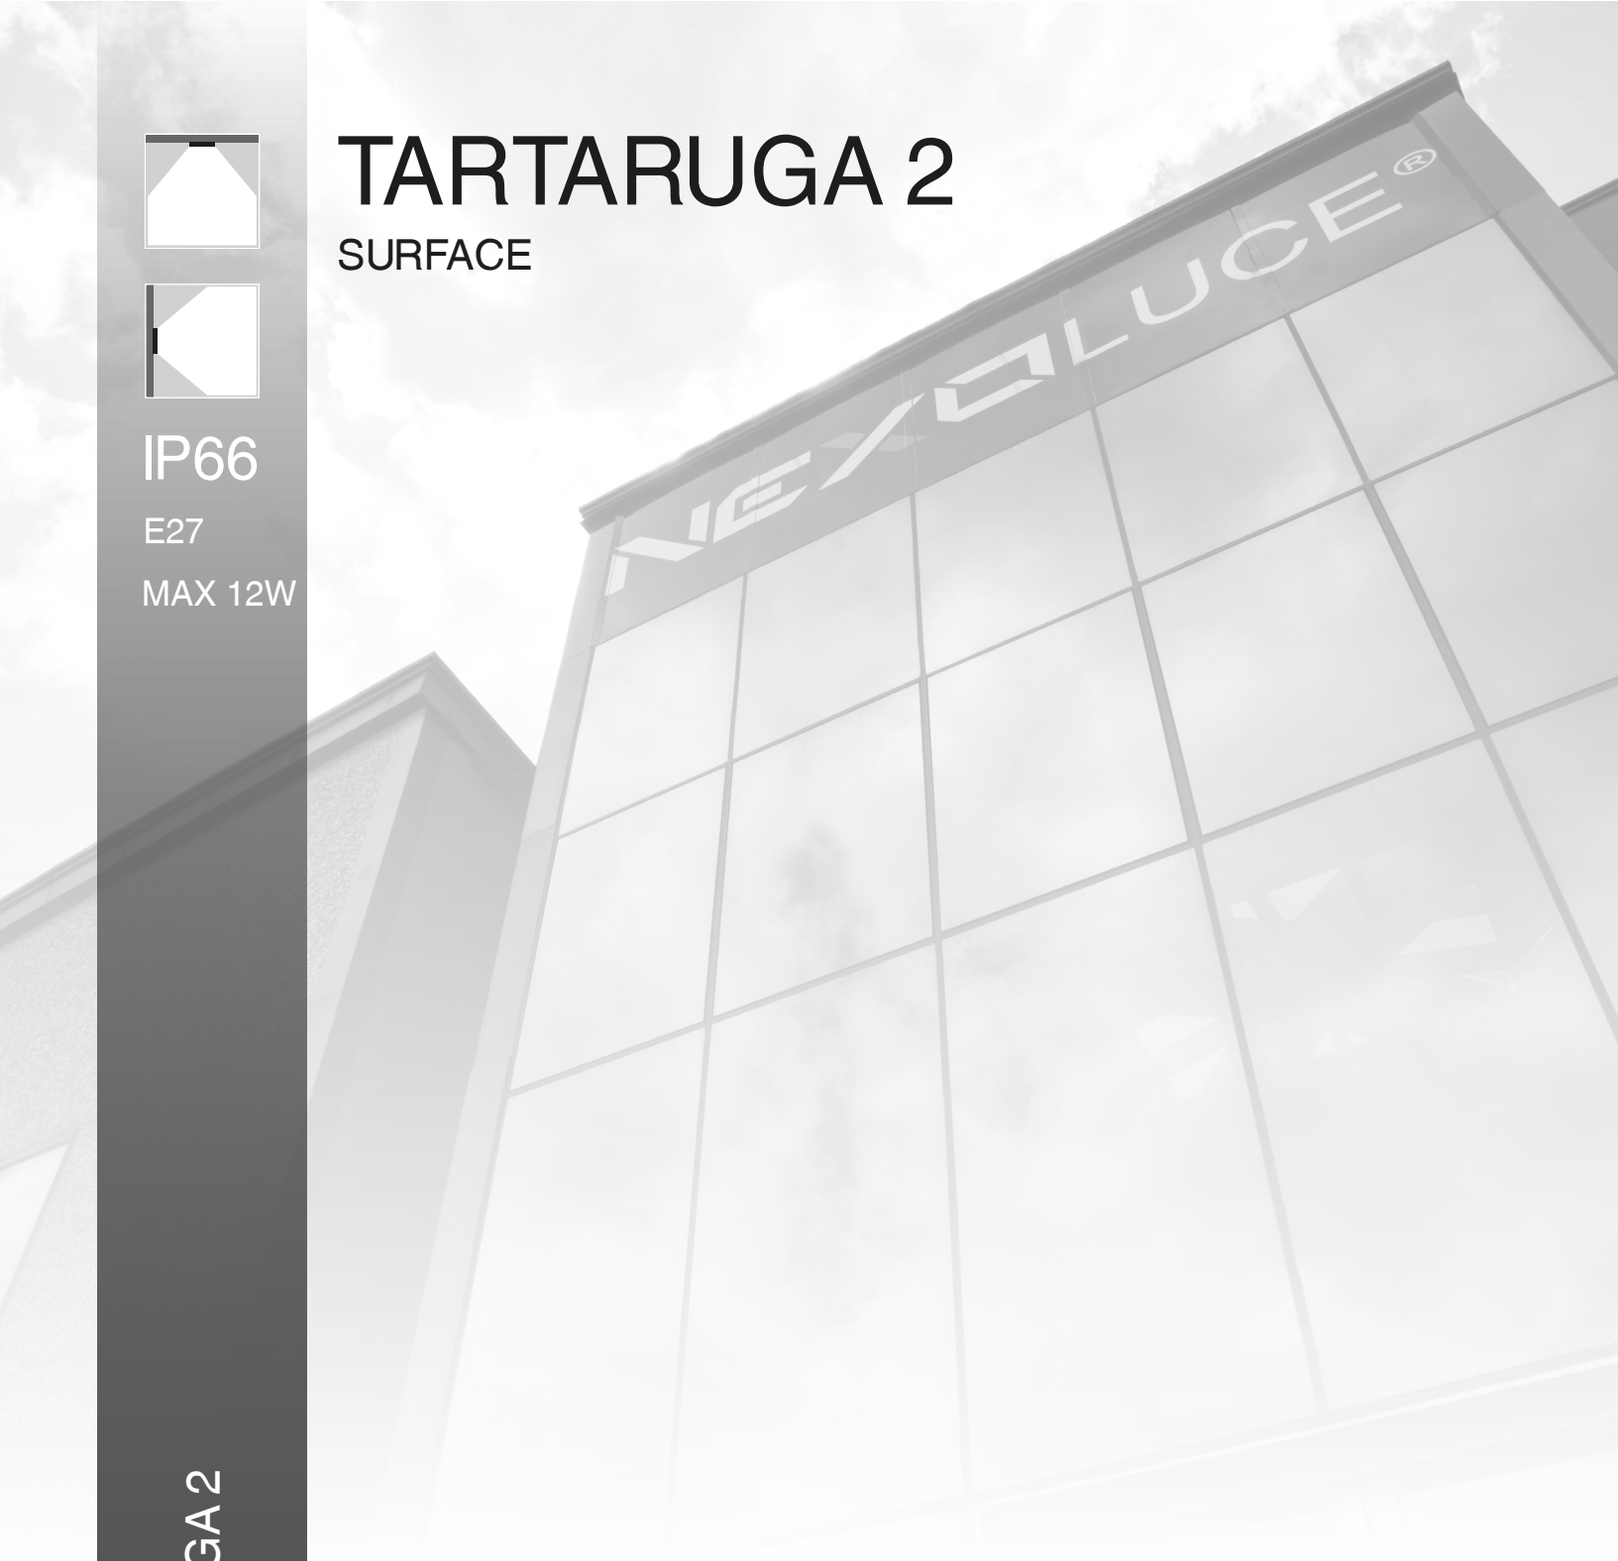

cod. 5021 /// TARTARUGA 2

cod. 5021 /// TARTARUGA 2

- *Bulkhead light*
- *Die-cast aluminium body*
- *Glass diffuser*
- *Aluminium cable-carry bracket*
- *Stainless steel closing screws*

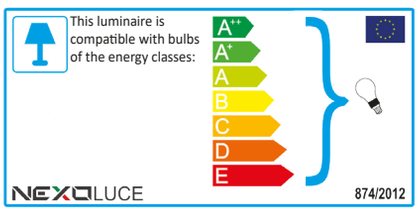

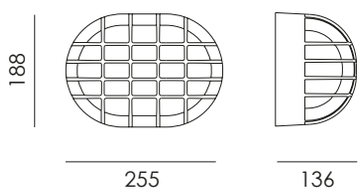



IP66

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 12 W

LAMP NOT INCLUDED

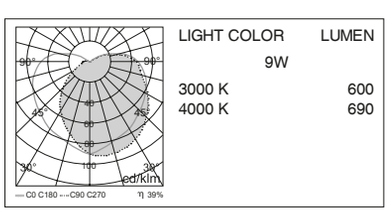

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5021	**.** WITHOUT EM. KIT	**6** IP66	**Z** E27	**M12** MAX 12 W (LED)	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:
Bulkhead light with E27 lamp, IP66, MAX 12W, opal diffuser, ON/OFF control, frame white color without emergency kit **5021.6ZM12AD1.A**

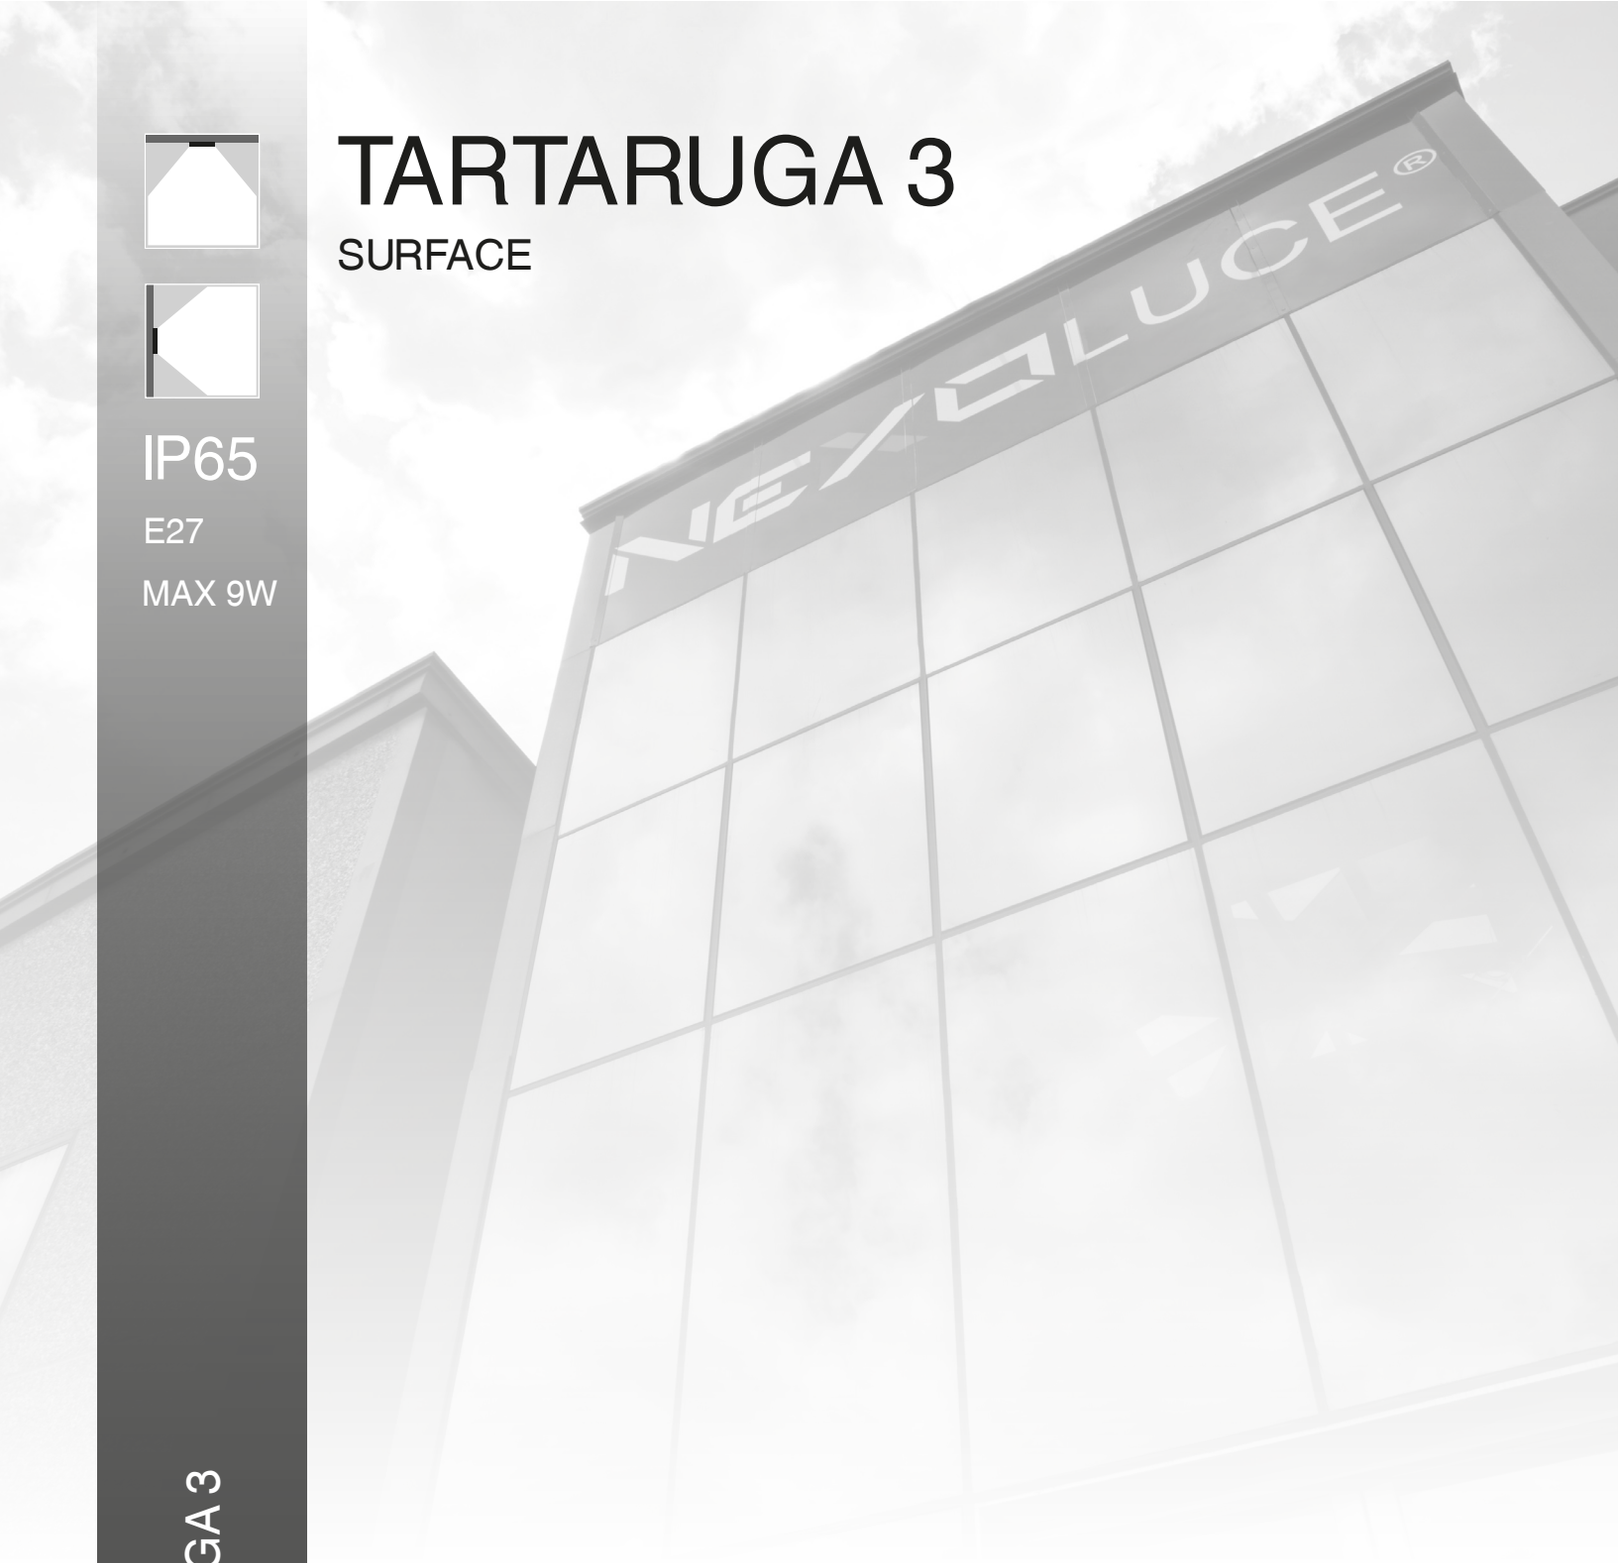

TARTARUGA 3

SURFACE

IP65

E27

MAX 9W

cod. 5074 /// TARTARUGA 3

cod. 5074 /// TARTARUGA 3

- *Bulkhead light*
- *Metal body with polyester powder paint resistant to corrosion*
- *Glass diffuser*
- *Stainless steel closing screws*

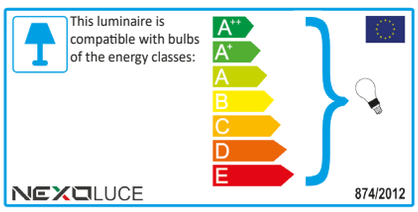

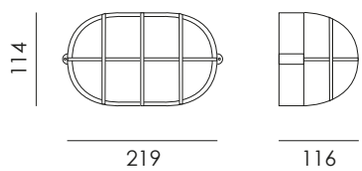



IP65

Lamp	Input	Power
E27 LED	220/240Vac 50/60Hz	MAX 9 W

LAMP NOT INCLUDED

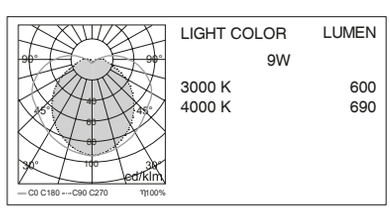

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5074	**.** WITHOUT EM. KIT	**5** IP65	**Z** E27	**M09** MAX 9 W (LED)	**AD** OPAL DIFFUSER	**1** ON / OFF	**.A** WHITE
							.B GREY
							.C DARK GREY

CODE EXAMPLE:
Bulkhead light with E27 lamp, IP65, MAX 9W, opal diffuser, ON/OFF control, frame white color without emergency kit **5074.5ZM09AD1.A**

IP66

LED

18W

STAGNA 18 LED

SURFACE

cod. 5388 /// STAGNA 18 LED

cod. 5388 /// STAGNA 18 LED

- *Surface mounted light for damp or dust environments and sheltered outdoor areas*
- *Body in injected polycarbonate with UV filter*
- *Prismatic polycarbonate diffuser with UV protection*
- *Stainless steel clips*
- *Stainless steel fixing brackets and suspension triangles included*
- *Polyurethane gasket*
- *Electronic ballast included*
- *Available with 3 hours emergency kit*

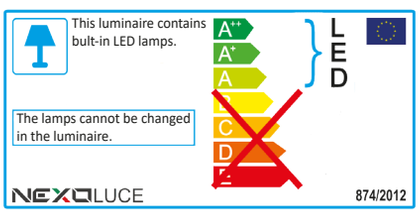





Finishing

ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66

Lamp	Input	Power
LED	220/240Vac 50/60Hz	18 W

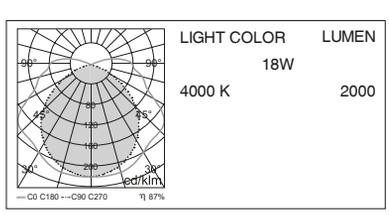

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5388	**.** WITHOUT EM. KIT	**6** IP66	**B** 3000 K	**.18** 18 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.B** GREY
	A 3H EM. KIT INTEGRATED		**C** 4000 K		**AX** CLEAR DIFFUSER		

CODE EXAMPLE:
Surface mounted light with natural white light color at 4000K, IP66, 18W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5388.6C.18AD1.B**

STAGNA 28 LED

SURFACE

IP66

LED

28W

cod. 5389 /// STAGNA 28 LED

cod. 5389 /// STAGNA 28 LED

- *Surface mounted light for damp or dust environments and sheltered outdoor areas*
- *Body in injected polycarbonate with UV filter*
- *Prismatic polycarbonate diffuser with UV protection*
- *Stainless steel clips*
- *Stainless steel fixing brackets and suspension triangles included*
- *Polyurethane gasket*
- *Electronic ballast included*
- *Available with 3 hours emergency kit*

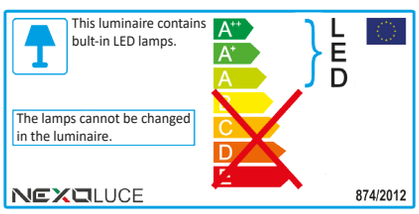





Finishing

GREY

ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66

Lamp	Input	Power
LED	220/240Vac 50/60Hz	28 W



LIGHT COLOR	LUMEN
28W	
4000 K	3000

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5389	**.** WITHOUT EM. KIT	**6** IP66	**B** 3000 K	**.28** 28 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.B** GREY
	A 3H EM. KIT INTEGRATED		**C** 4000 K		**AX** CLEAR DIFFUSER		

CODE EXAMPLE:
Surface mounted light with natural white light color at 4000K, IP66, 28W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5389.6C.28AD1.B**

IP66

LED

36W

STAGNA 36 LED

SURFACE

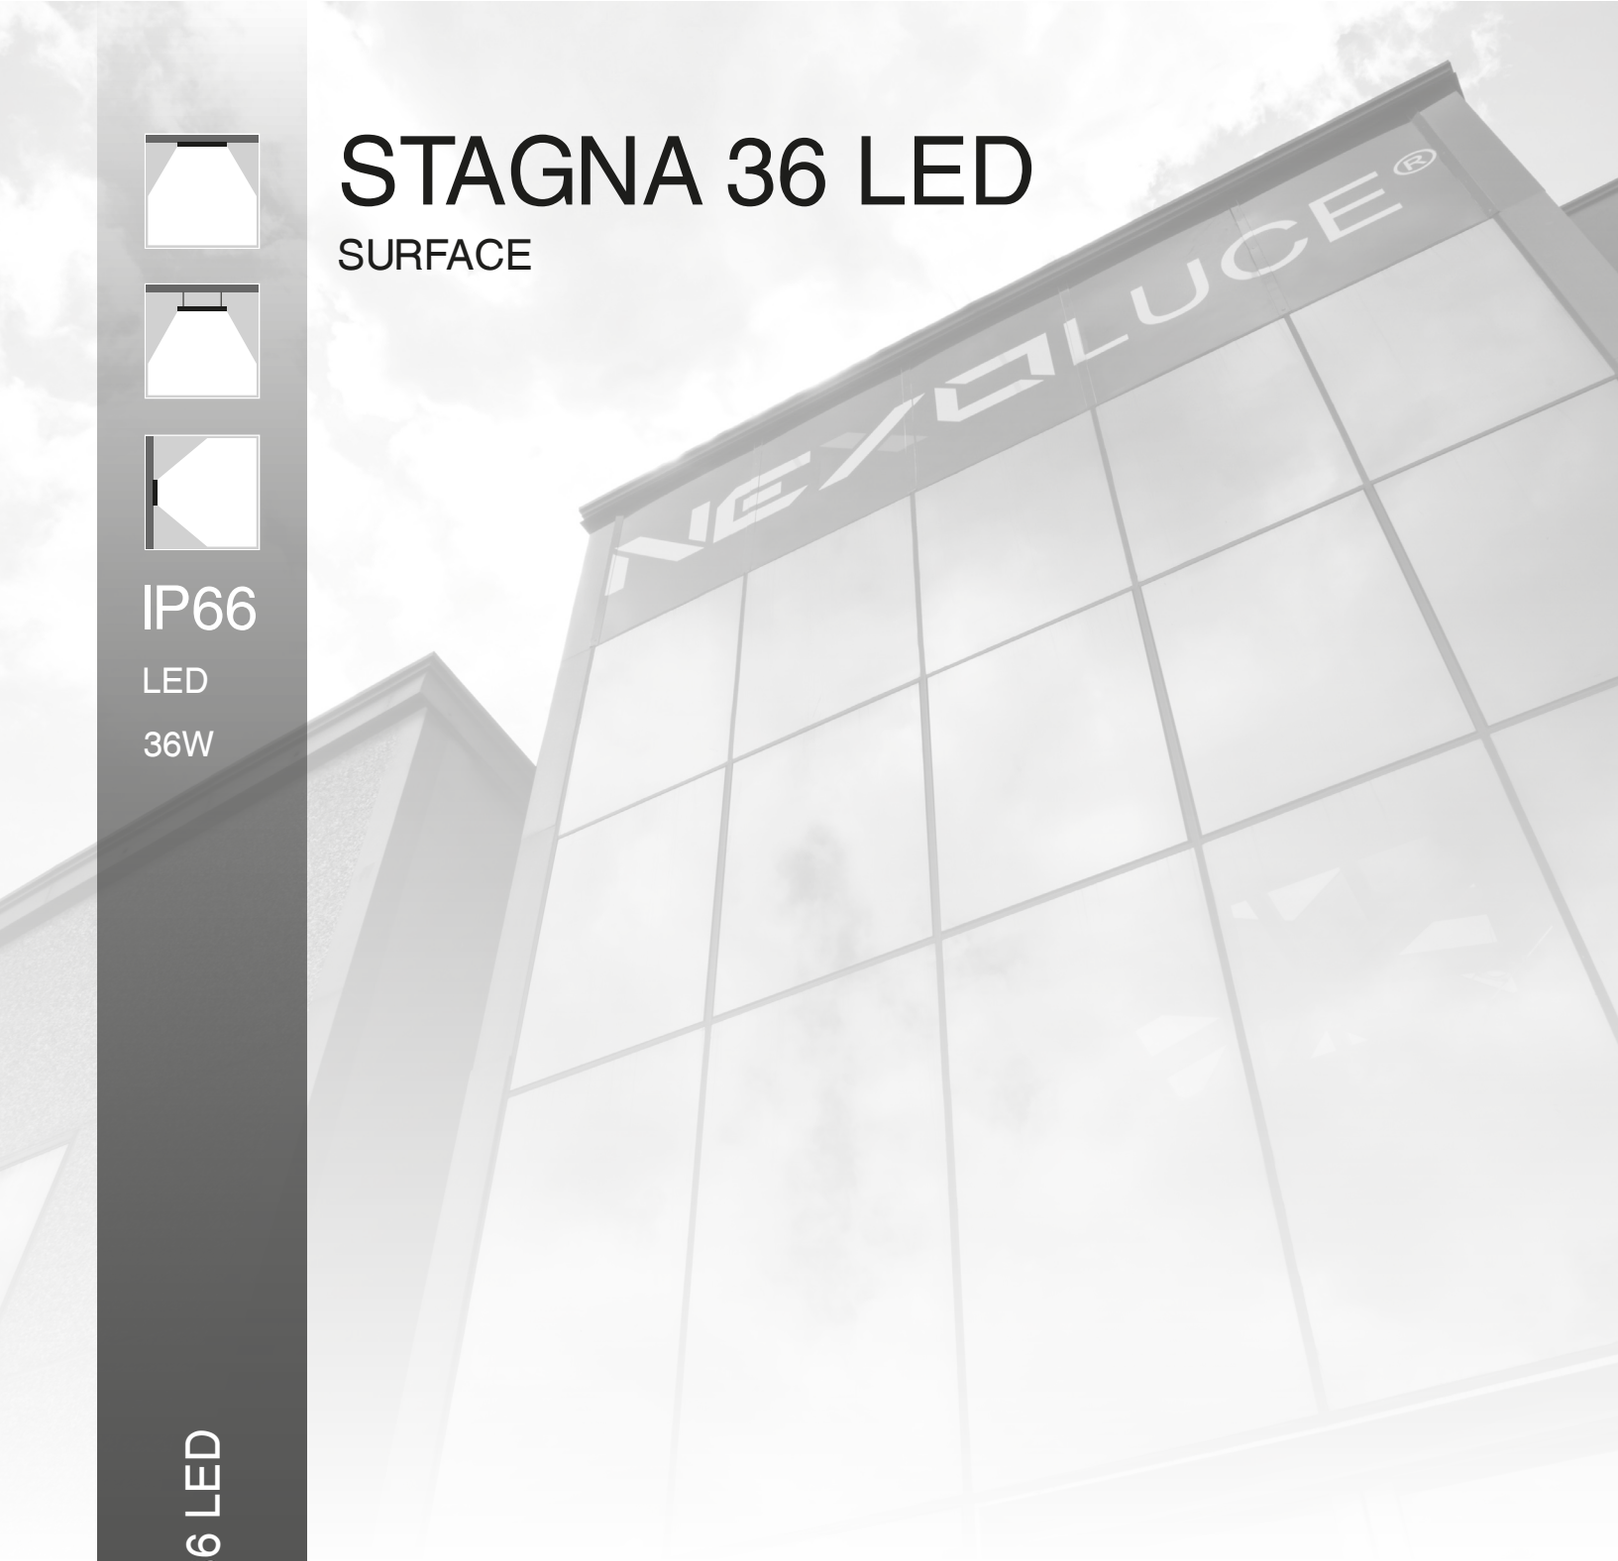

cod. 5390 /// STAGNA 36 LED

cod. 5390 /// STAGNA 36 LED

- *Surface mounted light for damp or dust environments and sheltered outdoor areas*
- *Body in injected polycarbonate with UV filter*
- *Prismatic polycarbonate diffuser with UV protection*
- *Stainless steel clips*
- *Stainless steel fixing brackets and suspension triangles included*
- *Polyurethane gasket*
- *Electronic ballast included*
- *Available with 3 hours emergency kit*

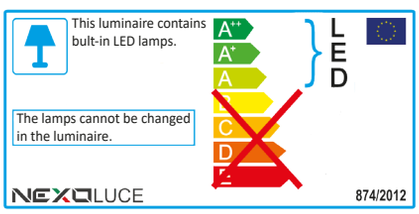





Finishing

ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66

Lamp	Input	Power
LED	220/240Vac 50/60Hz	36 W

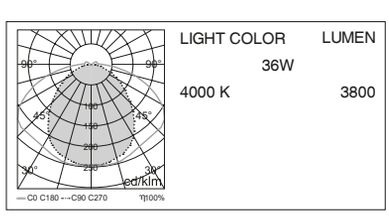

LIGHT COLOR	LUMEN
36W	
4000 K	3800

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5390	**.** WITHOUT EM. KIT	**6** IP66	**B** 3000 K	**.36** 36 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.B** GREY
	A 3H EM. KIT INTEGRATED		**C** 4000 K		**AX** CLEAR DIFFUSER		

CODE EXAMPLE:
Surface mounted light with natural white light color at 4000K, IP66, 36W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5390.6C.36AD1.B**

IP66

LED

50W

STAGNA 50 LED

SURFACE

cod. 5391 /// STAGNA 50 LED

cod. 5391 /// STAGNA 50 LED

- *Surface mounted light for damp or dust environments and sheltered outdoor areas*
- *Body in injected polycarbonate with UV filter*
- *Prismatic polycarbonate diffuser with UV protection*
- *Stainless steel clips*
- *Stainless steel fixing brackets and suspension triangles included*
- *Polyurethane gasket*
- *Electronic ballast included*
- *Available with 3 hours emergency kit*

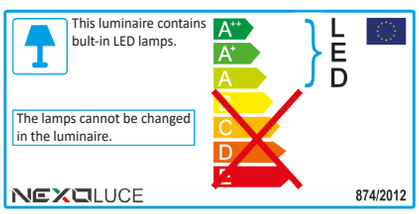





Finishing

ACCESSORIES



SUSPENDED MOUNTING KIT
2,0mt LENGTH code: **003.0192.0**
5,0mt LENGTH code: **003.0131.0**

IP66

Lamp	Input	Power
LED	220/240Vac 50/60Hz	50 W

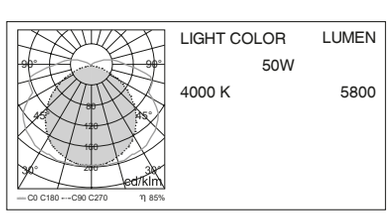

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5391	**.** WITHOUT EM. KIT	**6** IP66	**B** 3000 K	**.50** 50 W	**AD** OPAL DIFFUSER	**1** ON / OFF	**.B** GREY
	A 3H EM. KIT INTEGRATED		**C** 4000 K		**AX** CLEAR DIFFUSER		

CODE EXAMPLE:
Surface mounted light with natural white light color at 4000K, IP66, 50W, opal diffuser, ON/OFF control, frame grey color without emergency kit **5391.6C.50AD1.B**

PROJECTOR HIGH BAY

DRILLO 50 N

PROJECTOR

IP65

LED

50W

cod. 5455 /// DRILLO 50 N

cod. 5455 /// DRILLO 50 N

- *Outdoor projector with adjustable position*
- *Die-casting aluminium body and aluminium reflector*
- *Excellent waterproof performance and corrosion resistance*
- *Clear tempered glass diffuser*
- *Closure with steel clips, no screws*
- *Ultra-thin design*
- *View angle: 120°. Other optics available on request*

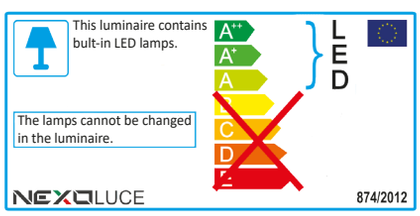



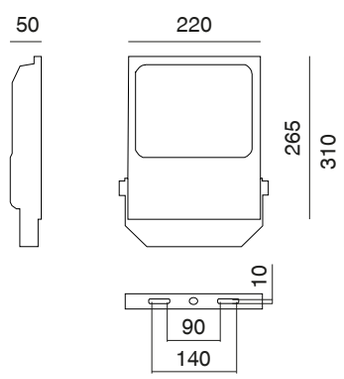

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100/277Vac 50/60Hz	50 W

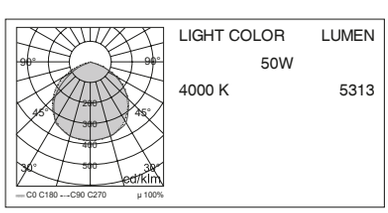

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5455	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.50** 50 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K				

CODE EXAMPLE:
LED Projector with warm white light color at 3000K, IP65, 50W, 120° optic, ON/OFF control, frame black color without emergency kit **5455.5B.50.Z1.D**

IP65

LED

100W

DRILLO 100 N

PROJECTOR

cod. 5456 /// DRILLO 100 N

cod. 5456 /// DRILLO 100 N

- *Outdoor projector with adjustable position*
- *Die-casting aluminium body and aluminium reflector*
- *Excellent waterproof performance and corrosion resistance*
- *Clear tempered glass diffuser*
- *Closure with steel clips, no screws*
- *Ultra-thin design*
- *View angle: 120°. Other optics available on request*

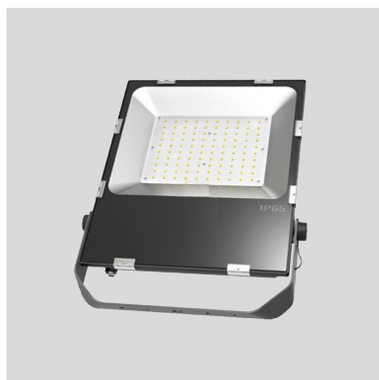

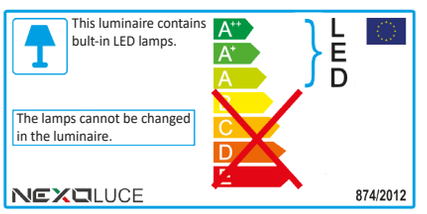



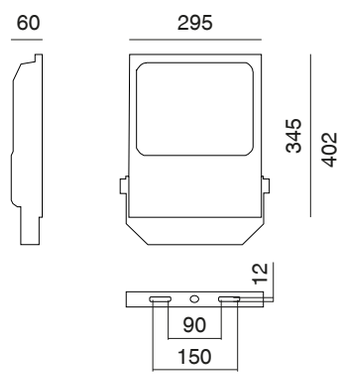

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100/277Vac 50/60Hz	100 W

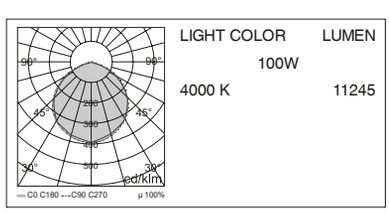

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5456	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**100** 100 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K				

CODE EXAMPLE:
LED Projector with warm white light color at 3000K, IP65, 100W, 120° optic, ON/OFF control, frame black color without emergency kit **5456.5B100.Z1.D**

DRILLO 150 N

PROJECTOR

IP65

LED

150W

cod. 5457 /// DRILLO 150 N

cod. 5457 /// DRILLO 150 N

- *Outdoor projector with adjustable position*
- *Die-casting aluminium body and aluminium reflector*
- *Excellent waterproof performance and corrosion resistance*
- *Clear tempered glass diffuser*
- *Closure with steel clips, no screws*
- *Ultra-thin design*
- *View angle: 120°. Other optics available on request*

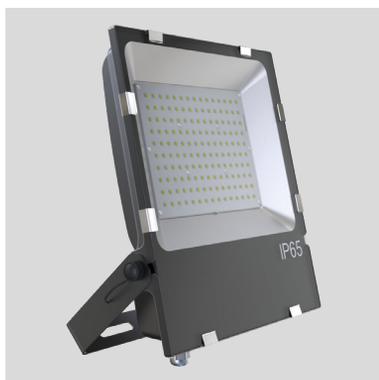

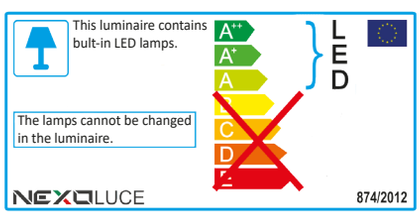



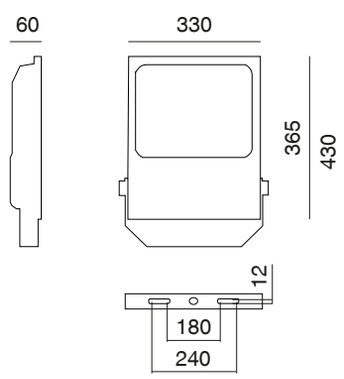

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100/277Vac 50/60Hz	150 W

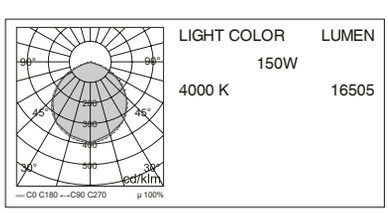

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5457	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**150** 150 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K				

CODE EXAMPLE:
LED Projector with warm white light color at 3000K, IP65, 150W, 120° optic, ON/OFF control, frame black color without emergency kit **5457.5B150.Z1.D**

CAMPO 240

PROJECTOR

IP65

LED

240W

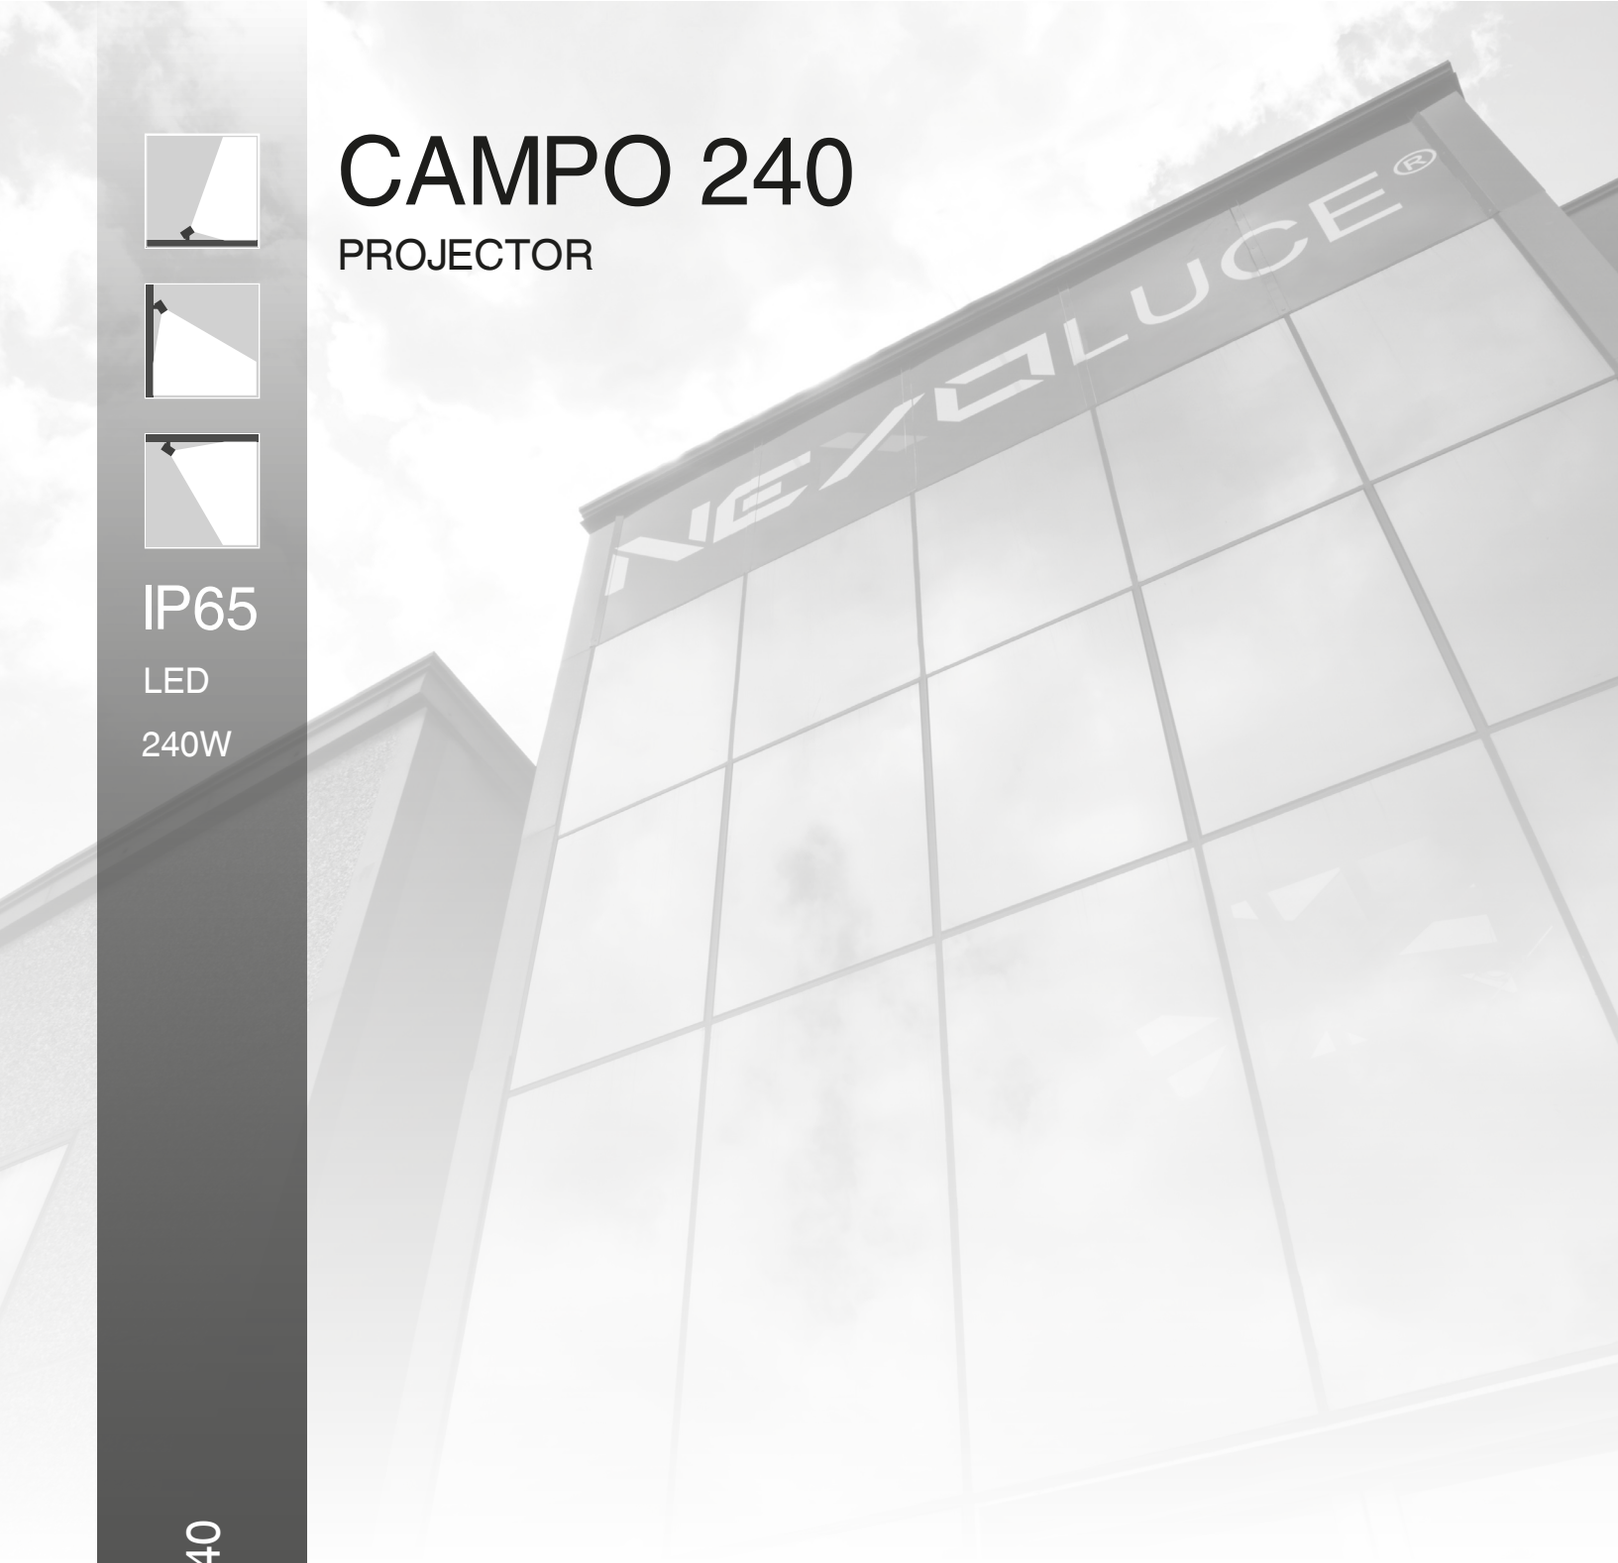

cod. 5480 /// CAMPO 240

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50° x 90°*
- *38400 lm*

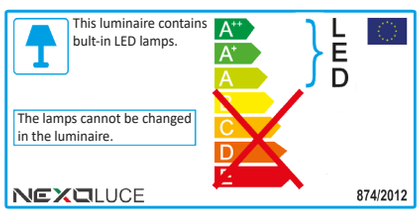



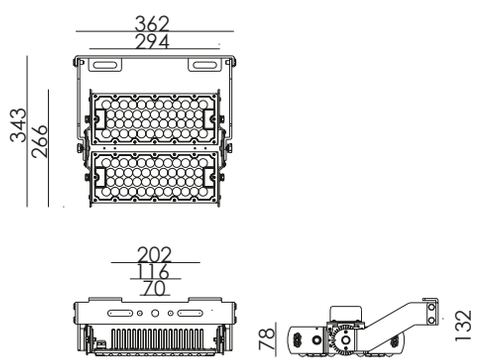

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	240 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5480	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**240** 240 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 240W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5480.5C240CI1.D**

CAMPO 320

PROJECTOR

IP65

LED

320W

cod. 5484 /// CAMPO 320

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50° x 90°*
- *51200 lm*

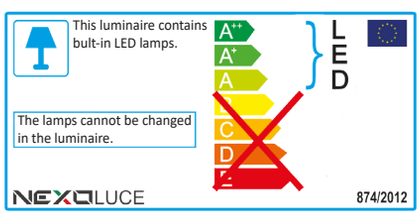



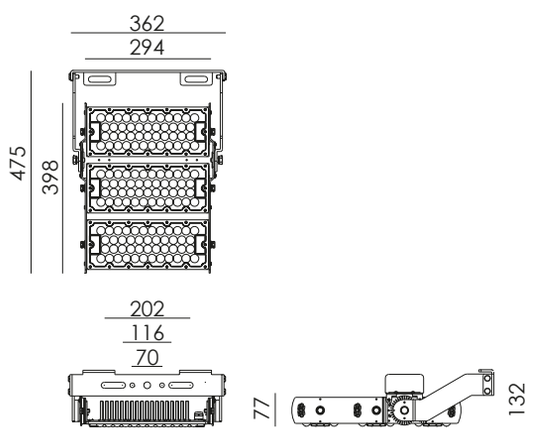

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	320 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5484	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**320** 320 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 320W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5484.5C320CI1.D**

CAMPO 480

PROJECTOR

IP65

LED

480W

cod. 5485 /// CAMPO 480

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50° x 90°*
- *76800 lm*

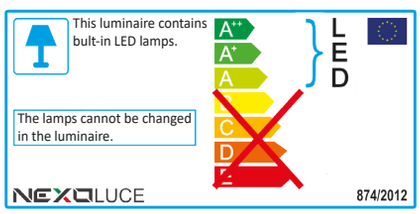



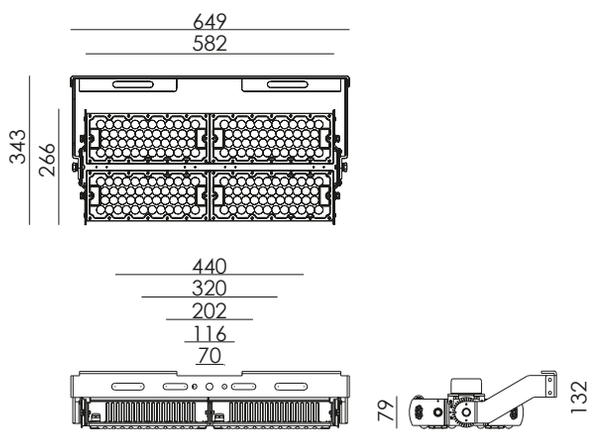

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	480 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5485	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**480** 480 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 480W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5485.5C480CI1.D**

CAMPO 720

PROJECTOR

IP65

LED

720W

cod. 5473 /// CAMPO 720

cod. 5473 /// CAMPO 720

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50° x 90°*
- *115200 lm*

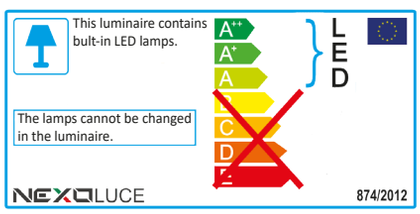



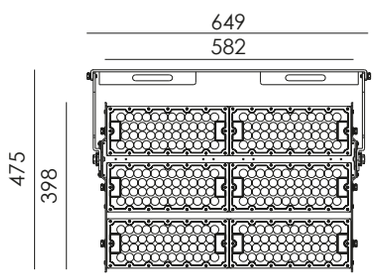





IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	720 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5473	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**720** 720 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 720W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5473.5C720CI1.D**

CAMPO 960

PROJECTOR

IP65

LED

960W

cod. 5486 /// CAMPO 960

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50°x 90°*
- *153600 lm*

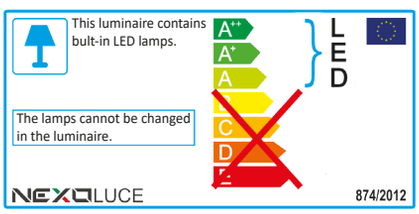



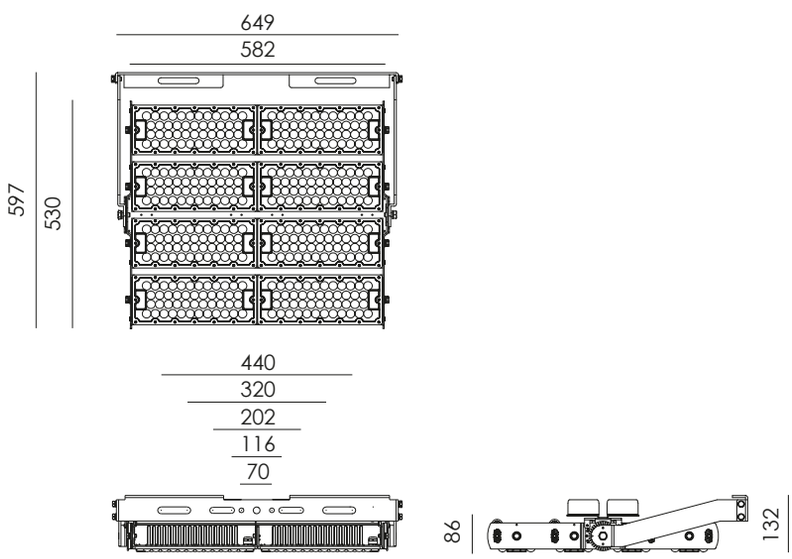

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	960 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5486	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**960** 960 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 960W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5486.5C960CI1.D**

CAMPO 1200

PROJECTOR

IP65

LED

1200W

cod. 5487 /// CAMPO 1200

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50° x 90°*
- *192000 lm*

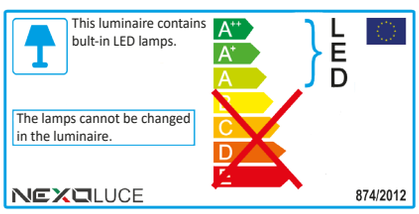



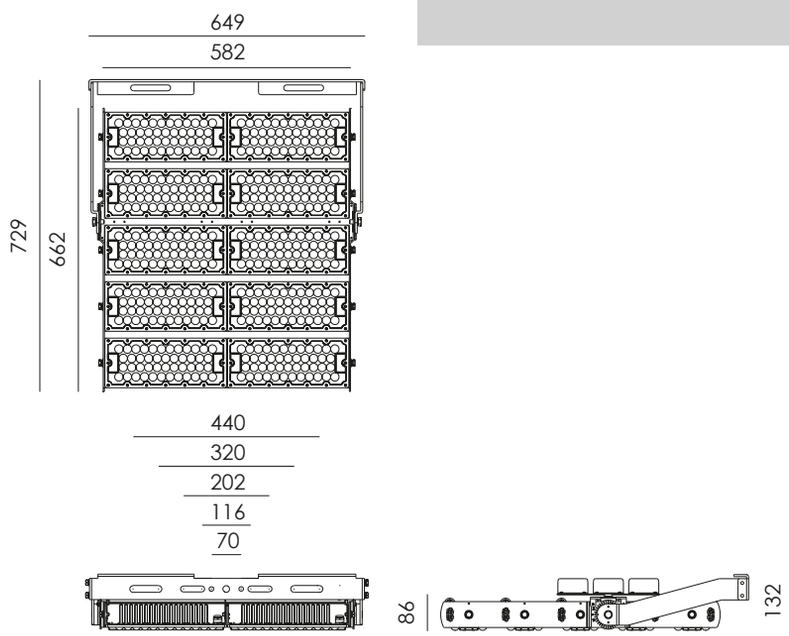

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	1200 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5487	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**.MA** 1200 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 1200W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5487.5C.MACI1.D**

CAMPO 1440

PROJECTOR

IP65

LED

1440W

cod. 5488 /// CAMPO 1440

- *Outdoor projector with adjustable position*
- *Independent adjustable led modules*
- *Aluminium body and clear PC lens*
- *Excellent waterproof performance and corrosion resistance*
- *Led Philips chip and high quality Meanwell driver included*
- *Asymmetrical optic 50° x 90°*
- *230400 lm*

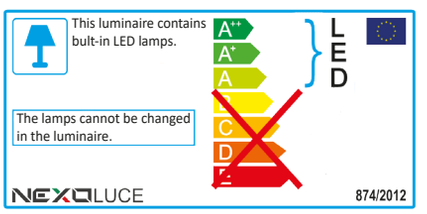



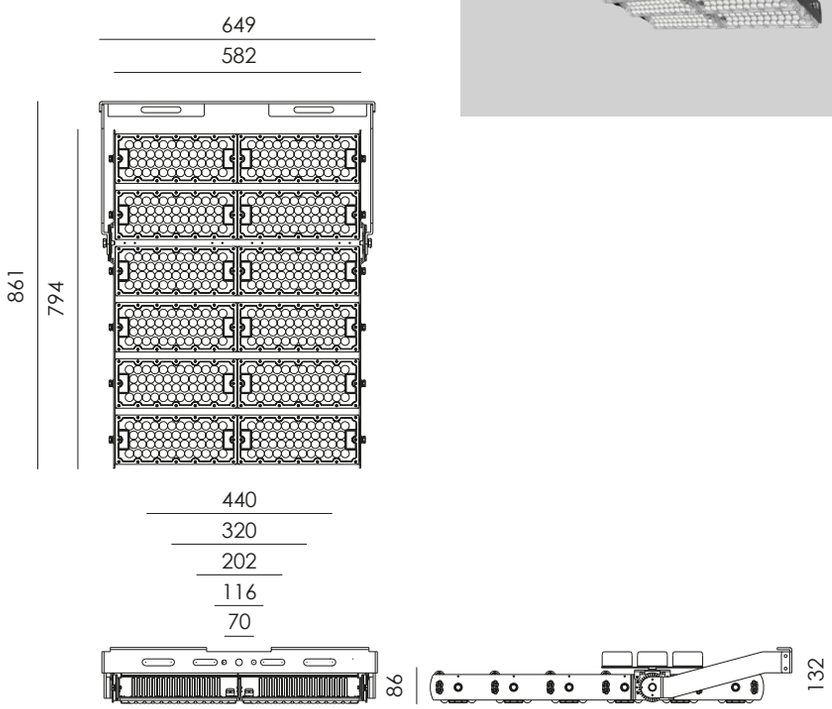

Finishing

BLACK

IP65

Lamp	Input	Power
LED	100-277Vac 50/60Hz	1440 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5488	**.** WITHOUT EM. KIT	**5** IP65	**C** 4000 K	**.MB** 1440 W	**CI** 50°x 90°	**1** ON / OFF	**.D** BLACK

CODE EXAMPLE:
Projector with light color at 4000K, IP65, 1440W, asymmetrical 50°x90°, ON/OFF control, frame black color without emergency kit **5488.5C.MBCI1.D**

MIRA 100

HIGH BAY

IP65

LED

100W

cod. 5293 /// MIRA 100

- *High bay LED projector*
- *Die-cast aluminium body*
- *Super brightness led Philips chip and high quality Lifud driver included*

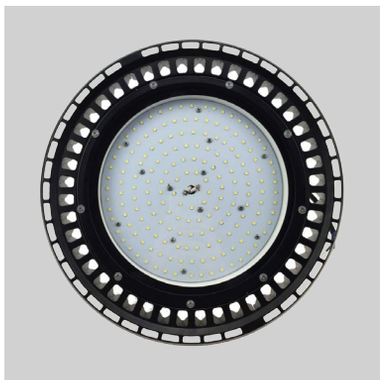

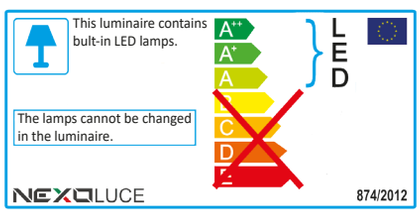

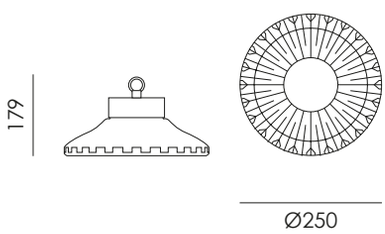

ACCESSORIES



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0114.0**

Finishing

BLACK

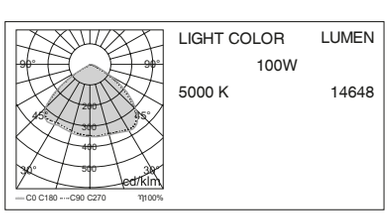

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	100 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5293	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**100** 100 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K				
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 3000K, IP65, 100W, 120° optic, ON/OFF control, frame black color without emergency kit **5293.5B100.Z1.D**

MIRA 150

HIGH BAY

IP65

LED

150W

cod. 5294 /// MIRA 150

cod. 5294 /// MIRA 150

- *High bay LED projector*
- *Die-cast aluminium body*
- *Super brightness led Philips chip and high quality Lifud driver included*

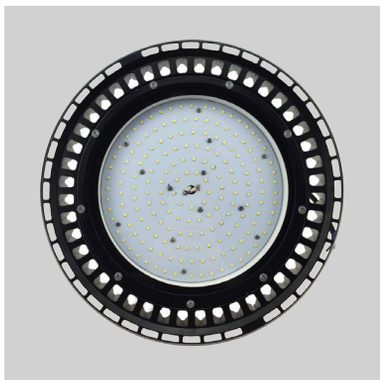

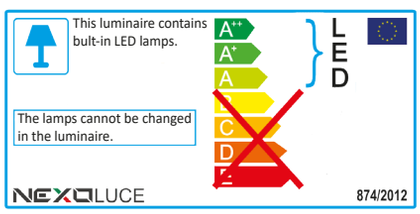

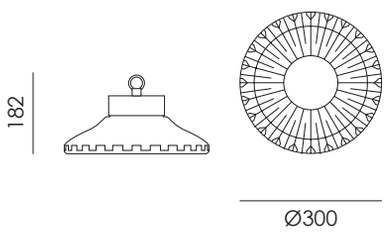

Finishing

BLACK

ACCESSORIES

SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0114.0**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	150 W

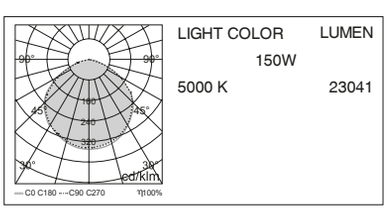

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5294	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**150** 150 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K				
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 3000K, IP65, 150W, 120° optic, ON/OFF control, frame black color without emergency kit **5294.5B150.Z1.D**

MIRA 200

HIGH BAY

IP65

LED

200W

cod. 5295 /// MIRA 200

- *High bay LED projector*
- *Die-cast aluminium body*
- *Super brightness led Philips chip and high quality Lifud driver included*

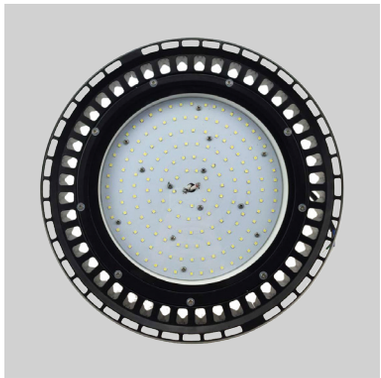

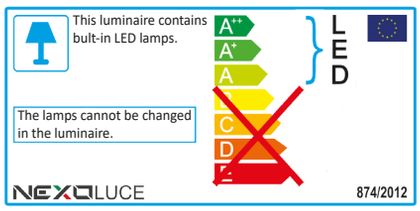

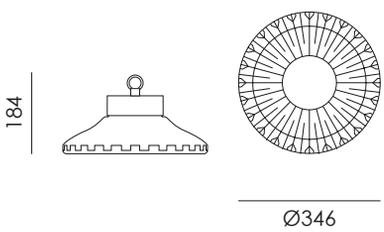

Finishing

BLACK

ACCESSORIES



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0114.0**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	200 W

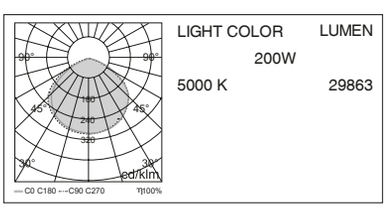

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5295	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**200** 200 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K				
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 3000K, IP65, 200W, 120° optic, ON/OFF control, frame black color without emergency kit **5295.5B200.Z1.D**

RIMESSA 60

HIGH BAY

IP65

LED

60W

cod. 5418 /// RIMESSA 60

cod. 5418 /// RIMESSA 60

- *High bay LED linear light*
- *Standard suspended mounting kit included (1,8mt length)*
- *Aluminium body*
- *Polycarbonate lens*
- *System efficacy up to 130lm/W*
- *Luminous flux 7800lm*
- *Available in black/red or silver color finishing*
- *Available with brackets for ceiling mounting (not included)*
- *Available with suspended mounting kit 5mt length (not included)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

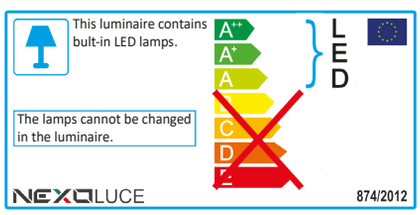









3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**

ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	60 W

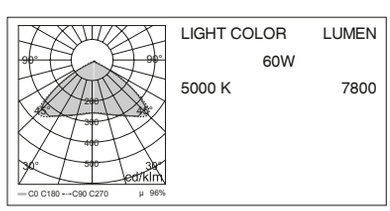

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5418	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.60** 60 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K			**7** DIMM. DALI	**AE** SILVER
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 5000K, IP65, 60W, 120° optic, ON/OFF control, frame silver color without emergency kit **5418.5D.60.Z1AE**

RIMESSA 90

HIGH BAY

IP65

LED

90W

cod. 5419 /// RIMESSA 90

cod. 5419 /// RIMESSA 90

- *High bay LED linear light*
- *Standard suspended mounting kit included (1,8mt length)*
- *Aluminium body*
- *Polycarbonate lens*
- *System efficacy up to 130lm/W*
- *Luminous flux 12150lm*
- *Available in black/red or silver color finishing*
- *Available with brackets for ceiling mounting (not included)*
- *Available with suspended mounting kit 5mt length (not included)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

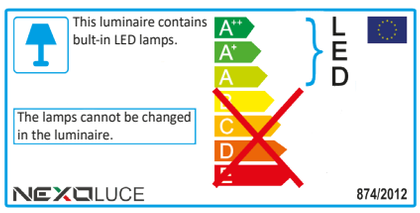



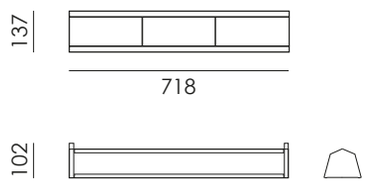





3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**

ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	90 W

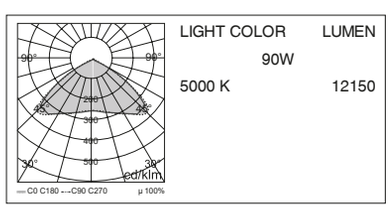

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5419	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.90** 90 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K			**7** DIMM. DALI	**AE** SILVER
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 5000K, IP65, 90W, 120° optic, ON/OFF control, frame silver color without emergency kit **5419.5D.90.Z1AE**

RIMESSA 120

HIGH BAY

IP65

LED

120W

cod. 5417 /// RIMESSA 120

cod. 5417 /// RIMESSA 120

- *High bay LED linear light*
- *Standard suspended mounting kit included (1,8mt length)*
- *Aluminium body*
- *Polycarbonate lens*
- *System efficacy up to 130lm/W*
- *Luminous flux 16200lm*
- *Available in black/red or silver color finishing*
- *Available with brackets for ceiling mounting (not included)*
- *Available with suspended mounting kit 5mt length (not included)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

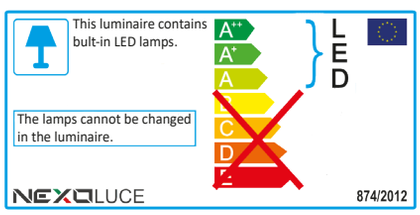



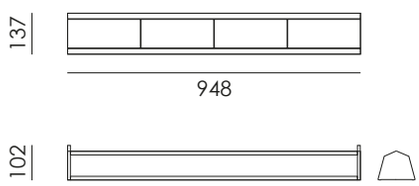





3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**

ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Kg 5.70

Lamp	Input	Power
LED	220/240Vac 50/60Hz	120 W



LIGHT COLOR	LUMEN
	120W
5000 K	16200

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5417	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**120** 120 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K			**7** DIMM. DALI	**AE** SILVER
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 5000K, IP65, 120W, 120° optic, ON/OFF control, frame silver color without emergency kit **5417.5D120.Z1AE**

RIMESSA 150

HIGH BAY

IP65

LED

150W

cod. 5420 /// RIMESSA 150

- *High bay LED linear light*
- *Standard suspended mounting kit included (1,8mt length)*
- *Aluminium body*
- *Polycarbonate lens*
- *System efficacy up to 130lm/W*
- *Luminous flux 20250lm*
- *Available in black/red or silver color finishing*
- *Available with brackets for ceiling mounting (not included)*
- *Available with suspended mounting kit 5mt length (not included)*
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

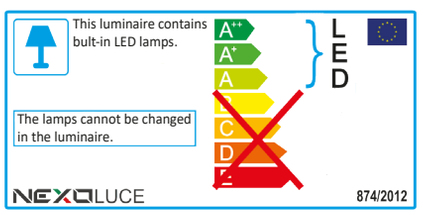



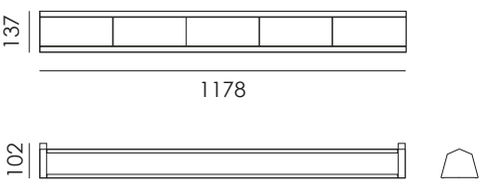



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**

ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0056.D - BLACK**
code: **003.0063AE - SILVER**

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	150 W



LIGHT COLOR	LUMEN
	150W
5000 K	20250

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5420	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**150** 150 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K			**7** DIMM. DALI	**AE** SILVER
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 5000K, IP65, 150W, 120° optic, ON/OFF control, frame silver color without emergency kit **5420.5D150.Z1AE**

RIMESSA 180

HIGH BAY

IP65

LED

180W

cod. 5422 /// RIMESSA 180

cod. 5422 /// RIMESSA 180

- *High bay LED linear light*
- *Standard suspended mounting kit included (1,8mt length)*
- *Aluminium body*
- *Polycarbonate lens*
- *System efficacy up to 130lm/W*
- *Luminous flux 24300lm*
- *Available in black/red or silver color finishing*
- *Available with brackets for ceiling mounting (not included)*
- *Available with suspended mounting kit 5mt length (not included)****
- *Ready for Plug&Play connection of 3Hrs Emergency kit (not included)**

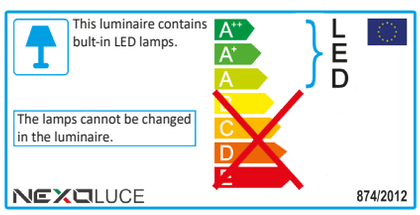



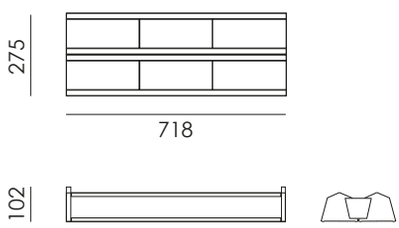

Finishing BLACK

Finishing SILVER



3 HOURS EMERGENCY KIT
7,2V/1,6Ah - IP65 METAL CASE
*(TO BE WIRED INSIDE THE FIXTURE)
code: **015.0015.0**



SUSPENDED MOUNTING KIT
5mt LENGTH
code: **003.0091.0**
***** 2 kits are required to suspend 1 5422 RIMESSA 180**

ACCESSORIES



CEILING INSTALLATION KIT
code: **003.0064.D** - BLACK
code: **003.0065AE** - SILVER

IP65

Lamp	Input	Power
LED	220/240Vac 50/60Hz	180 W

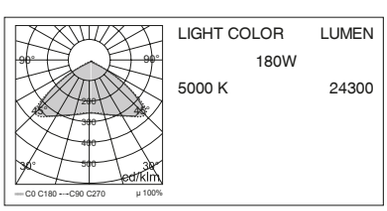

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5422	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**180** 180 W	**.Z** 120°	**1** ON / OFF	**.D** BLACK
			C 4000 K			**7** DIMM. DALI	**AE** SILVER
			D 5000 K				

CODE EXAMPLE:
High bay light with light color at 5000K, IP65, 180W, 120° optic, ON/OFF control, frame silver color without emergency kit **5422.5D180.Z1AE**

GUARDIA

PROJECTOR

IP65

XE

70W
100W
150W

cod. 5091 /// GUARDIA

cod. 5091 /// GUARDIA

- *Security monitoring projector with keyboard control*
- *Casting aluminium/ABS*
- *Toughened glass lampshade*
- *Joystick or keyboard control included*
- *Available with yoke with pan/tilt movement made in stainless steel*

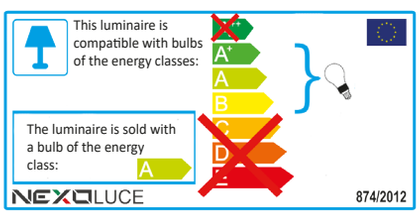



ACCESSORIES

YOKE WITH PAN/TILT MOVEMENT / *STAFFA PER MOVIMENTO PAN/TILT*
code / *codice:* **003.0108.G**

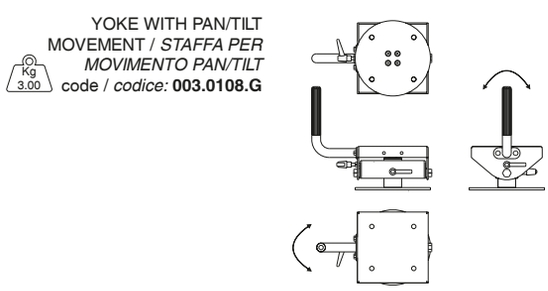

Finishing

SILVER

IP65

Lamp	Input	Power
HID XENON	220/240Vac 50/60Hz	70 / 100 / 150 W

LAMP INCLUDED

LAMP CHARACTERISTICS

POWER	FLUX
70W	7000lm
100W	10000lm
150W	15000lm

CRI Ra>95
EFFECTIVE RANGE 1500m
LAMP LIFETIME (HOURS) 6000h

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5091	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.70** 70 W	**.A** 6°	**1** ON / OFF	**AL** SILVER
			Q 6000 K	**100** 100 W			
			R 8000 K	**150** 150 W			

CODE EXAMPLE:
Projector with light color at 6000K, IP65, 100W, 6° optic, ON/OFF control, frame silver color without emergency kit **5091.5Q100.A1AL**

SIGNAGE

FUGA LED

SIGNAGE

IP40

LED

2,4W
2,6W
2,9W

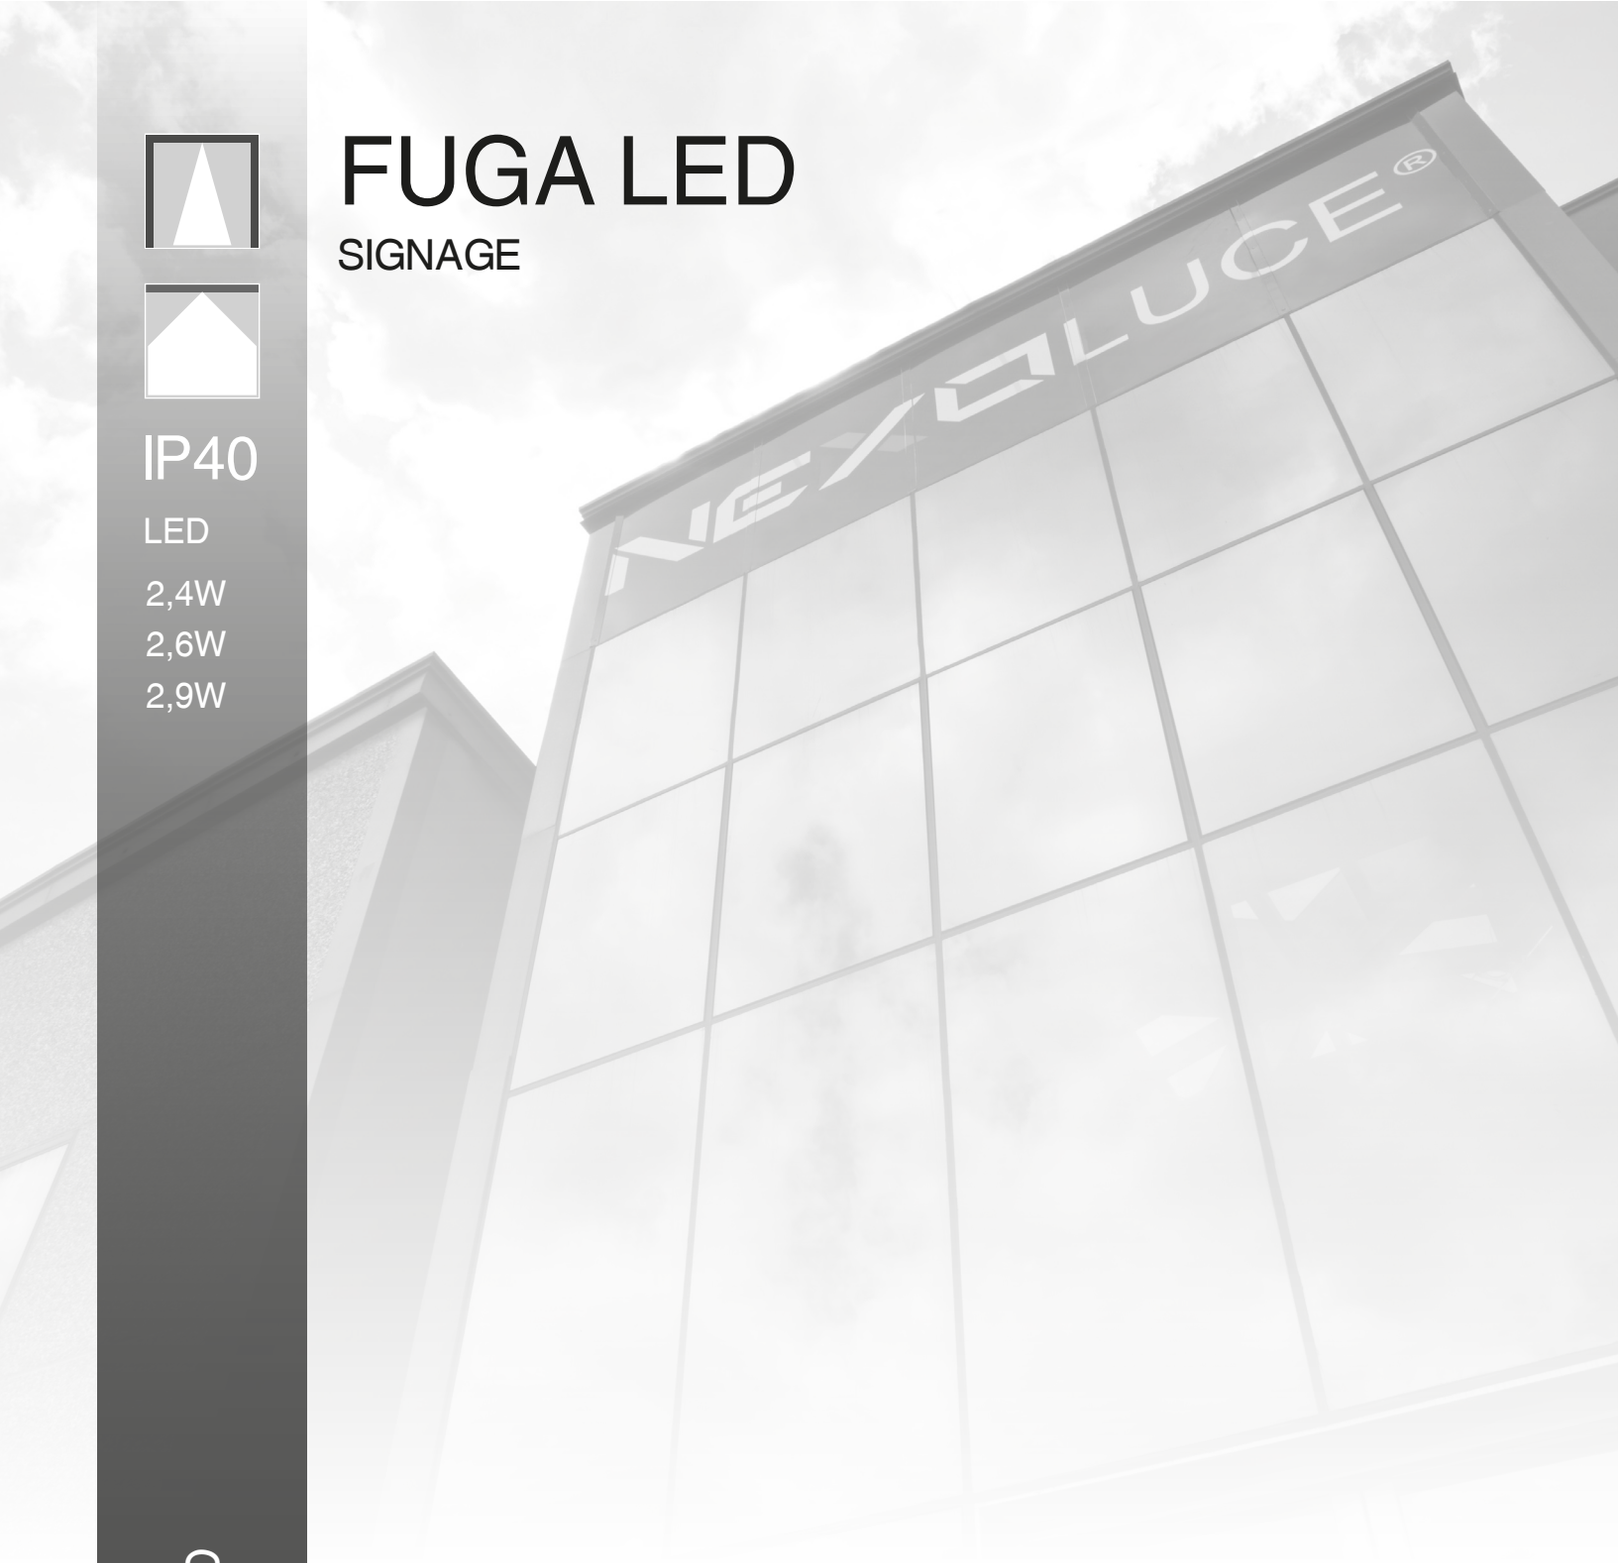

cod. 5298 /// FUGA LED

- *Spotlight emergency luminaires*
- *PC+ABS body*
- *Two Optics available: NARROW for corridors/escape routes and WIDE for open areas*
- *Recessed or surface mounting (accessories included)*
- *Available with 3 hours EM. kit integrated (non maintained) or configured for central battery system 230V AC (CBS 230V AC) and 24V DC (CBS 24V DC)*

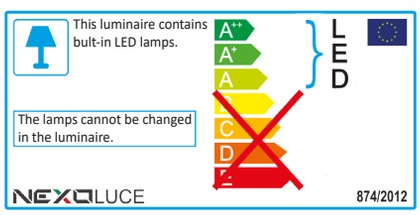

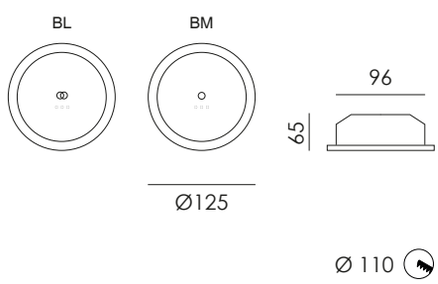

Finishing

WHITE

IP40 IK08

D VARIABLE X VARIABLE Y VARIABLE

Variable	Lamp	Input	Power
D	LED	220/240V AC 50/60Hz	2,4 W
X	LED	90-250V DC 120-250V AC 50/60Hz	2,6 W
Y	LED	15-27V DC	2,9 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5298	**D** 3H EM. KIT INTEGRATED (NON MAINTAINED)	**2** IP40	**C** 4000 K	**A24** 2,4 W (D VARIABLE ONLY)	**BL** NARROW (corridors)	**1** ON / OFF	**.A** WHITE
	X CBS 230V AC			**A26** 2,6 W (X VARIABLE ONLY)	**BM** WIDE (open areas)		
	Y CBS 24V DC			**A29** 2,9 W (Y VARIABLE ONLY)			

CODE EXAMPLE:
Spotlight em. luminaire white light color at 4000K, IP40, 2,4W, for corridors, ON/OFF control, frame white color with 3 hours em. kit (non maintained) **5298D2CA24BL1.A**

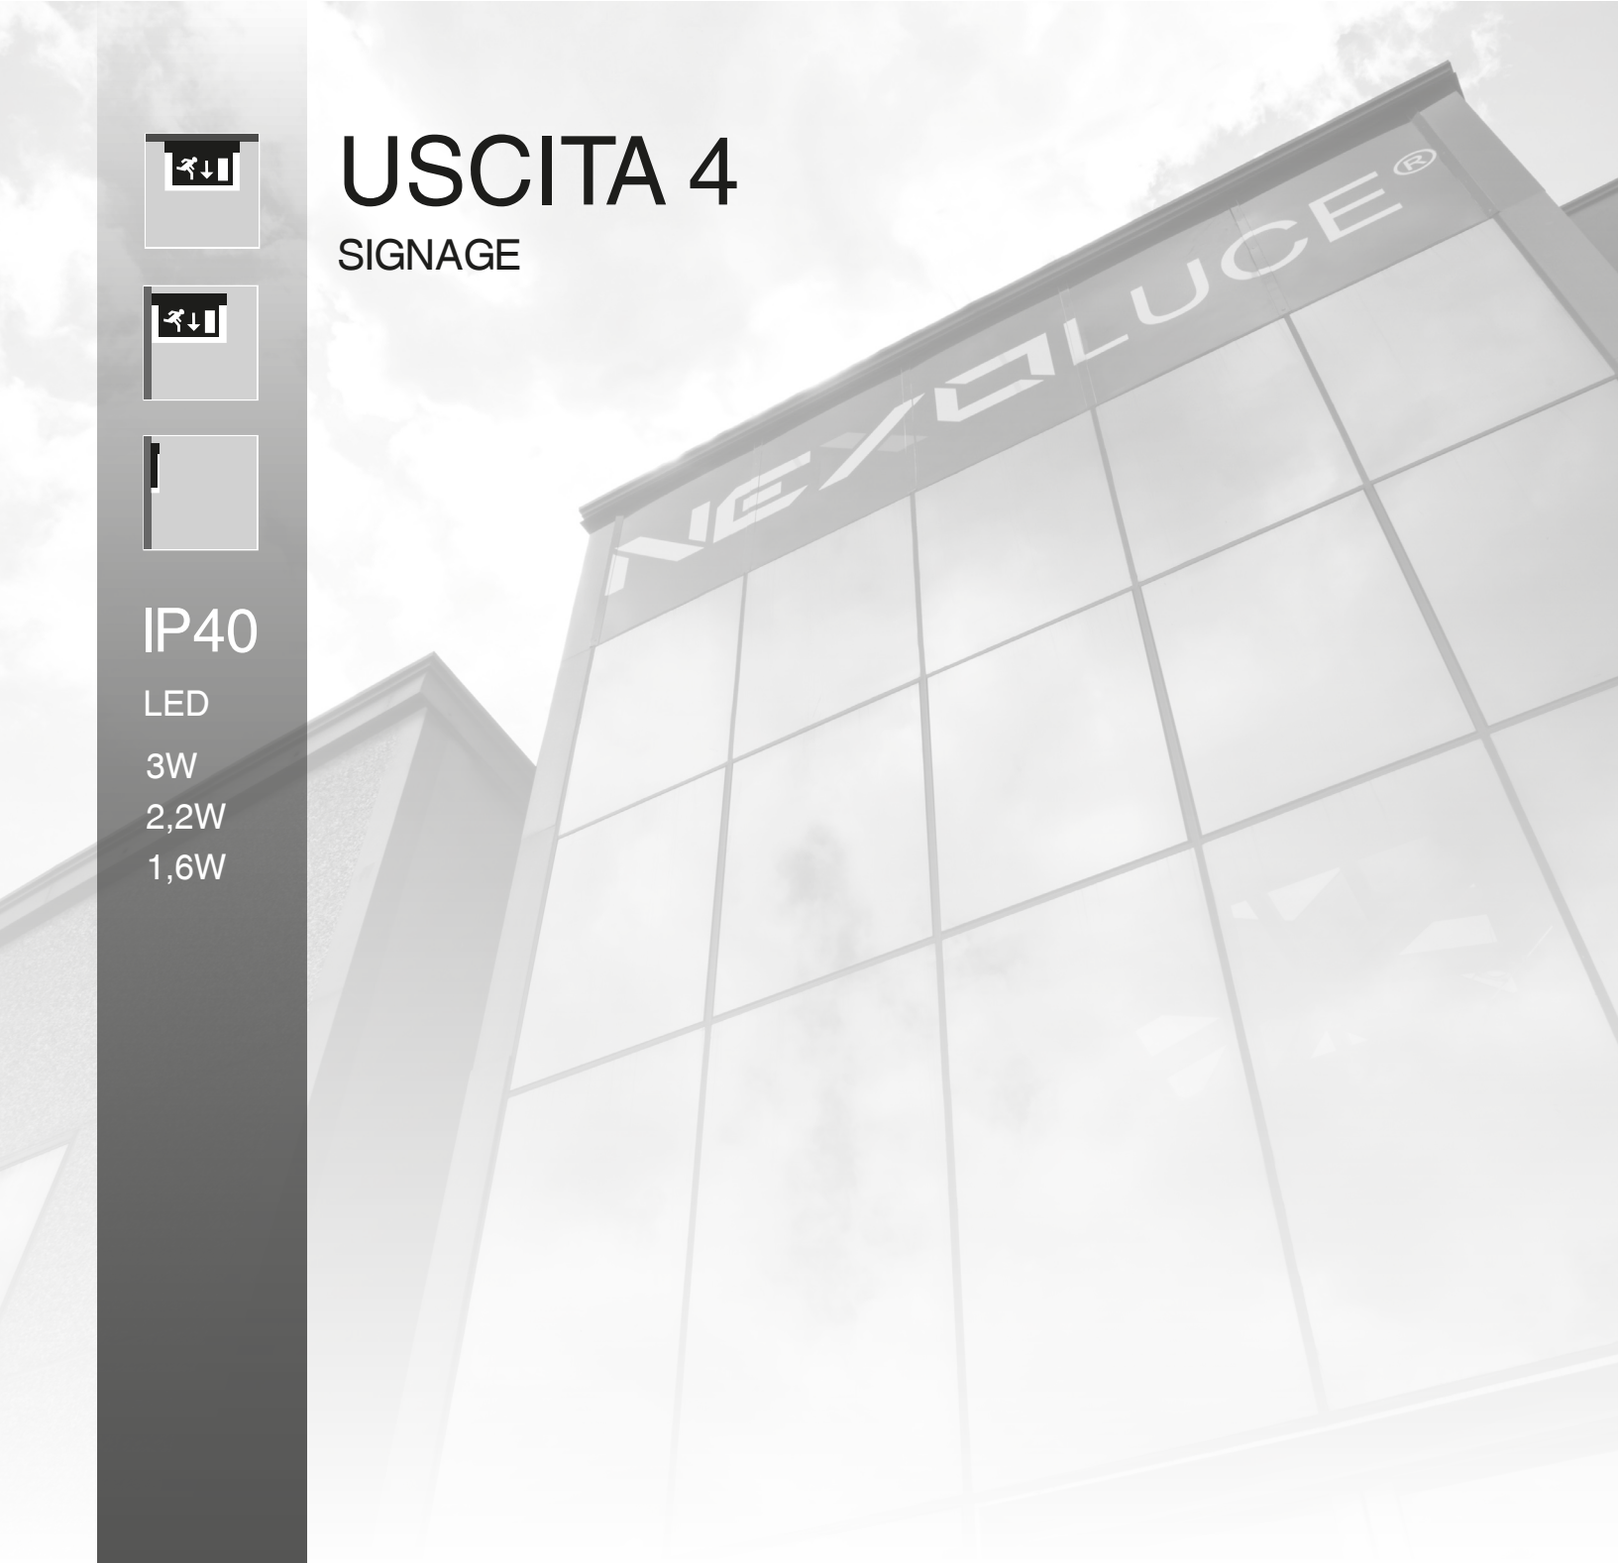

USCITA 4

SIGNAGE

IP40

LED

3W
2,2W
1,6W

cod. 5355 /// USCITA 4

- *Emergency exit light*
- *ABS body*
- *Wall or ceiling mounting (accessories included)*
- *Available with 3 hours EM. kit integrated (maintained or non maintained) or configured for central battery system 230V AC (CBS 230V AC) and 24V DC (CBS 24V DC)*
- *Standard or customized pictograms set available on request*
- *Recessed or suspension kit mounting available on request*

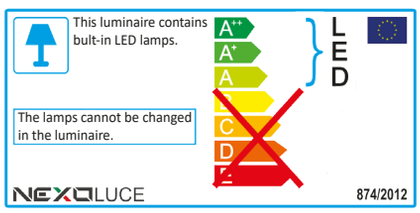

Finishing

WHITE

PICTOGRAMS SET (ON REQUEST)



code: **003.0057.0**



code: **003.0058.0**

code: **003.0073.0**



code: **003.0074.0**



code: **003.0075.0**

INSTALLATION KIT (ON REQUEST)

Recessed kit code: **003.0078.0**

Suspension kit with chain
code: **003.0079.0**

code: **003.0076.0**

code: **003.0077.0**

IP40 F Kg 0.85 C,D VARIABLES Kg 1.00 X,Y VARIABLE

Variable	Lamp	Input	Power
C, D	LED	220/240VAC 50/60Hz	3 W
X	LED	55-250V DC 100-250V AC 50/60Hz	2,2 W
Y	LED	24V DC	1,6 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5355	**C** 3H EM. KIT INTEGRATED (MAINTAINED)	**2** IP40	**C** 4000 K	**.03** 3 W (C,D VARIABLES)	**.L** NO LENS	**1** ON / OFF	**.A** WHITE
	D 3H EM. KIT INTEGRATED (NON MAINTAINED)			**A22** 2,2 W (X VARIABLE ONLY)			
	X CBS 230V AC			**A16** 1,6 W (Y VARIABLE ONLY)			
	Y CBS 24V DC						

CODE EXAMPLE:
Emergency exit light with white natural light color at 4000K, IP40, 3W, no lens, ON/OFF control, frame white color with 3 hours em. kit (maintained) **5355C2C.03.L1.A**

IP65

LED

4,5W

2,8W

2,0W

EMERGENZA IP65

SIGNAGE

cod. 5451 /// EMERGENZA IP65

cod. 5451 /// EMERGENZA IP65

- *Waterproof emergency light*
- *PC+ABS body*
- *Frosted polycarbonate diffuser*
- *Wall or ceiling mounting*
- *Available with 3 hours EM. kit integrated (maintained or non maintained) or configured for central battery system 230V AC (CBS 230V AC) and 24V DC (CBS 24V DC)*
- *Plastic double side diffuser kit available on request*
- *Standard or customized pictograms set available on request*

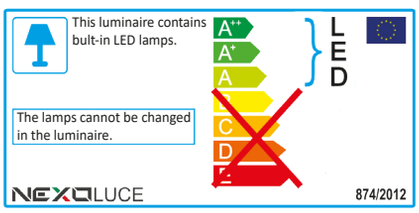

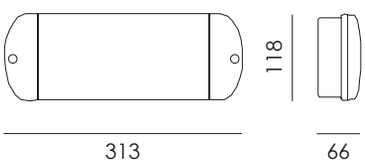

Finishing

WHITE

PICTOGRAMS SET (ON REQUEST)


code: **003.0208.0**


code: **003.0209.0**

code: **003.0210.0**



code: **003.0211.0**



code: **003.0212.0**

INSTALLATION KIT (ON REQUEST)

Plastic double side diffuser kit
code: **003.0207.0**

code: **003.0213.0**

code: **003.0214.0**

IP65 

Variable	Lamp	Input	Power
C, D	LED	220/240Vac 50/60Hz	4,5 W
X	LED	85-250V DC 100-250V AC 50/60Hz	2,8 W
Y	LED	15-30V DC	2,0 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5451	**C** 3H EM. KIT INTEGRATED (MAINTAINED)	**5** IP65	**C** 4000 K	**A45** 4,5 W (C,D VARIABLES)	**AG** FROSTED DIFFUSER	**1** ON / OFF	**.A** WHITE
	D 3H EM. KIT INTEGRATED (NON MAINTAINED)			**A28** 2,8 W (X VARIABLE ONLY)			
	X CBS 230V AC			**.02** 2,0 W (Y VARIABLE ONLY)			
	Y CBS 24V DC						

CODE EXAMPLE:
Waterproof emergency light white light color at 4000K, IP65, 4,5W, frosted diffuser, ON/OFF control, frame white color with 3 hours em. kit (maintained) **5451C5CA45AG1.A**

STRIP



IP20

IP65

LED

7W/m

cod. 5038 /// STRIP INLUX LED LB

STRIP INLUX LED LB

STRIP

cod. 5038 /// STRIP INLUX LED LB

- *Strip led low bright*
- *Silicon waterproof sleeve*
- *Adhesive tape for fixing*
- *Connecting cables*
- *Max lenght connectable 5 meters*

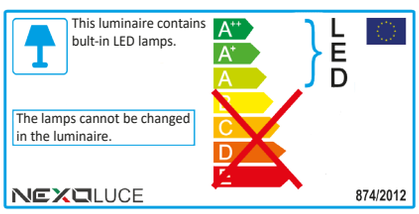

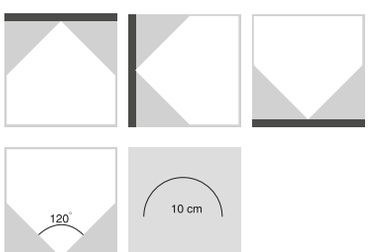

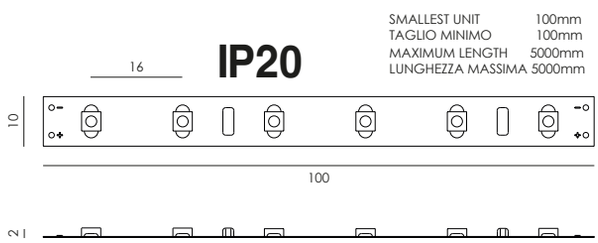

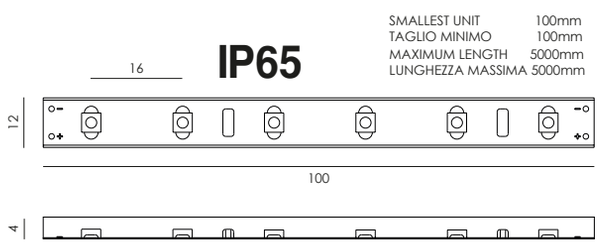

IP20
IP65

Lamp	Input	Power
LED	24 V DC	7 W / m

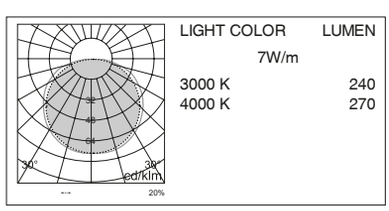

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	VERSION	CONTROL	LENGTH
5038	**1**	**1** IP20	**B** 3000 K	**.7M** 7 W / m	**MC** MALE CONNECTION	**6** 24 V DC	**50** 5.0 m
		5 IP65	**C** 4000 K		**MF** MALE-FEMALE CONNECTIONS		**XX** *m on request

CODE EXAMPLE:
Strip led with warm white light color at 3000K, IP20, 7W/m, male connection, 24VDC, 5.0m lenght **503811B.7MMC650**



IP20

IP65

LED

15W/m

cod. 5039 /// STRIP INLUX LED HB

STRIP INLUX LED HB

STRIP

cod. 5039 /// STRIP INLUX LED HB

- *Strip led high bright*
- *Silicon waterproof sleeve*
- *Adhesive tape for fixing*
- *Connecting cables*
- *Max lenght connectable 5 meters*

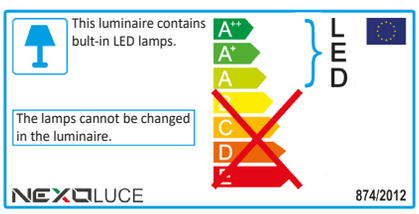

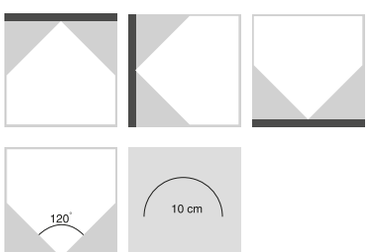

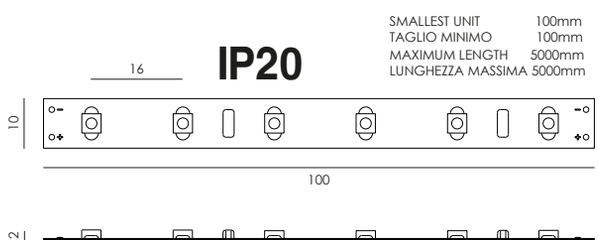

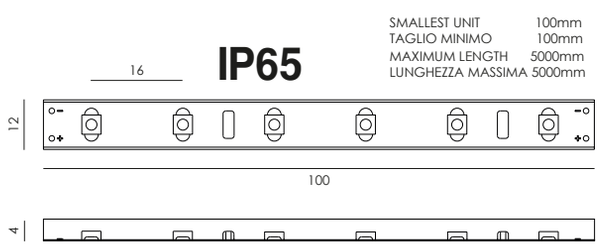

IP20
IP65

Lamp	Input	Power
LED	24 V DC	15 W / m

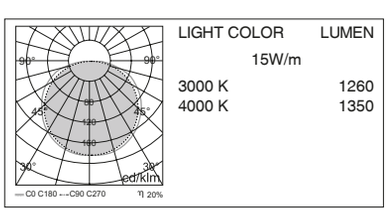

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	VERSION	CONTROL	LENGTH
5039	**1**	**1** IP20	**B** 3000 K	**15M** 15 W / m	**MC** MALE CONNECTION	**6** 24 V DC	**50** 5.0 m
		5 IP65	**C** 4000 K		**MF** MALE-FEMALE CONNECTIONS		**XX** *m on request

CODE EXAMPLE:
Strip led with warm white light color at 3000K, IP65, 15W/m, male connection, 24VDC, 5.0m lenght **503911B15MMC650**

RIGA LB

STRIP

IP20

IP65

LED

7W/m

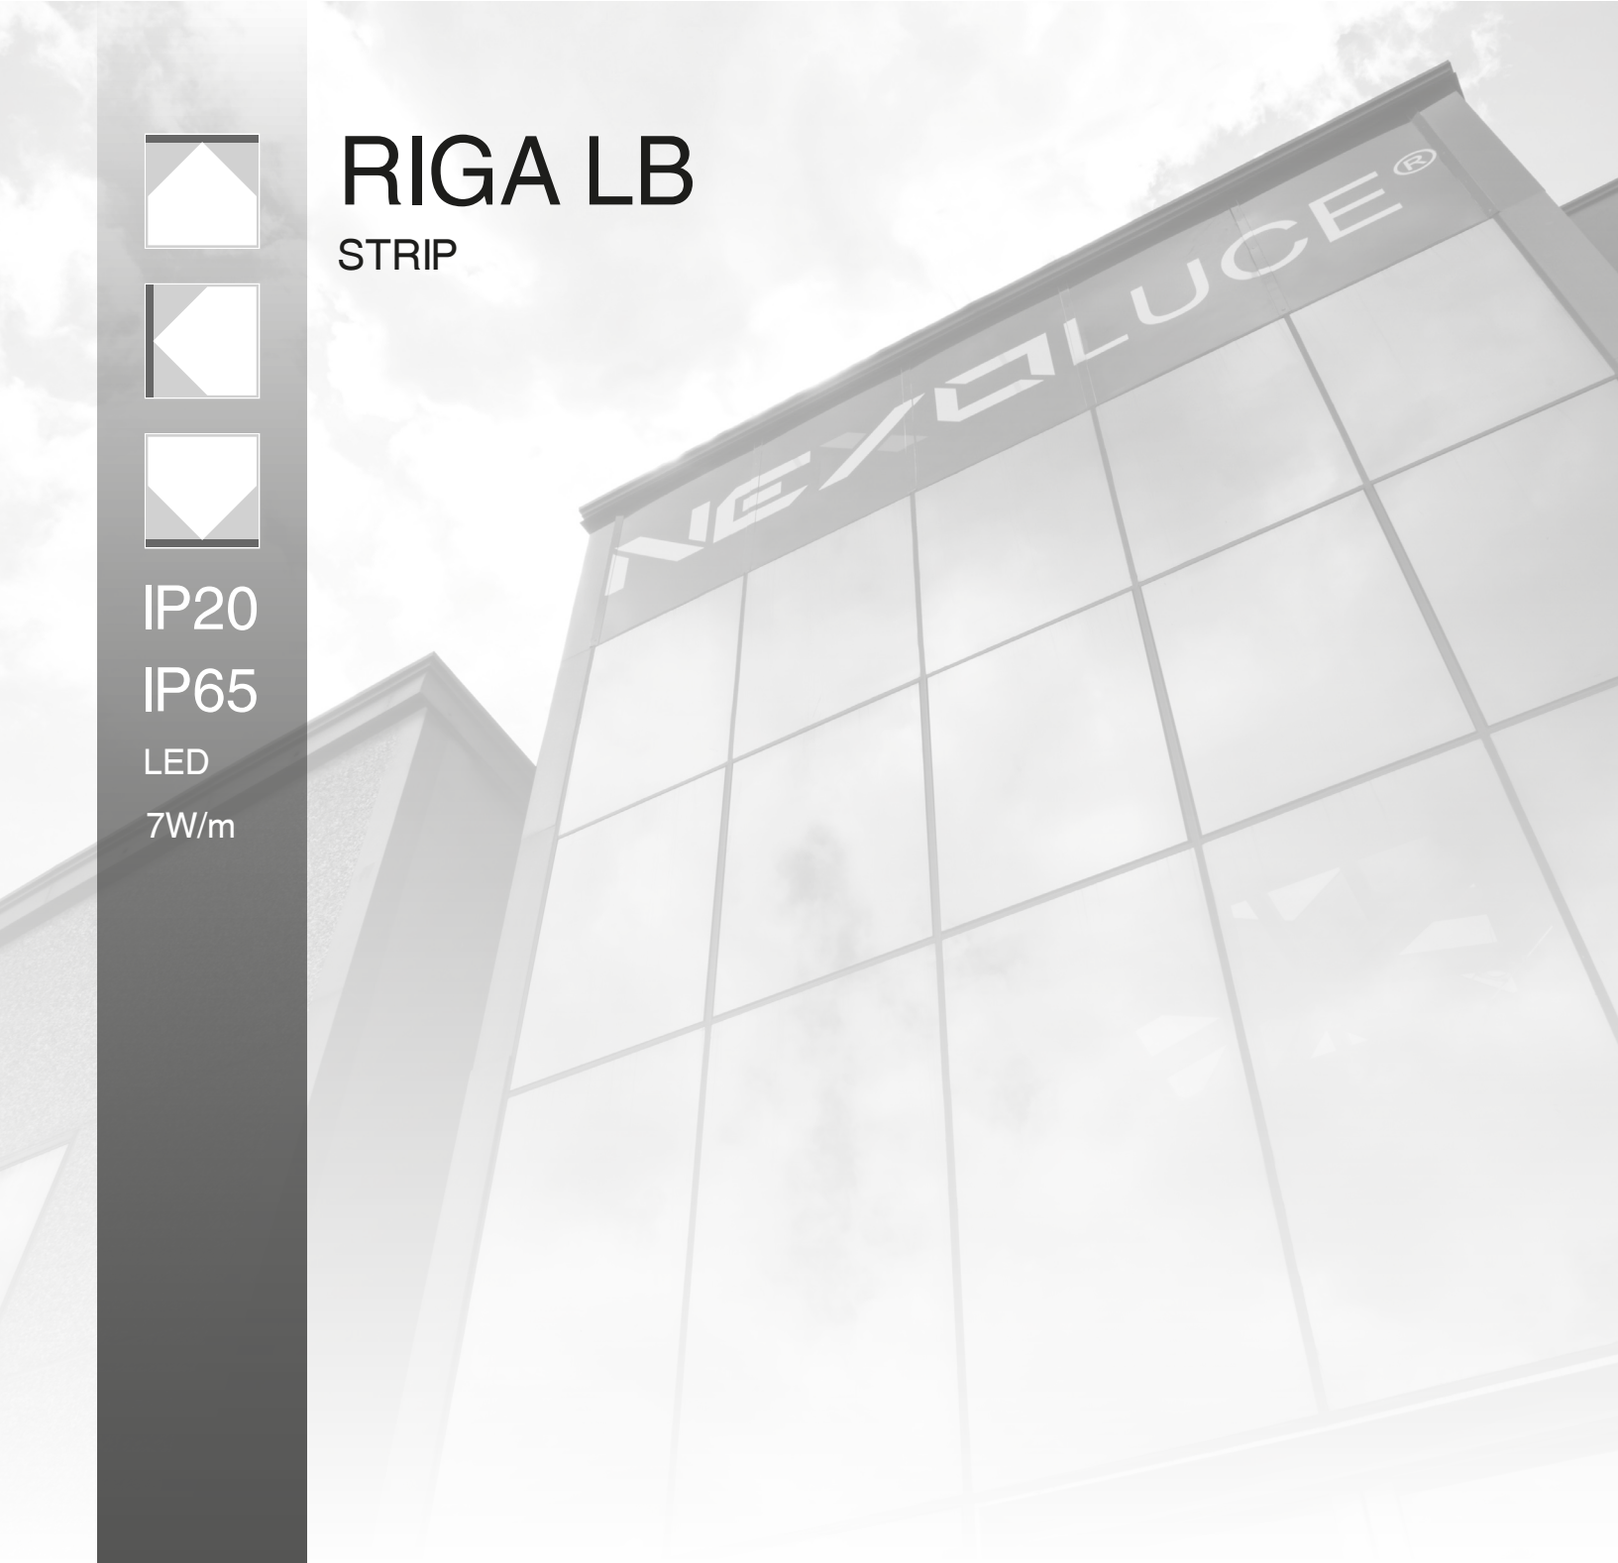

cod. 5115 /// RIGA LB

- *Strip led low bright*
- *Aluminium profile*
- *Waterproof silicone sleeve (only for outdoor version)*
- *Plastic clips for installation*
- *Connection plugs*
- *Polycarbonate cover*

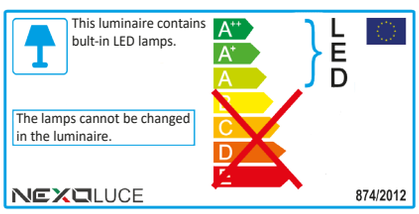

AVAILABLE SIZES
MISURE DISPONIBILI 500 / 1000 / 1500 / 2000 mm

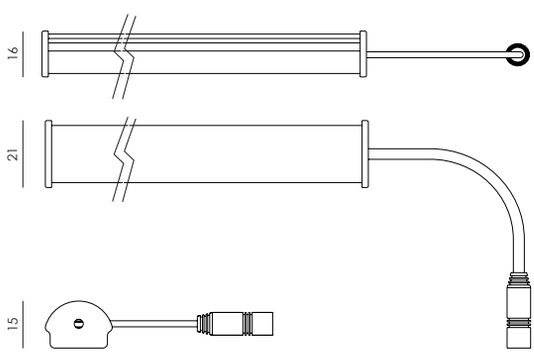

ACCESSORIES



CLIP 0° (1 pc)
code/codice: **003.0030.A**



CLIP 30° (1 pc)
code/codice: **003.0031.A**



CLIP 60° (1 pc)
code/codice: **003.0032.A**

IP20
IP65

Lamp	Input	Power
LED	24 V DC	7 W / m



LIGHT COLOR	LUMEN 7W/m
3000 K	240
4000 K	270

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5115	**1**	**1** IP20	**B** 3000 K	**.7M** 7 W / m	**.R** 120° CLEAR	**6** 24 V DC	**05** 0,5 m
		5 IP65	**C** 4000 K		**.S** 120° FROST		**10** 1,0 m
					.T 30° FROST		**15** 1,5 m
					.U 60° FROST		**20** 2,0 m
					.W 90° FROST		

CODE EXAMPLE:
Strip led into profile with warm white light color at 3000K, IP20, 7W/m, 120° clear optic, 24VDC, 1.0m lenght **511511B.7M.R610**

RIGA HB

STRIP

IP20

IP65

LED

15W/m

cod. 5306 /// RIGA HB

- *Strip led high bright*
- *Aluminium profile*
- *Waterproof silicone sleeve (only for outdoor version)*
- *Plastic clips for installation*
- *Connection plugs*
- *Polycarbonate cover*

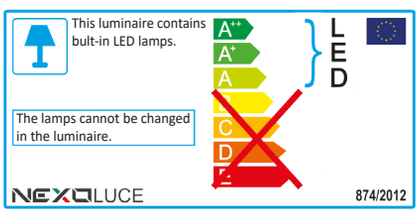

AVAILABLE SIZES
MISURE DISPONIBILI 500 / 1000 / 1500 / 2000 mm

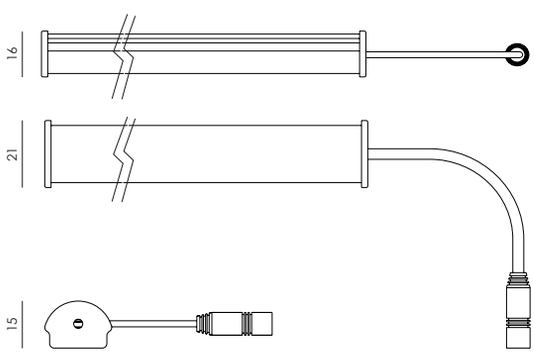

ACCESSORIES



CLIP 0° (1 pc)
code/codice: **003.0030.A**



CLIP 30° (1 pc)
code/codice: **003.0031.A**



CLIP 60° (1 pc)
code/codice: **003.0032.A**

IP20
IP65

Lamp	Input	Power
LED	24 V DC	15 W / m



LIGHT COLOR	LUMEN
15W/m	
3000 K	1260
4000 K	1350

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5306	**1**	**1** IP20	**B** 3000 K	**15M** 15 W / m	**.R** 120° CLEAR	**6** 24 V DC	**05** 0,5 m
		5 IP65	**C** 4000 K		**.S** 120° FROST		**10** 1,0 m
					.T 30° FROST		**15** 1,5 m
					.U 60° FROST		**20** 2,0 m
					.W 90° FROST		

CODE EXAMPLE:
Strip led into profile with warm white light color at 3000K, IP20, 15W/m, 120° clear optic, 24VDC, 1.0m lenght **530611B15M.R610**

RIGA INCASSO LB

STRIP

IP20

IP65

LED

7W/m

cod. 5301 /// RIGA INCASSO LB

cod. 5301 /// RIGA INCASSO LB

- *Strip led low bright*
- *Aluminium profile*
- *Waterproof silicone sleeve (only for outdoor version)*
- *Adhesive strip for fixing 3M (only for outdoor version)*
- *Plastic clips for installation*
- *Connection plugs*
- *Polycarbonate cover*

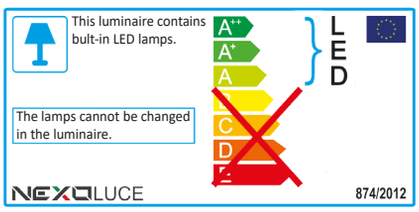

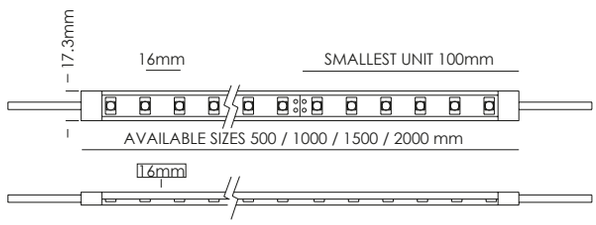

PROFILE



IP20
IP65

Lamp	Input	Power
LED	24 V DC	7 W / m



LIGHT COLOR	LUMEN 7W/m
3000 K	240
4000 K	270

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5301	**1**	**1** IP20	**B** 3000 K	**.7M** 7 W / m	**.R** 120° CLEAR	**6** 24 V DC	**05** 0,5 m
		5 IP65	**C** 4000 K		**.S** 120° FROST		**10** 1,0 m
					.T 30° FROST		**15** 1,5 m
					.U 60° FROST		**20** 2,0 m
					.W 90° FROST		

CODE EXAMPLE:
Strip led into profile with warm white light color at 3000K, IP20, 7W/m, 120° clear optic, 24VDC, 1.0m lenght **530111B.7M.R610**

RIGA INCASSO HB

STRIP

IP20

IP65

LED

15W/m

cod. 5065 /// RIGA INCASSO HB

cod. 5065 /// RIGA INCASSO HB

- *Strip led high bright*
- *Aluminium profile*
- *Waterproof silicone sleeve (only for outdoor version)*
- *Adhesive strip for fixing 3M (only for outdoor version)*
- *Plastic clips for installation*
- *Connection plugs*
- *Polycarbonate cover*

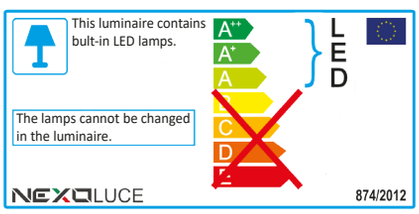

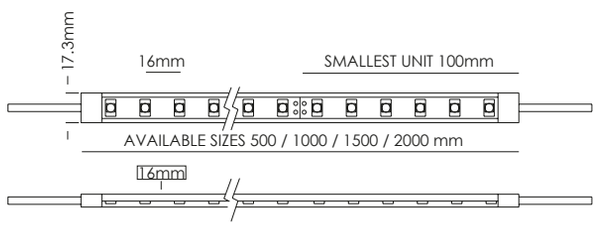

PROFILE



IP20
IP65

Lamp	Input	Power
LED	24 V DC	15 W / m



LIGHT COLOR	LUMEN
15W/m	
3000 K	1260
4000 K	1350

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5065	**1**	**1** IP20	**B** 3000 K	**15M** 15 W / m	**.R** 120° CLEAR	**6** 24 V DC	**05** 0,5 m
		5 IP65	**C** 4000 K		**.S** 120° FROST		**10** 1,0 m
					.T 30° FROST		**15** 1,5 m
					.U 60° FROST		**20** 2,0 m
					.W 90° FROST		

CODE EXAMPLE:
Strip led into profile with warm white light color at 3000K, IP20, 15W/m, 120° clear optic, 24VDC, 1.0m lenght **506511B15M.R610**

GOMMA H

STRIP

IP67

LED

12W/m

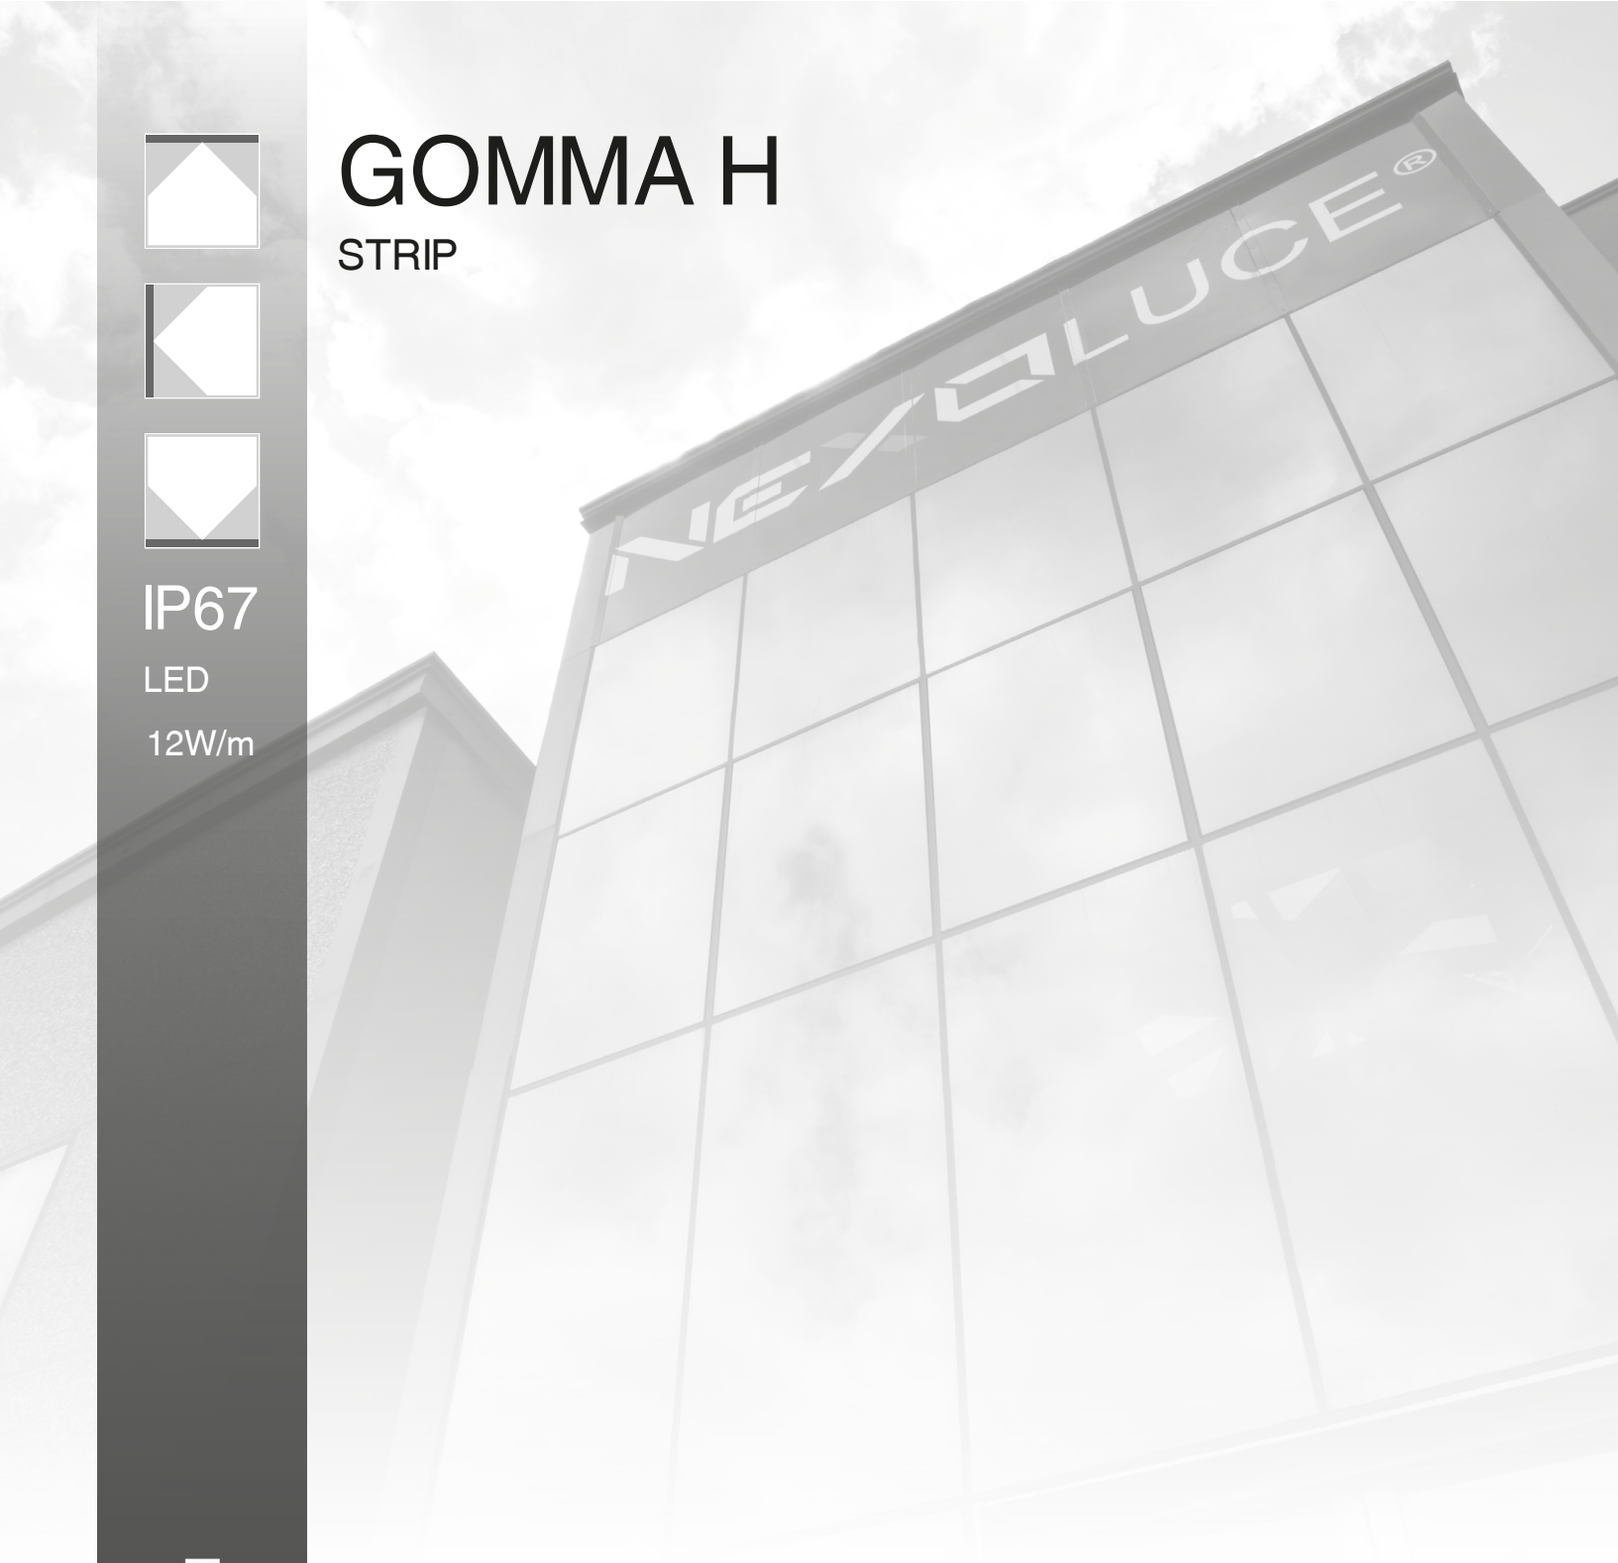

cod. 5035 /// GOMMA H

- *Horizontal flexible led linear light for indoor and outdoor installation*
- *Bending diameter of 300mm, beam angle 10% 160°*
- *UV, flame, solvents and saltwater resistant construction*
- *Injection-moulded input connector available in three positions (bottom, side and top end) with cable length 1m*
- *Injection-moulded end cap pre-installed*
- *Connecting cables and mounting profiles available on request*
- *Continuous length up to 10m by powering one end*
- *Minimum cutting length 55,6mm*
- *Power supply excluded*

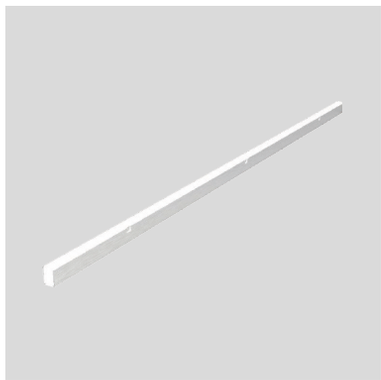

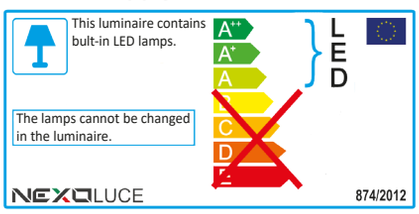

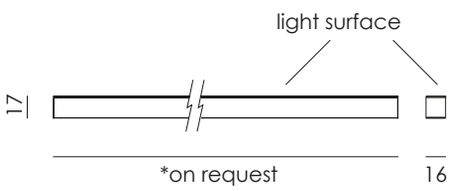

INJECTION-MOULDED INPUT CONNECTORS (RECOMMENDED, ASSEMBLED IN FACTORY)



S BOTTOM IN **T** SIDE IN **U** TOP END IN **V** NO IN

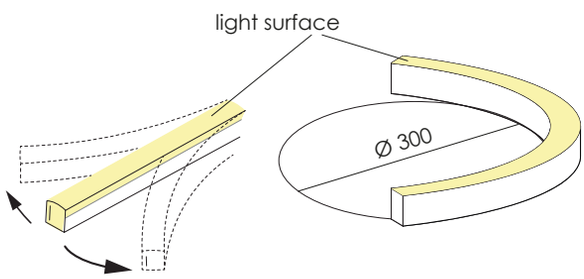

IP67 IK08

Lamp	Input	Power
SMD LED	24 V DC	12 W / m

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5035	**S** BOTTOM IN	**7** IP67	**B** 3000 K	**12M** 12 W / m	**AD** OPAL DIFFUSER	**6** 24 V DC	**M1** 10.0 m
	T SIDE IN		**C** 4000 K				**XX** *m on request
	U TOP END IN		**8** BLUE				
	V NO IN						

CODE EXAMPLE:
Linear led light with bottom in injection-moulded connector, with warm white light color at 3000K, IP67, 12W/m, 24VDC, 10.0m length **5035S7B12MAD6M1**

GOMMA V

STRIP

IP67

LED

12W/m

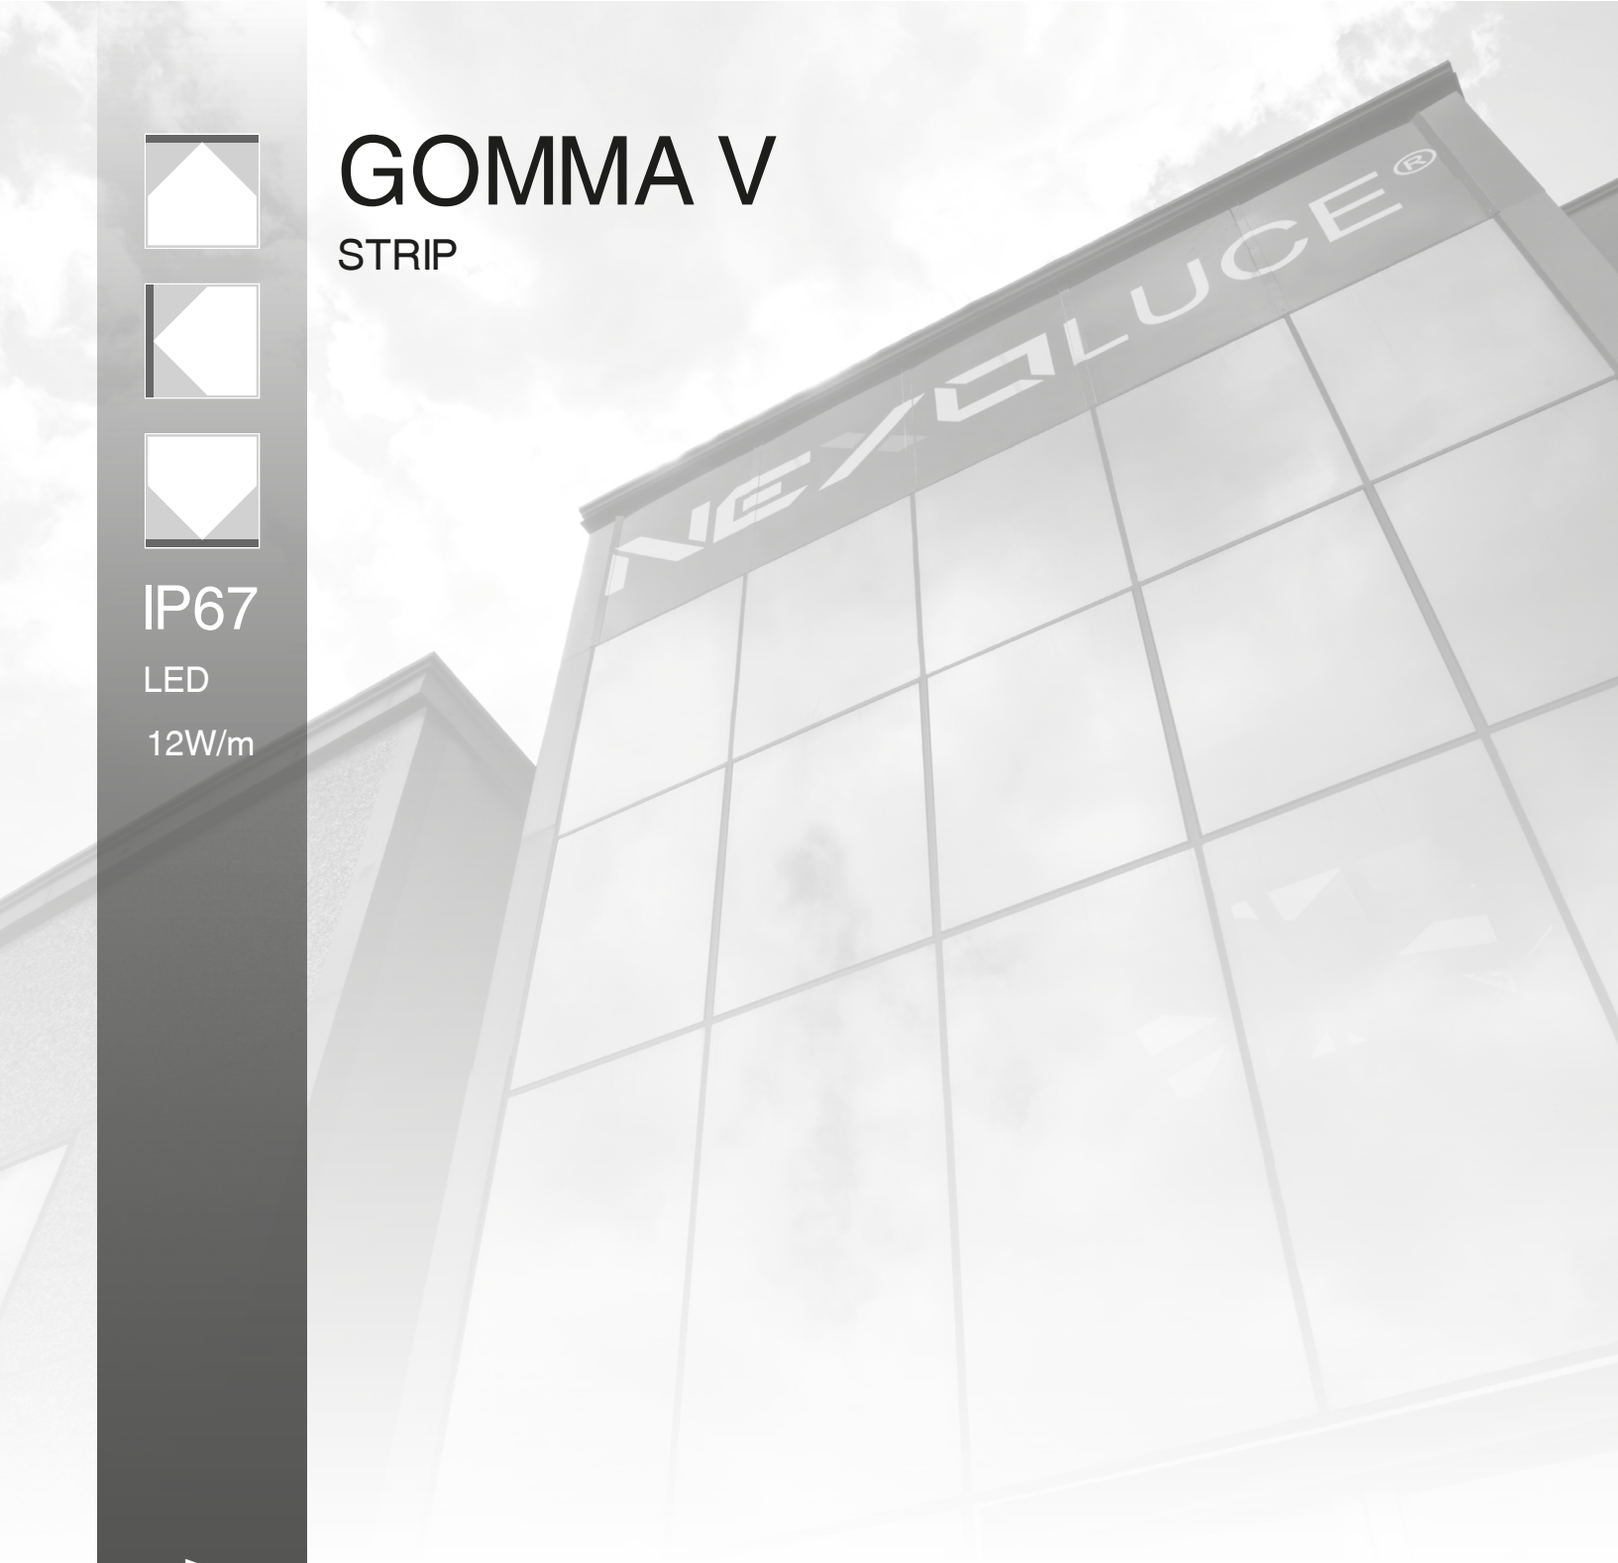

cod. 5034 /// GOMMA V

- *Vertical flexible led linear light for indoor and outdoor installation*
- *Bending diameter of 300mm, beam angle 10% 160°*
- *UV, flame, solvents and saltwater resistant construction*
- *Injection-moulded input connector available in three positions (bottom, side and top end) with cable length 1m*
- *Injection-moulded end cap pre-installed*
- *Connecting cables and mounting profiles available on request*
- *Continuous length up to 10m by powering one end*
- *Minimum cutting length 55,6mm*
- *Power supply excluded*

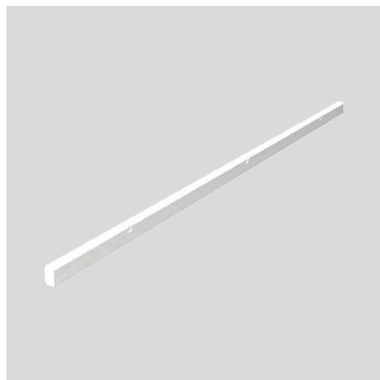

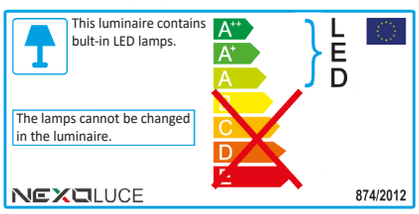

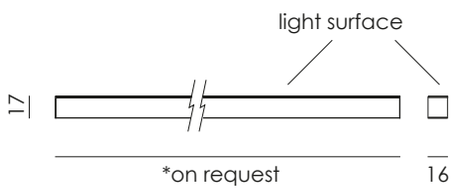

INJECTION-MOULDED INPUT CONNECTORS (RECOMMENDED, ASSEMBLED IN FACTORY)

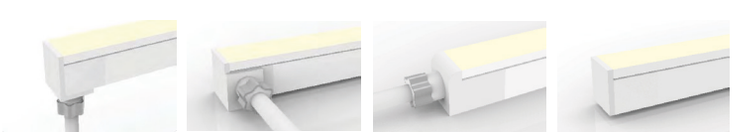

S BOTTOM IN **T** SIDE IN **U** TOP END IN **V** NO IN

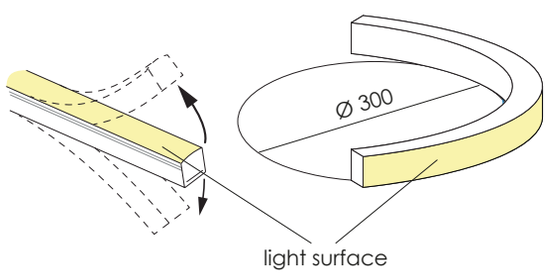

IP67 IK08

Lamp	Input	Power
SMD LED	24 V DC	12 W / m

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5034	**S** BOTTOM IN	**7** IP67	**B** 3000 K	**12M** 12 W / m	**AD** OPAL DIFFUSER	**6** 24 V DC	**M1** 10.0 m
	T SIDE IN		**C** 4000 K				**XX** *m on request
	U TOP END IN		**8** BLUE				
	V NO IN						

CODE EXAMPLE:
Linear led light with bottom in injection-moulded connector, with warm white light color at 3000K, IP67, 12W/m, 24VDC, 10.0m length **5034S7B12MAD6M1**

RIGA SCALA

STRIP

IP20

LED

3W/m

cod. 2106 /// RIGA SCALA

cod. 2106 /// RIGA SCALA

- *Aluminium anodized profile with linear led light on the top for segnaling stairs in dark places such as theatre and cinema auditoriums*
- *Fixing to the finished edge on the stairs with screws or glue*
- *No visible led spot*
- *Available with: input and letter on the right (RIGHT PS&L), input and letter on the left (LEFT PS&L), input on the right and no letter (RIGHT PSNL), input on the left and no letter (LEFT PSNL)*
- *Power supply excluded*

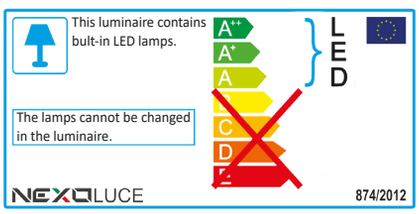

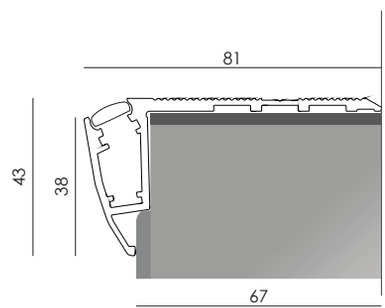

Finishing

BLACK

ACCESSORIES

LETTER/NUMBER FOR LINEA SCALA (1 pc)
code/codice: **003.0111.0**

IP20

Lamp	Input	Power
LED	24 V DC	3 W / m

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
2106	**M** RIGHT PS&L	**1** IP20	**7** RED FILTER	**03M** 3 W / m	**.L** NO LENS	**6** 24 V DC	**13** 1,3 m
	N LEFT PS&L		**L** BLUE FILTER				**16** 1,6 m
	P RIGHT PSNL						**17** 1,7 m
	Q LEFT PSNL						

CODE EXAMPLE:
Linea Scala with right power supply and letter, IP20, with red filter light color, 3W/m, no lens optic, 24VDC, 1.3m lenght **2106M1703M.L613**

TRACK

IP20

LED

15W

FRECCIA S

TRACK

cod. 5432 /// FRECCIA S

cod. 5432 /// FRECCIA S

- *Track mounted LED projector*
- *Die-cast aluminium and thermoplastic material body*
- *3 circuit track adaptor universally compatible with the main international track brands*
- *Total lighting output: 1300 lm*
- *Luminous efficacy: >90 lm/W*
- *Life Time: 50.000hrs L80 B10 (Ta 40°C)*
- *CRI: 80Ra*
- *PF>0.9*

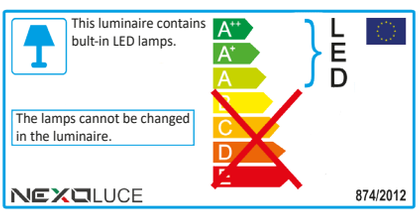





IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	15 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5432	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.15** 15 W	**BC** 15°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**CN** 28°	**0** DIMMER 0-10V	**.D** BLACK
					BD 38°		

CODE EXAMPLE:
Projector with light color at 3000K, IP20, 15W, 15° optic, ON/OFF control, white color, without emergency kit **5432.1B.15BC1.A**

IP20

LED

25W

FRECCIA M

TRACK

cod. 5433 /// FRECCIA M

cod. 5433 /// FRECCIA M

- *Track mounted LED projector*
- *Die-cast aluminium and thermoplastic material body*
- *3 circuit track adaptor universally compatible with the main international track brands*
- *Total lighting output: 2200 lm*
- *Luminous efficacy: >90 lm/W*
- *Life Time: 50.000hrs L80 B10 (Ta 40°C)*
- *CRI: 80Ra*
- *PF>0.9*

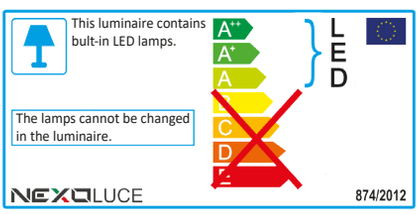





IP20 

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	25 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5433	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.25** 25 W	**CM** 18°	**1** ON / OFF	**.A** WHITE
			C 4000 K		**CN** 28°	**0** DIMMER 0-10V	**.D** BLACK
					BP 43°	**7** DIM. DALI	

CODE EXAMPLE:
Projector with light color at 3000K, IP20, 25W, 18° optic, ON/OFF control, white color, without emergency kit **5433.1B.25CM1.A**

IP20

LED

30/40W

FRECCIA L

TRACK

cod. 5434 /// FRECCIA L

cod. 5434 /// FRECCIA L

- *Track mounted LED projector*
- *Die-cast aluminium and thermoplastic material body*
- *3 circuit track adaptor universally compatible with the main international track brands*
- *Total lighting output: 2700 / 3600 lm*
- *Luminous efficacy: >90 lm/W*
- *Life Time: 50.000hrs L80 B10 (Ta 40°C)*
- *CRI: 80Ra*
- *PF>0.9*

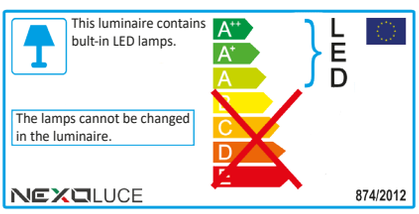



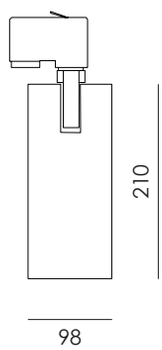

IP20

Lamp	Input	Power
LED COB	220/240Vac 50/60Hz	30 / 40 W

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5434	**.** WITHOUT EM. KIT	**1** IP20	**B** 3000 K	**.30** 30 W	**CM** 18°	**1** ON / OFF	**.A** WHITE
			C 4000 K	**.40** 40 W	**CN** 28°	**0** DIMMER 0-10V	**.D** BLACK
					BP 43°	**7** DIM. DALI	

CODE EXAMPLE:
Projector with light color at 3000K, IP20, 30W, 18° optic, ON/OFF control, white color, without emergency kit **5434.1B.30CM1.A**





IP20

BINARIO 2

TRACK

- *Electrified tracks three phase, with 3 circuits*
- *ON/OFF, DALI and DIMM 0/10V control on the same track*
- *Extruded aluminium body*
- *Copper electrical cables insulated in extruded PVC profile*
- *Ceiling or suspended installation*
- *Available track lengths: 1000mm, 2000mm (+/-5mm)*

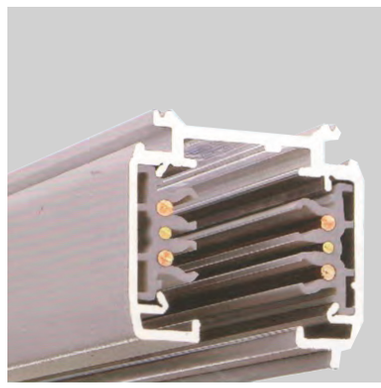

SINGLE PHASE 220/240V
IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 3680W DIVIDED AMONG THE 3 CIRCUITS

THREE PHASE 220/240V
IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 11040W DIVIDED AMONG THE 3 CIRCUITS

MONOFASE 220/240V
CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 3680W SUDDIVISI SU 3 CIRCUITI

TRIFASE 220/240V
CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 11040W SUDDIVISI SU 3 CIRCUITI

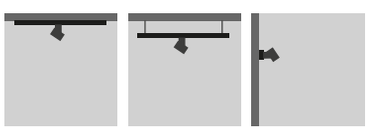

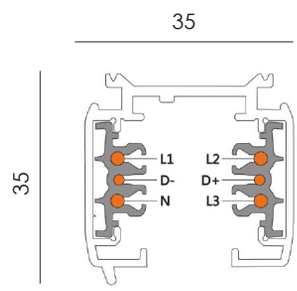

MAXIMUM LOAD / *CARICO MASSIMO*

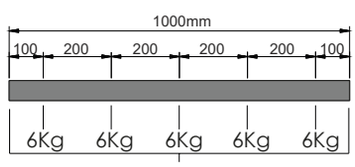

Fixing point /
Punto di fissaggio

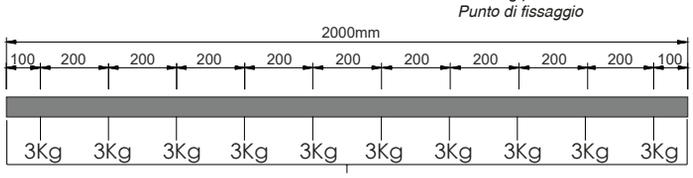

Fixing point /
Punto di fissaggio

IP20

Input / *Alimentazione* 220/240V - 50/60 Hz

ACCESSORIES PAGE 466

CODE	LENGHT	FRAME COLOR
001.0019.A	1000mm	**.A** WHITE
001.0020.A	2000mm	**.D** BLACK
001.0021.D	1000mm	
001.0022.D	2000mm	

CODE EXAMPLE:
Electrified track three phase, ceiling installation, lenght 1000mm, white frame color **001.0019.A**

BINARIO 2 R

TRACK

IP20

BINARIO 2 R

BINARIO 2 R

- *Electrified tracks three phase, with 3 circuits*
- *ON/OFF, DALI and DIMM 0/10V control on the same track*
- *Extruded aluminium body*
- *Copper electrical cables insulated in extruded PVC profile*
- *Recessed installation*
- *Available track lengths: 1000mm, 2000mm (+/-5mm)*

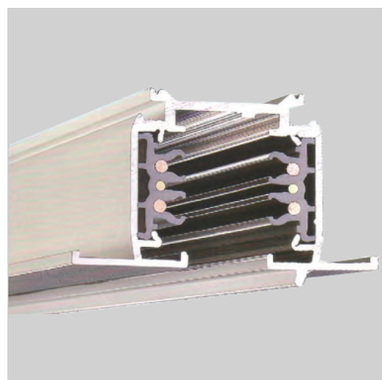

SINGLE PHASE 220/240V
IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 3680W DIVIDED AMONG THE 3 CIRCUITS

THREE PHASE 220/240V
IT ALLOWS A TOTAL LOAD OF 16A CORRESPONDING TO 11040W DIVIDED AMONG THE 3 CIRCUITS

MONOFASE 220/240V
CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 3680W SUDDIVISI SU 3 CIRCUITI

TRIFASE 220/240V
CONSENTE UN CARICO TOTALE DI 16A CHE CORRISPONDONO A 11040W SUDDIVISI SU 3 CIRCUITI



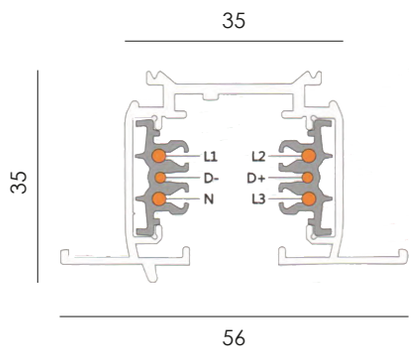

MAXIMUM LOAD / CARICO MASSIMO



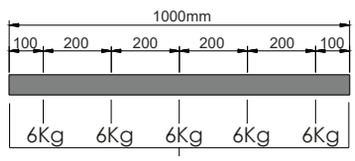

Fixing point /
Punto di fissaggio

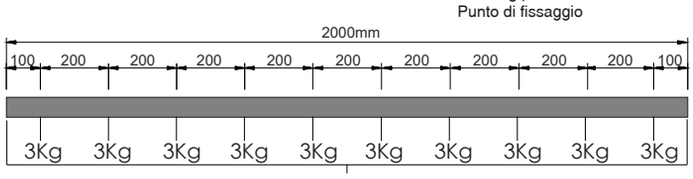

Fixing point /
Punto di fissaggio

IP20 Kg/m 1,20

Input / Alimentazione 220/240V - 50/60 Hz

ACCESSORIES PAGE 468

CODE	LENGHT	FRAME COLOR
001.0023.A	1000mm	**.A** WHITE
001.0024.A	2000mm	**.D** BLACK
001.0025.D	1000mm	
001.0026.D	2000mm	

CODE EXAMPLE:
Electrified track three phase, recessed installation, lenght 1000mm, white frame color **001.0023.A**

ACCESSORIES

GOMMA H

STRIP

IP67

LED

12W/m

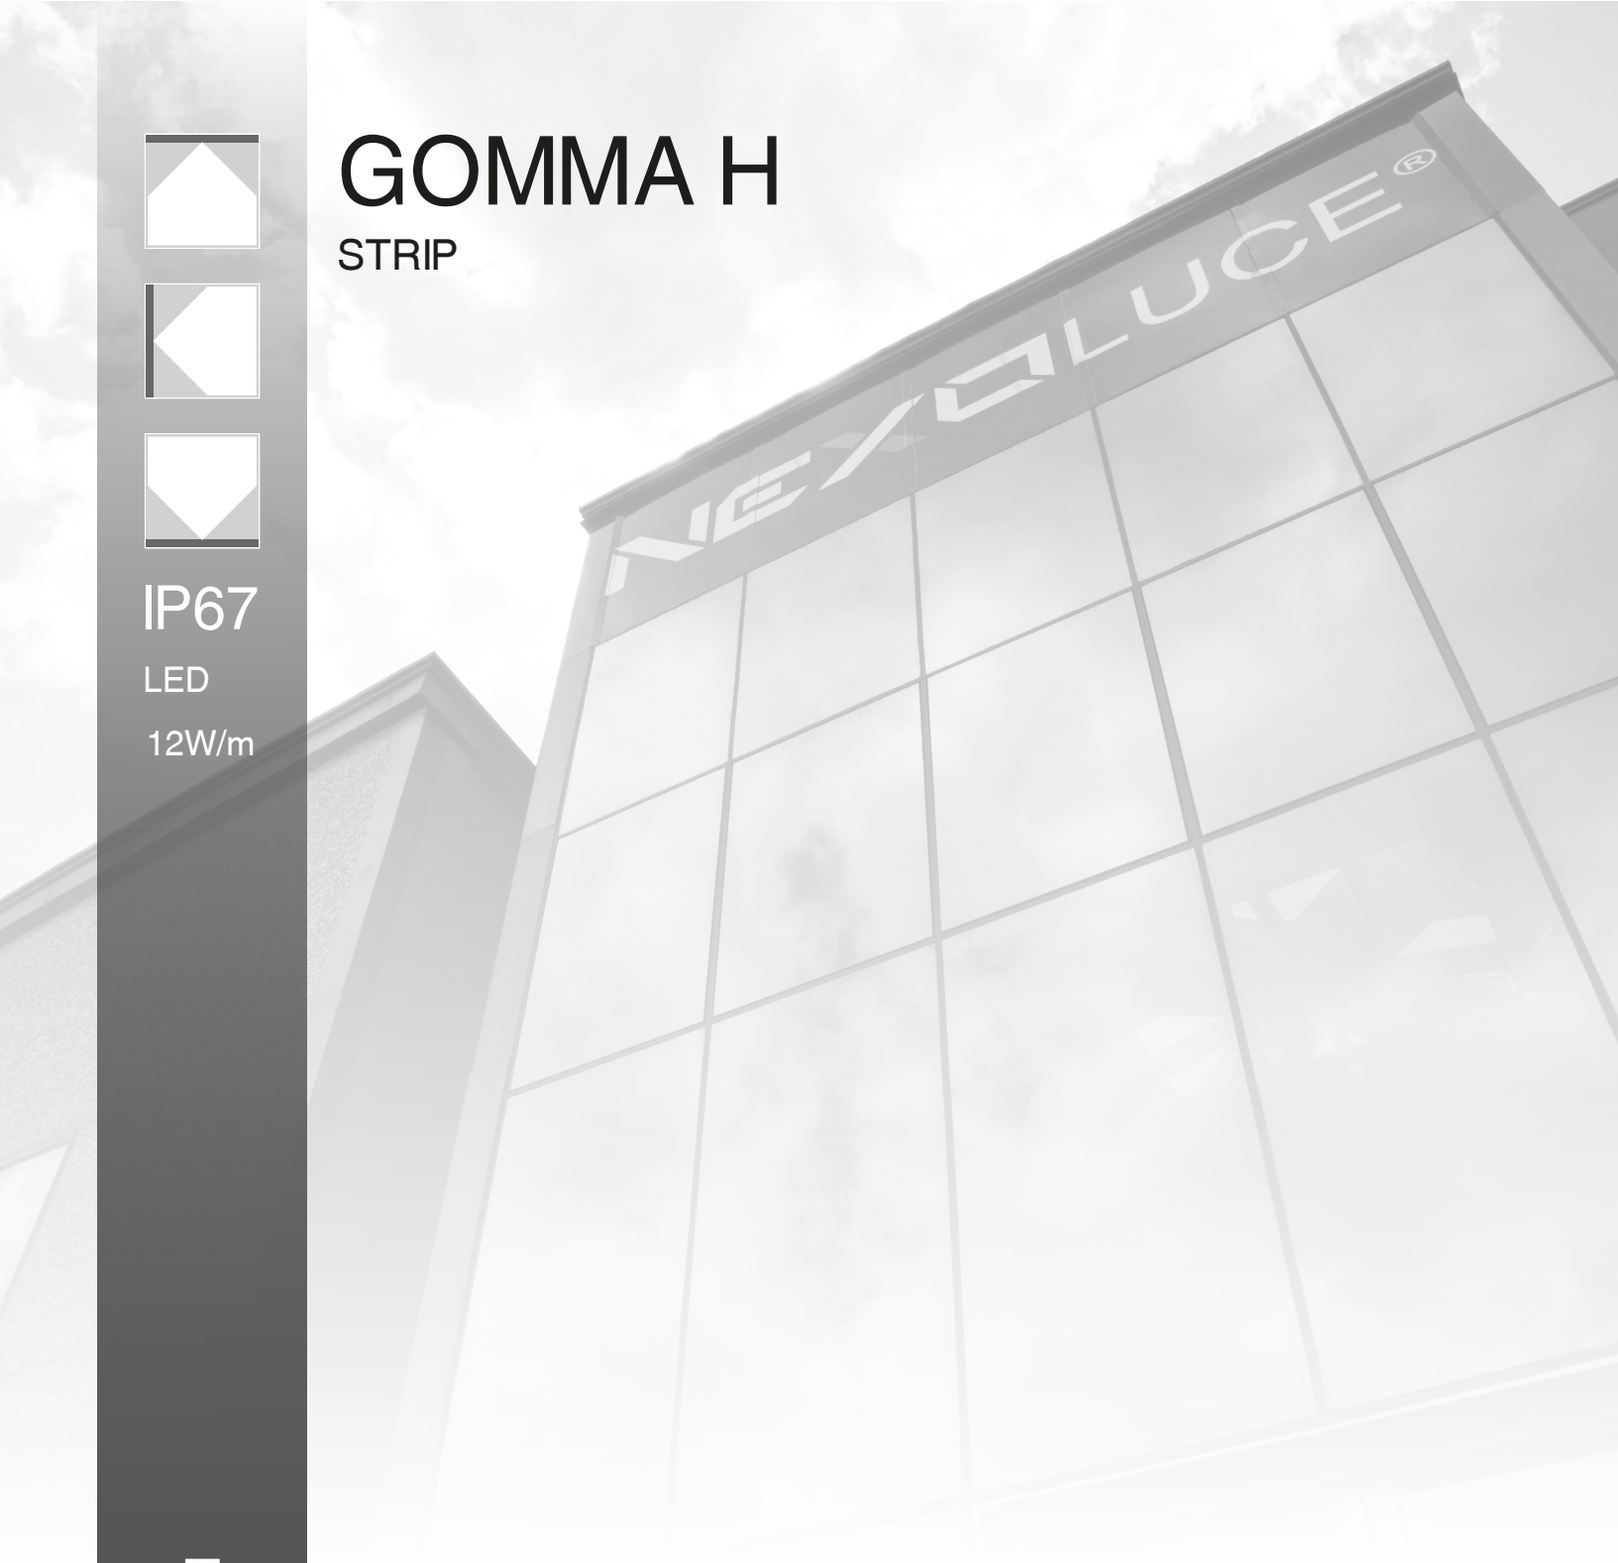

cod. 5035 /// GOMMA H

ACCESSORIES (CAN BE ASSEMBLED BY END USER)

BOTTOM CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0143.0**

SIDE CONNECTOR IP67
(Connects light to power supply, cable length 1m)
RIGHT version code: **003.0144.0**
LEFT version code: **003.0145.0**

FRONT CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0133.0**

END CAP IP67
(Termination protection of the light)
code: **003.0134.0**

JUMPER IP67
(Connects two pieces of lights together with a flexible cable)
Cable length 0.3m code: **003.0135.0**
Cable length 1m code: **003.0146.0**
Cable length 3m code: **003.0147.0**

POWER T-FEED IP67
(Connects two pieces of lights together with a T joint, energized from middle; cables length 0.3m)
code: **003.0136.0**

SPRING CLIP ALUMINIUM PROFILE
Width: 20,7mm, Height 22,3 mm,
Length 500mm code: **003.0139.H**
Length 1000mm code: **003.0138.H**
Length 2000mm code: **003.0137.H**

INSTALLATION WAY

PLASTIC PROFILE
Width: 19mm, Height 21 mm,
Length 500mm code: **003.0142.0**
Length 1000mm code: **003.0141.0**
Length 2000mm code: **003.0140.0**

INSTALLATION WAY



BENDABLE STAINLESS STEEL PROFILE
Width: 17,5mm, Height 20,0 mm,
Length 300mm code: **003.0148.G**
Length 500mm code: **003.0149.G**
Length 900mm code: **003.0150.G**

INSTALLATION WAY

MALE & FEMALE CONNECTOR IP68
code: **003.0151.0**

CUTTER
(It is necessary for the correct cutting of the light for assembly of the accessory connectors) code: **003.0161.0**



INDUCER
(It is necessary for the correct insertion of the pins of the accessory connectors into the light) code: **003.0162.0**

GOMMA V

STRIP

IP67

LED

12W/m

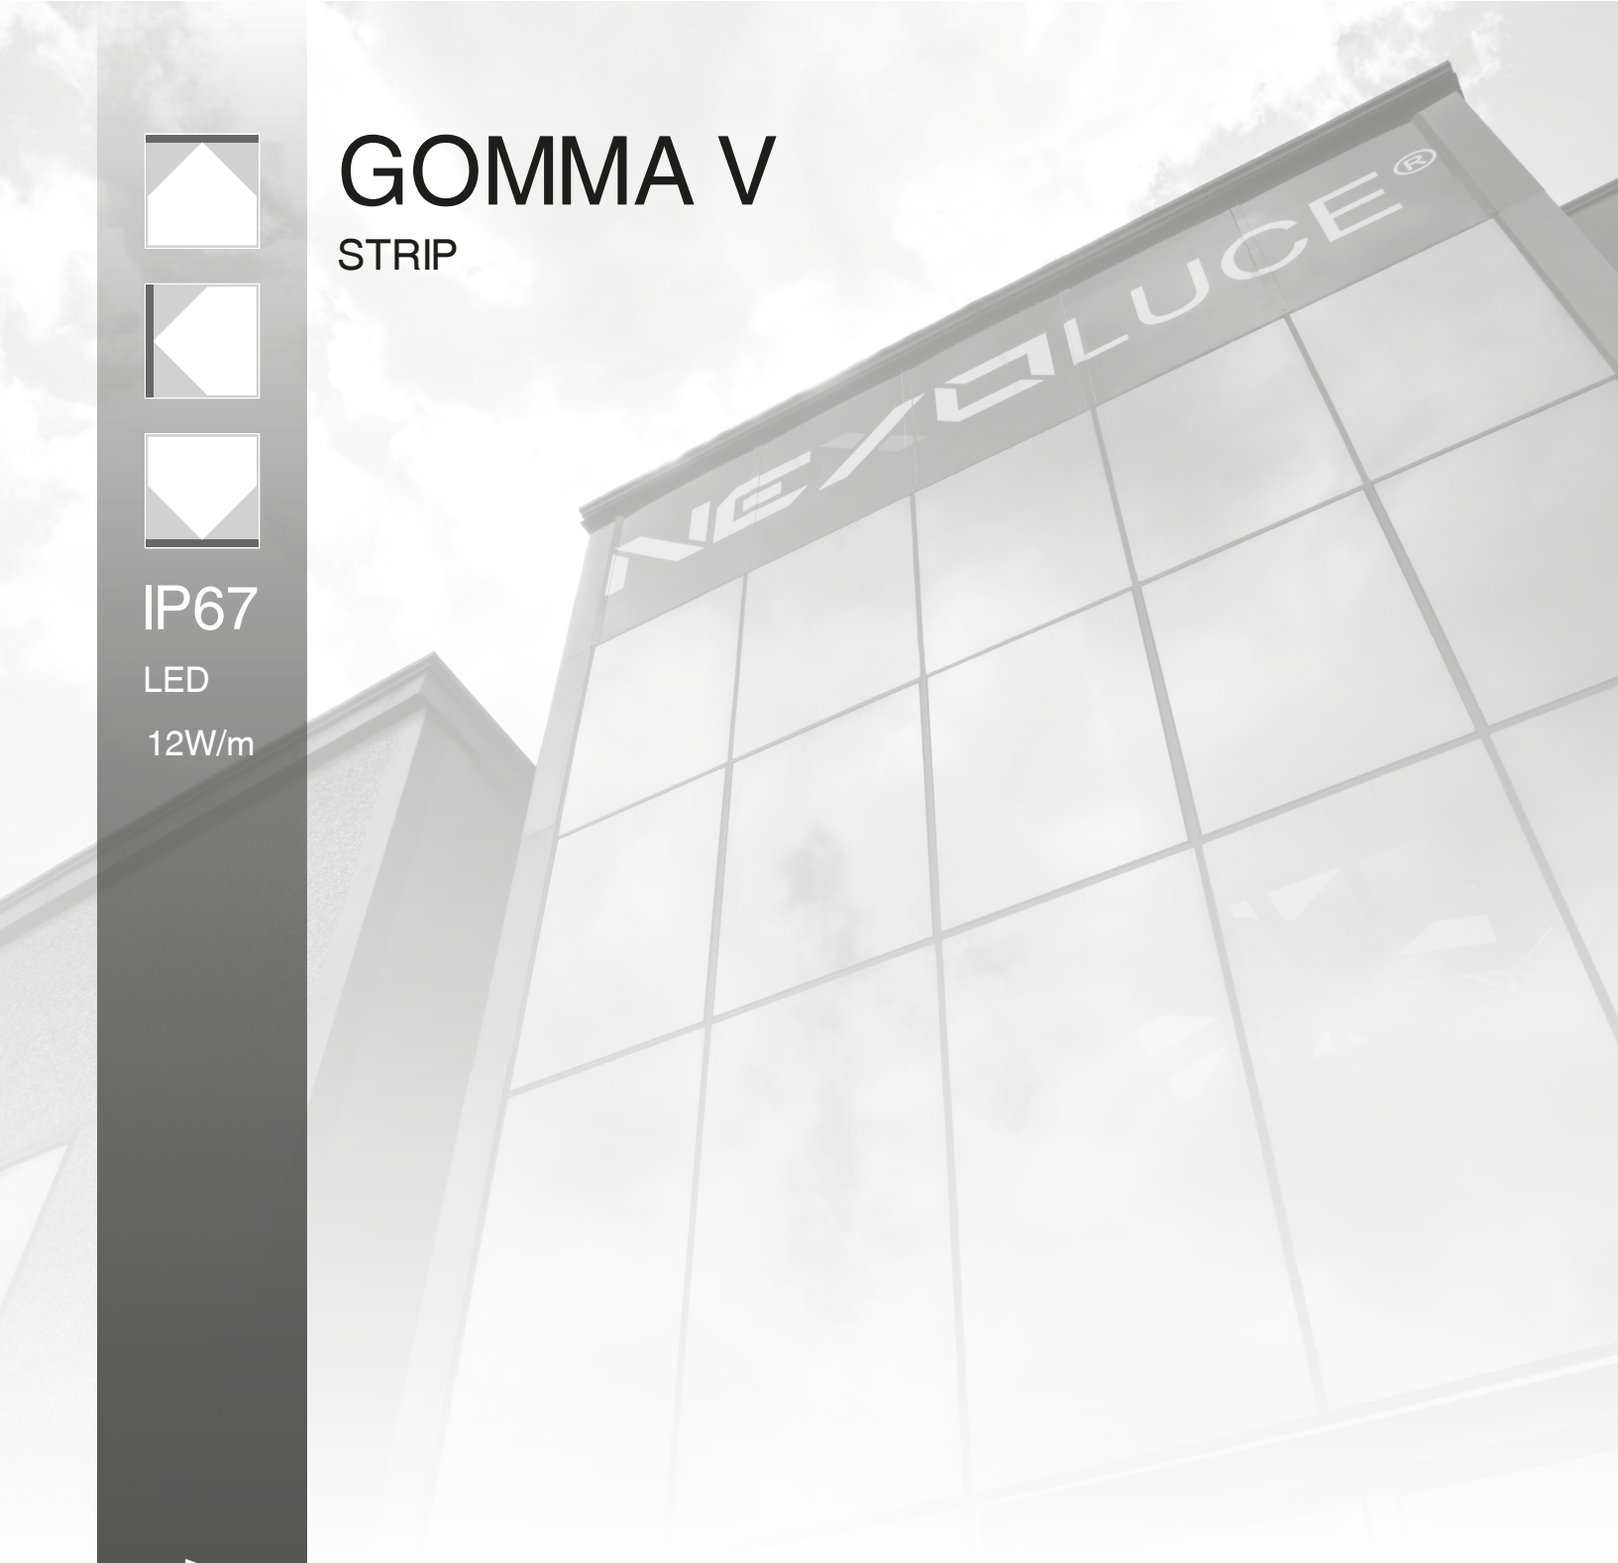

cod. 5034 /// GOMMA V

ACCESSORIES (CAN BE ASSEMBLED BY END USER)

BOTTOM CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0152.0**

SIDE CONNECTOR IP67
(Connects light to power supply, cable length 1m)
RIGHT version code: **003.0153.0**
LEFT version code: **003.0154.0**

FRONT CONNECTOR IP67
(Connects light to power supply, cable length 1m)
code: **003.0155.0**

END CAP IP67
(Termination protection of the light)
code: **003.0156.0**

JUMPER IP67
(Connects two pieces of lights together with a flexible cable)
Cable length 0.3m code: **003.0158.0**
Cable length 1m code: **003.0159.0**
Cable length 3m code: **003.0160.0**

POWER T-FEED IP67
(Connects two pieces of lights together with a T joint, energized from middle; cables length 0.3m)
code: **003.0157.0**

SPRING CLIP ALUMINIUM PROFILE
Width: 20,7mm, Height 22,3 mm,
Length 500mm code: **003.0139.H**
Length 1000mm code: **003.0138.H**
Length 2000mm code: **003.0137.H**

INSTALLATION WAY

PLASTIC PROFILE
Width: 19mm, Height 21 mm,
Length 500mm code: **003.0142.0**
Length 1000mm code: **003.0141.0**
Length 2000mm code: **003.0140.0**

INSTALLATION WAY



BENDABLE STAINLESS STEEL PROFILE
Width: 17,5mm, Height 20,0 mm,
Length 300mm code: **003.0148.G**
Length 500mm code: **003.0149.G**
Length 900mm code: **003.0150.G**

INSTALLATION WAY

MALE & FEMALE CONNECTOR IP68
code: **003.0151.0**

CUTTER
(It is necessary for the correct cutting of the light for assembly of the accessory connectors) code: **003.0161.0**



INDUCER
(It is necessary for the correct insertion of the pins of the accessory connectors into the light) code: **003.0162.0**

IP20

BINARIO 2

TRACK

BINARIO 2

ACCESSORIES

1



Right live-end / *Alimentatore Dx*



code*:* **001.0186.A** White / *Bianco*
code*:* **001.0187.D** Black / *Nero*

2



Left live-end / *Alimentatore Sx*



code*:* **001.0188.A** White / *Bianco*
code*:* **001.0189.D** Black / *Nero*

3



Inside L joint / *Giunto L interno*



code*:* **001.0190.A** White / *Bianco*
code*:* **001.0191.D** Black / *Nero*

4



Outside L joint / *Giunto L esterno*



code*:* **001.0192.A** White / *Bianco*
code*:* **001.0193.D** Black / *Nero*

5



Right T joint / *Giunto T DX*



code*:* **001.0194.A** White / *Bianco*
code*:* **001.0195.D** Black / *Nero*

6



Left T joint / *Giunto T SX*



code*:* **001.0196.A** White / *Bianco*
code*:* **001.0197.D** Black / *Nero*

7



X joint / *Giunto X*

code*:* **001.0198.A** White / *Bianco*
code*:* **001.0199.D** Black / *Nero*

8



Electrical straight joint / *Giunto lineare con contatti*

code*:* **001.0200.A** White / *Bianco*
code*:* **001.0201.D** Black / *Nero*

9



Central connector and straight joint / *Alimentazione centrale e giunto lineare*

code*:* **001.0202.A** White / *Bianco*
code*:* **001.0203.D** Black / *Nero*

10



Flexible joint / *Giunto flessibile*

code*:* **001.0204.A** White / *Bianco*
code*:* **001.0205.D** Black / *Nero*

11



Dead end cap / *Tappo di chiusura*

code*:* **001.0206.A** White / *Bianco*
code*:* **001.0207.D** Black / *Nero*

12



Ceiling kit / *Kit attacco soffitto*

code*:* **001.0208.A** White / *Bianco*
code*:* **001.0209.D** Black / *Nero*

13

Suspension kit with steel wire 1500mm / *Kit sospensione cavo in acciaio 1500mm*

code*:* **001.0210.A** White / *Bianco*
code*:* **001.0211.D** Black / *Nero*

Track connection / *Connessione binario e accessori*

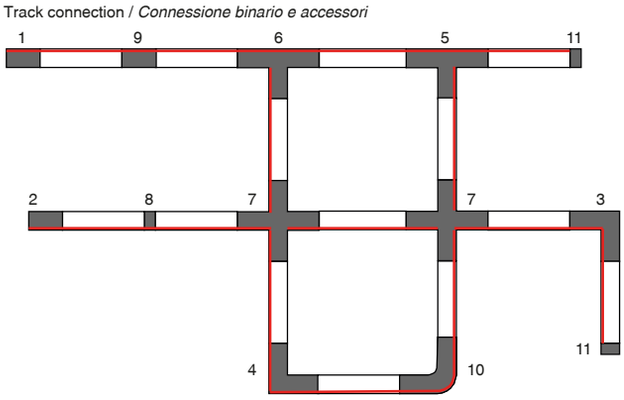

View from the floor to the ceiling / *Vista dal pavimento verso il soffitto*
The red line indicates the continuity of the ground line / *La linea rossa indica la continuità della linea di messa a terra*

BINARIO 2 R

TRACK

IP20

BINARIO 2 R

ACCESSORIES

1



Right live-end / *Alimentatore Dx*



code*:* **001.0212.A** White / *Bianco*
code*:* **001.0213.D** Black / *Nero*

2



Left live-end / *Alimentatore Sx*



code*:* **001.0214.A** White / *Bianco*
code*:* **001.0215.D** Black / *Nero*

3



Inside L joint / *Giunto L interno*



code*:* **001.0216.A** White / *Bianco*
code*:* **001.0217.D** Black / *Nero*

4



Outside L joint / *Giunto L esterno*



code*:* **001.0218.A** White / *Bianco*
code*:* **001.0219.D** Black / *Nero*

5



Right T joint / *Giunto T DX*



code*:* **001.0220.A** White / *Bianco*
code*:* **001.0221.D** Black / *Nero*

6



Left T joint / *Giunto T SX*



code*:* **001.0222.A** White / *Bianco*
code*:* **001.0223.D** Black / *Nero*

7



X joint / *Giunto X*

code*:* **001.0224.A** White / *Bianco*
code*:* **001.0225.D** Black / *Nero*

8



Electrical straight joint / *Giunto lineare con contatti*

code*:* **001.0200.A** White / *Bianco*
code*:* **001.0201.D** Black / *Nero*

9



Central connector and straight joint / *Alimentazione centrale e giunto lineare*

code*:* **001.0226.A** White / *Bianco*
code*:* **001.0227.D** Black / *Nero*

10



Dead end cap / *Tappo di chiusura*

code*:* **001.0206.A** White / *Bianco*
code*:* **001.0207.D** Black / *Nero*

11



Ceiling kit / *Kit attacco soffitto*

code*:* **001.0208.A** White / *Bianco*
code*:* **001.0209.D** Black / *Nero*

12

Suspension kit with steel wire 1500mm / *Kit sospensione cavo in acciaio 1500mm*

code*:* **001.0210.A** White / *Bianco*
code*:* **001.0211.D** Black / *Nero*

Track connection / *Connessione binario e accessori*

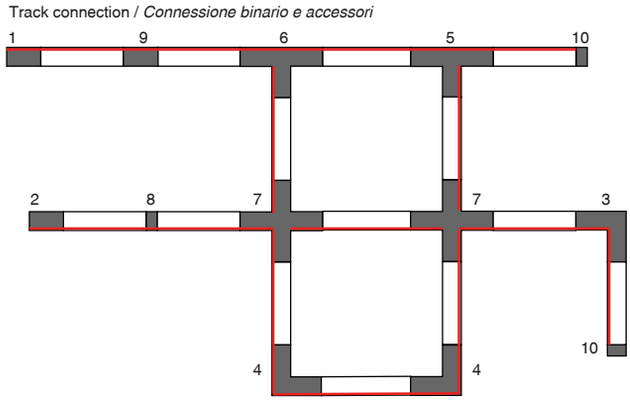

View from the floor to the ceiling / *Vista dal pavimento verso il soffitto*
The red line indicates the continuity of the ground line / *La linea rossa indica la continuità della linea di messa a terra*

SYMBOLOGY

Classification

Fixtures classification on the basis of electric insulation degree

Class I
Device connected to ground circuit

Class II
Device not connected to ground circuit

Class III
Device connected with low voltage

Fixtures classification on the basis of flammability degree of stand surfaces

F — Device that can be installed in contact with normally inflammable surfaces

IK prefix indicates resistant degree to external mechanical strikes

IK09 — Protected against a strike of 10J energy

IK10 — Protected against a strike of 20J energy

General symbolism

CE — Compliant of the european community directives

Compliant of the european community directives

Specific symbolism

T 35°C — Maximum operating temperature

5000 N — Maximum bearable load

Kg x.xx — Net weight

Recessed cutting hole

Emission characteristics

Ground emission

Wall emission

Ceiling emission

Narrow emission

Single Asymmetrical wall emission

Double asymmetrical wall emission

'Star effect' optic

Tilt rotation

+/-60° — Pan rotation

IP *(International Protection)*

The fixture's protection degree is specified by prefix IP followed by two figures: the first indentifies the protection degree against entrance of solid bodies while the second against liquides

IP protection degree
first figure

2_ Protected against penetration of solid objects larger than 12mm

3_ Protected against penetration of solid objects larger than 2.5mm

4_ Protected against penetration of solid objects larger than 1mm

5_ Protected against dust

6_ Completely protected against dust

IP protection degree
second figure

_0 Not protected

_1 Protected against dripping

_3 Protected against rain

_4 Protected against spurtes

_5 Protected against water projections

_6 Protected against water projections on pressure

_7 Resistant to immersion

_8 Resistant to submersion

CODES STRUCTURE

Standard code

CODE	VARIABLE	IP RATING	LIGHT	WATT	OPTIC	CONTROL	FRAME COLOR
5199	**.** WITHOUT EM. KIT	**5** IP65	**B** 3000 K	**.10** 10 W	**AR** 90°	**1** ON / OFF	**.A** WHITE
	B 3H EM. KIT IN SEPAR. BOX		**C** 4000 K		**.Z** 120°		

CODE EXAMPLE:
Recessed downlight with warm white light color at 3000K, IP65, 10W, 90° optic, ON/OFF control, frame white color without emergency kit **5199.5B.10AR1.A**

Riga code

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	OPTIC	CONTROL	LENGTH
5115	**1**	**1** IP20	**B** 3000 K	**.7M** 7 W / m	**.R** 120° CLEAR	**6** 24 V DC	**05** 0,5 m
		5 IP65	**C** 4000 K		**.S** 120° FROST		**10** 1,0 m

CODE EXAMPLE:
Strip led into profile with warm white light color at 3000K, IP20, 7W/m, 120° clear optic, 24VDC, 1.0m lenght **511511B.7M.R610**

Strip Inlux led code

CODE	VARIABLE	IP RATING	LIGHT COLOR	WATT	VERSION	CONTROL	LENGTH
5039	**1**	**1** IP20	**B** 3000 K	**15M** 15 W / m	**MC** MALE CONNECTION	**6** 24 V DC	**50** 5.0 m
		5 IP65	**C** 4000 K		**MF** MALE-FEMALE CONNECTIONS		**XX** *m on request

CODE EXAMPLE:
Strip led with warm white light color at 3000K, IP20, 15W/m, male connection, 24VDC, 5.0m lenght **503911B15MMC650**

© INLUX ITALIA, a brand of NEXO LUCE Srl, 2020
Project by NEXO LUCE Srl
Printed in June 2020

NEXO LUCE Srl
Strada Mirabella, 10
46040 Cavriana (MN)
ITALY

T +39 0376 771513
F +39 0376 772235
inluxitalia.com

95001400 ENG